

Acer TravelMate 8572/8572G Service Guide

Service guide files and updates are available on the ACER/CSD web; for more information, please refer to <http://csd.acer.com.tw>

Revision History

Please refer to the table below for the updates made on this service guides.

Date	Chapter	Updates

Copyright

Copyright © 2010 by Acer Incorporated. All rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise, without the prior written permission of Acer Incorporated.

Disclaimer

The information in this guide is subject to change without notice.

Acer Incorporated makes no representations or warranties, either expressed or implied, with respect to the contents hereof and specifically disclaims any warranties of merchantability or fitness for any particular purpose. Any Acer Incorporated software described in this manual is sold or licensed "as is". Should the programs prove defective following their purchase, the buyer (and not Acer Incorporated, its distributor, or its dealer) assumes the entire cost of all necessary servicing, repair, and any incidental or consequential damages resulting from any defect in the software.

Acer is a registered trademark of Acer Corporation.

Intel is a registered trademark of Intel Corporation.

Other brand and product names are trademarks and/or registered trademarks of their respective holders.

Conventions

The following conventions are used in this manual:

SCREEN MESSAGES	Denotes actual messages that appear on screen.
NOTE	Gives bits and pieces of additional information related to the current topic.
WARNING	Alerts you to any damage that might result from doing or not doing specific actions.
CAUTION	Gives precautionary measures to avoid possible hardware or software problems.
IMPORTANT	Reminds you to do specific actions relevant to the accomplishment of procedures.



NOTE: This symbol where placed in the Service Guide designates a component that should be recycled according to the local regulations.

Preface

Before using this information and the product it supports, please read the following general information.

1. This Service Guide provides you with all technical information relating to the BASIC CONFIGURATION decided for Acer's "global" product offering. To better fit local market requirements and enhance product competitiveness, your regional office MAY have decided to extend the functionality of a machine (e.g. add-on card, modem, or extra memory capability). These LOCALIZED FEATURES will NOT be covered in this generic service guide. In such cases, please contact your regional offices or the responsible personnel/channel to provide you with further technical details.
2. Please note WHEN ORDERING FRU PARTS, that you should check the most up-to-date information available on your regional web or channel. If, for whatever reason, a part number change is made, it will not be noted in the printed Service Guide. For ACER-AUTHORIZED SERVICE PROVIDERS, your Acer office may have a DIFFERENT part number code to those given in the FRU list of this printed Service Guide. You MUST use the list provided by your regional Acer office to order FRU parts for repair and service of customer machines.

System Specifications	1
Features	1
System Block Diagram	6
Your Acer Notebook tour	7
Front View	7
Closed Front View	8
Closed Rear View	9
Left View	9
Right View	10
Bottom View	10
Indicators	12
TouchPad Basics	13
Using the Keyboard	14
Lock Keys and embedded numeric keypad	14
Windows Keys	15
Hot Keys	16
Hardware Specifications and Configurations	17
System Utilities	29
BIOS Setup Utility	29
Navigating the BIOS Utility	29
BIOS	30
Information	30
Main	31
Security	32
Boot	35
Exit	36
BIOS Flash Utilities	37
DOS Flash Utility	38
WinFlash Utility	39
Remove HDD/BIOS Password Utilities	40
Machine Disassembly and Replacement	45
Disassembly Requirements	45
General Information	46
Pre-disassembly Instructions	46
Disassembly Process	46
External Module Disassembly Process	47
External Modules Disassembly Flowchart	47
Removing the Battery Pack	48
Removing the SD dummy card	49
Removing the Lower Cover	50
Removing the HDD Module	51
Removing the DIMM Modules	54
Removing the 3G Module	55
Removing the WLAN Module	56
Removing the Optical Drive Module	58
Main Unit Disassembly Process	60
Main Unit Disassembly Flowchart	60
Removing the Keyboard	62
Lift the keyboard clear of the chassis.	63
Removing the Upper Cover	64
Removing the Power/WiFi Switch Board	68
Removing the Fingerprint Board	70

Table of Contents

Removing the USB Board	72
Removing the Modem Module	74
Removing the Bluetooth Module	76
Removing the Speaker FCC	78
Removing the Mainboard	79
Removing the RTC Battery	81
Removing the PCH Heatsink	82
Removing the Thermal Module	83
Removing the CPU	85
Removing the LCD Module	86
LCD Module Disassembly Process	88
LCD Module Disassembly Flowchart	88
Removing the LCD Bezel	89
Removing the Camera Module	92
Removing the LCD Panel	93
Removing the LVDS Cable	95
LCD Module Reassembly Procedure	96
Replacing the LVDS Cable	96
Replacing the LCD Panel	97
Replacing the Camera Module	99
Replacing the LCD Bezel	100
Replacing the LCD Module	101
Replacing the CPU	103
Removing the Thermal Module	104
Replacing the PCH Heatsink	106
Replacing the RTC Battery	107
Removing the Mainboard	108
Replacing the Speaker FCC	110
Replacing the Bluetooth Module	111
Replacing the Modem Module	113
Replacing the USB Board	115
Replacing the Fingerprint Board	117
Removing the Power/WiFi Switch Board	119
Removing the Upper Cover	120
Replacing the Keyboard	124
Replacing the Optical Drive Module	126
Replacing the WLAN Module	128
Replacing the 3G Module	130
Replacing the DIMM Modules	132
Removing the HDD Module	133
Replacing the Lower Cover	136
Replacing the SD dummy card	137
Replacing the Battery Pack	138

Troubleshooting 139

Common Problems	139
Power On Issue	140
No Display Issue	141
Random Loss of BIOS Settings	142
LCD Failure	143
Built-In Keyboard Failure	143
TouchPad Failure	144
Internal Speaker Failure	144
HDD Not Operating Correctly	146
ODD Failure	147

Table of Contents

Wireless Function Failure	150
Thermal Unit Failure	150
External Mouse Failure	151
Other Failures	151
Intermittent Problems	152
Undetermined Problems	152
Post Codes	153
Jumper and Connector Locations	157
Top View	157
Bottom View	158
Clearing Password Check and BIOS Recovery	159
Clearing Password Check	159
BIOS Recovery by Crisis Disk	160
FRU (Field Replaceable Unit) List	161
Exploded Diagrams	162
LCD Assembly	162
Acer TravelMate 8572/8572G FRU List	164
Screw List	176
Model Definition and Configuration	178
Test Compatible Components	309
Online Support Information	313
Index	315

Table of Contents

System Specifications

Features

Below is a brief summary of the computer's many features:

NOTE: Items denoted with an (*) are only available for selected models.

Operating System

- Genuine Windows® 7 Professional 32-bit
- Genuine Windows® 7 Home Premium 64-bit

Platform

- Intel® Core™ i7-620M processor (4 MB L3 cache, 2.66 GHz with Turbo Boost up to 3.33 GHz, DDR3 1066 MHz, 35 W), supporting Intel® 64 architecture, Intel® Smart Cache
- Intel® Core™ i5-430M/i5-520M/i5-540M processor (3 MB L3 cache, 2.26/2.40/2.53 GHz with Turbo Boost up to 2.53/2.93/3.06 GHz, DDR3 1066 MHz, 35 W), supporting Intel® 64 architecture, Intel® Smart Cache
- Intel® Core™ i3-330M/i3-350M processor (3 MB L3 cache, 2.13/2.26 GHz, DDR3 1066 MHz, 35 W), supporting Intel® 64 architecture, Intel® Smart Cache
- Mobile Intel® HM55 Express Chipset

System Memory

- Dual-channel DDR3 SDRAM support:
 - Up to 4 GB of DDR3 system memory, upgradable to 8 GB using two soDIMM modules⁵ (for 64-bit OS)
 - Up to 2 GB of DDR3 system memory, upgradable to 4 GB using two soDIMM modules⁶ (for 32-bit OS)

Display

- 15.6" HD 1366 x 768 pixel resolution, high-brightness LED backlit TFT LCD

Graphics

- 15.6" HD 1366 x 768 pixel resolution, high-brightness LED backlit TFT LCD
- Mercury free, environment friendly
- Super-slim design
- Anti-glare coating
- Dual independent display support
- 16.7 million colors
- External resolution / refresh rates:
8572G
 - NVIDIA® GeForce® GT 330M with switchable graphics technology, up to 46067 MB of TurboCache™ (1024 MB of dedicated DDR3 VRAM, up to 35828 MB of shared system memory), supporting NVIDIA® CUDA™, PhysX™, PureVideo® HD technology, OpenEXR High Dynamic-Range (HDR) technology, Shader Model 4.0, Microsoft® DirectX® 10.1
 - NVIDIA® GeForce® GT 310M with switchable graphics technology, up to 40947 MB of TurboCache™ (512 MB of dedicated DDR3 VRAM, up to 35828 MB of shared system memory), supporting NVIDIA® CUDA™, PhysX™, PureVideo® HD technology, OpenEXR High Dynamic-Range (HDR) technology, Shader Model 4.0, Microsoft® DirectX® 10.1**8572**
 - Intel® HD Graphics with 128 MB of dedicated system memory, supporting Microsoft® DirectX® 10

Audio

- Two built-in stereo speakers
- High-definition audio support
- Built-in microphone
- MS-Sound compatible

Storage

Hard disk drive:

- 160/250/320/500/640 GB or larger, with enhanced Acer DASP (Disk Anti-Shock Protection)

Multi-in-1 card reader:

- Secure Digital™ (SD) Card, MultiMediaCard (MMC), Memory Stick™ (MS), Memory Stick PRO™ (MS PRO), xD-Picture Card™ (xD)

Optical Drive

- 8X DVD-Super Multi double-layer drive:
 - Read: 24X CD-ROM, 24X CD-R, 24X CD-RW, 8X DVD-ROM, 8X DVD-R, 8X DVD+R, 6X DVD-ROM DL, 6X DVD-R DL, 6X DVD+R DL, 6X DVD-RW, 6X DVD+RW, 5X DVD-RAM
 - Write: 24X CD-R, 16X CD-RW, 8X DVD-R, 8X DVD+R, 4X DVD-R DL, 4X DVD+R DL, 6X DVD-RW, 8X DVD+RW, 5X DVD-RAM

Communication

Webcam:

- Acer Video Conference, featuring:
 - Integrated Acer Crystal Eye webcam with 1280 x 1024 resolution
 - Acer Video Conference Manager software, featuring Video Quality Enhancement (VQE) technology, supporting 1280 x 1024 resolution online video calls
 - Acer PureZone technology

Wireless and networking:

- WLAN:
 - Acer InViLink™ Nplify™ 802.11b/g/n Wi-Fi CERTIFIED™
 - Acer InViLink™ Nplify™ 802.11b/g Wi-Fi CERTIFIED™
 - Supporting Acer SignalUp™ wireless technology
- WPAN:
 - Bluetooth® 3.0+HS
 - Bluetooth® 2.1+EDR
- LAN: Gigabit Ethernet, Wake-on-LAN ready
- Modem: 56K V.92 , Wake-on-Ring ready

Privacy control

- Enhanced Acer DASP (Disk Anti-Shock Protection)
- Acer Bio-Protection fingerprint solution featuring Pre-Boot Authentication (PBA), computer protection, Acer FingerLaunch
- BIOS user, supervisor, HDD passwords
- Support TPM version 1.2
- Kensington lock slot

Dimensions and weight

- 379 (W) x 253 (D) x 27.7/32 (H) mm (14.92 x 9.96 x 1.09/1.26 inches)
- 2.6 kg (5.73 lbs.) with 6-cell battery pack

Power subsystem

- ACPI 3.0 CPU power management standard: supports Standby and Hibernation power-saving modes
- 66 W 6000 mAh 6-cell Li-ion standard battery pack
- Battery life: 4.5 hours
- ENERGY STAR®

8572G

- 3-pin 90 W AC adapter:
 - 133 (W) x 59 (D) x 31 (H) mm (5.23 x 2.32 x 1.22 inches)
 - 390 g (0.86 lbs.) with 180 cm DC cable

8572

- 3-pin 65 W AC adapter:
 - 108 (W) x 46 (D) x 29.5 (H) mm (4.25 x 1.81 x 1.16 inches)
 - 225 g (0.49 lbs.) with 180 cm DC cable

Special keys and controls

Keyboard:

- 105-/106-/109-key Acer FineTouch keyboard with independent standard numeric keypad, international language support, dedicated US dollar and Euro symbol keys

Touchpad:

- Multi-gesture touchpad, supporting two-finger scroll, pinch, rotate, flip
- Media keys
- Media control keys (printed on keyboard): play/pause, stop, previous, next, volume up, volume down

Control keys:

- Acer PowerSmart or programmable key
- Communication key

I/O interface

- Acer EasyPort IV connector
- Acer Bio-Protection fingerprint reader
- Multi-in-1 card reader (SD™, MMC, MS, MS PRO, xD)
- Four USB 2.0 ports
- External display (VGA) port
- Headphone/speaker/line-out jack
- Microphone-in jack
- Ethernet (RJ-45) port
- Modem (RJ-11) port
- DC-in jack for AC adapter

Software

Productivity:

- Acer Backup Manager
- Acer ePower Management
- Acer eRecovery Management
- Acer Optical Drive Power Management (for models with ODD eject button)
- Acer PowerSmart Manager
- Microsoft® Office Personal 2007 (Service Pack 2) (Japan only, subject to customer request)

-
- Microsoft® Office Ready (Service Pack 2)
 - Google Toolbar™
 - Adobe® Flash® Player 10
 - Adobe® Reader® 9.1
 - eSobi™
 - Norton™ Online Backup

Security:

- Acer Bio-Protection (for models with fingerprint reader)
- McAfee® Internet Security Suite Trial

Multimedia:

- Corel® WinDVD
- NTI Media Maker™

Communication and ISP:

- Acer Crystal Eye
- Acer Video Conference Manager
- Microsoft® Silverlight™
- Skype™
- Windows Live™ Essentials - Wave 3.2 (Mail, Photo Gallery, Live™ Messenger, Movie Maker, Writer)

Utilities and tools:

- Acer Accessory Store (Belgium, France, Germany, Italy, Netherlands, Spain, Sweden, UK only)
- Acer Identity Card
- Acer Registration
- Acer Updater
- eBay® shortcut 2009 (Canada, France, Germany, Italy, Mexico, Spain, UK, US only)
- Netflix shortcut (US only)

Optional Items

- Acer EasyPort IV
- 1 GB / 2 GB DDR3 1066 MHz soDIMM module

Warranty


- One-year International Travelers Warranty (ITW)

Environment

- Temperature:
 - Operating: 5 °C to 35 °C
 - Non-operating: -20 °C to 65 °C
- Humidity (non-condensing):
 - Operating: 20% to 80%
 - Non-operating: 20% to 80%

NOTE: The specifications listed above are for reference only. The exact configuration of the PC depends on the model purchased.

System Block Diagram

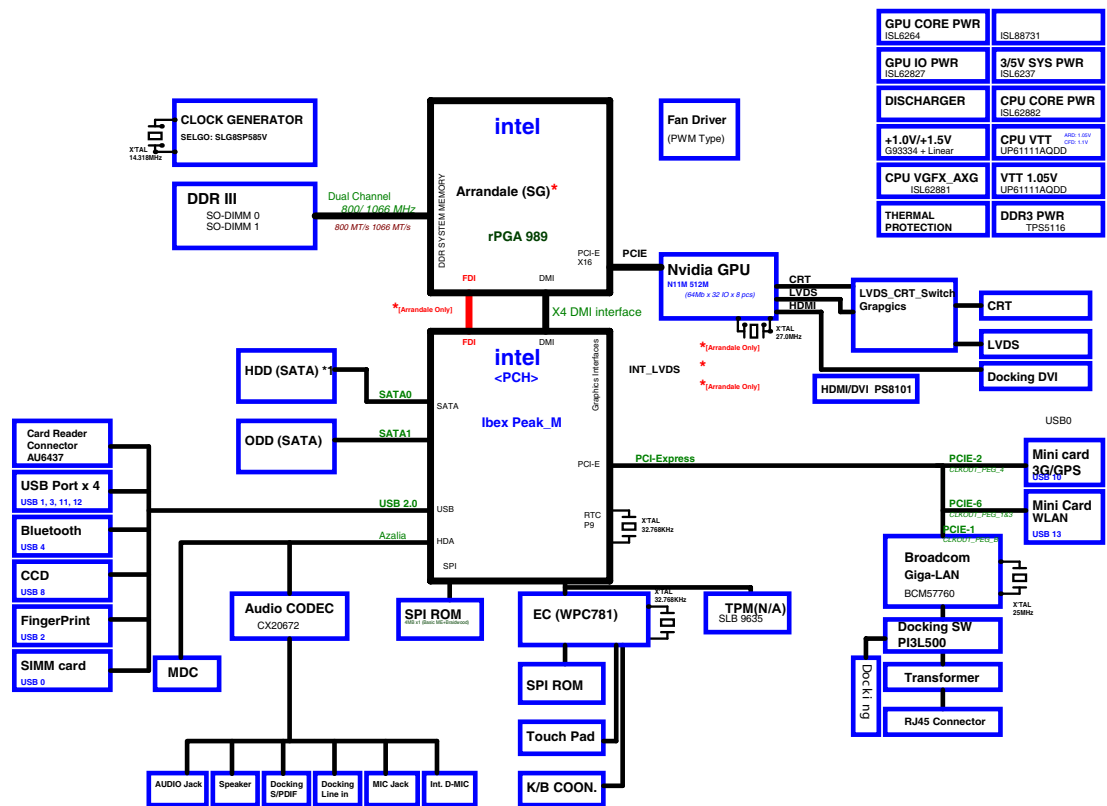

Your Acer Notebook tour


Front View



No.	Icon	Item	Description
1		Acer Crystal Eye webcam	Web camera for video communication (for selected models).
2		Microphone	Stereo internal microphones for sound recording.
3		Display screen	Also called Liquid-Crystal Display (LCD), displays computer output (Configuration may vary by models).
4		Keyboard	For entering data into your computer.
5		Acer Bio-Protection fingerprint reader	The center button serves as the Acer Bio-Protection fingerprint reader, supporting Pre-Boot Authentication (PBA) computer protection, Acer FingerLaunch.
6		Click buttons (left and right)	The left and right buttons function like the left and right mouse buttons.
7		TouchPad	Touch-sensitive pointing device which functions like a computer mouse.


No.	Icon	Item	Description
8		Power button	Turns the computer on and off.
		Acer PowerSmart key	Puts your computer into power-saving mode (configuration may vary by model).
		P key	Programmable key (configuration may vary by model).
9		Optical drive eject button	Ejects the optical disk from the drive.
10		Communication indicator	Indicates the computer's wireless connectivity device status.

Closed Front View

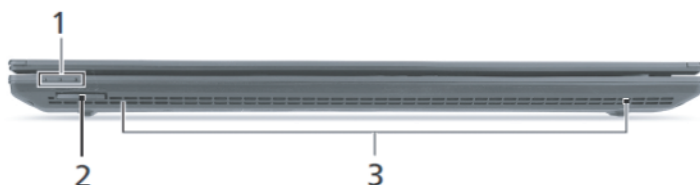


No.	Icon	Item	Description
1		Power Indicator	Indicates the computer's power status.
		Battery	Indicates the computer's battery status. 1. Charging: The light shows amber when the battery is charging. 2. Fully charged: The light shows green when in AC mode.
		HDD Indicator	Indicates when the hard disk drive is active.
2		Multi-in-1 card reader	Accepts Secure Digital (SD), MultiMediaCard (MMC), Memory Stick (MS), Memory Stick PRO (MS PRO), xD-Picture Card (xD). Note: Push to remove/install the card. Only one card can operate at any given time.
3		Speakers	Front left and front right speakers deliver stereo audio output.

Closed Rear View

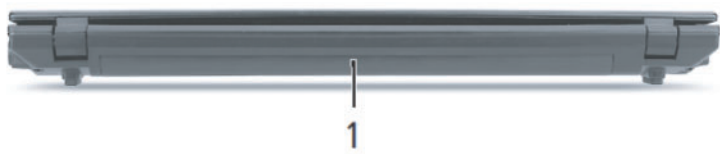

No.	Icon	Item	Description
1		Battery	Provides power for the computer to be used while unplugged.

Left View

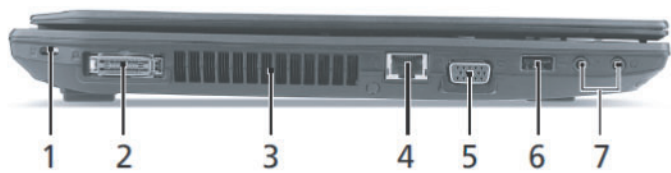


No.	Icon	Item	Description
1		Kensington lock slot 	Connects to a Kensington compatible computer security lock. Note: Wrap the computer security lock cable around an immovable object such as a table or handle of a locked drawer. Insert the lock into the notch and turn the key to secure the lock. Some keyless models are also available.
2		Acer EasyPort connector	Connects to the Acer EasyPort.
3		Ventilation slots	Enable the computer to stay cool, even after prolonged use.
4		Ethernet (RJ-45) port	Connects to an Ethernet 10/100/1000-based network.
5		External display (VGA) port	Connects to a display device (e.g. external monitor, LCD projector).
6		USB 2.0 ports	Connect to USB 2.0 devices (e.g. USB mouse, USB camera).
7		Microphone-in jack	Accepts input from external microphones.
		Headphones/ speaker/line-out jack	Connects to audio line-out devices (e.g. speakers, headphones).

Right View



No.	Icon	Item	Description
1		USB 2.0 ports	Connect to USB 2.0 devices (e.g. USB mouse, USB camera).
2		Modem (RJ-11) port	Connects to a phone line.
3		Optical drive	Internal optical drive; accepts CDs or DVDs.
4		Optical disk access indicator	Lights up when the optical drive is active.
5		Emergency eject hole	Ejects the optical drive tray when the computer is turned off. Note: Insert a paper clip into the emergency eject hole to eject the optical drive tray when the computer is off.
6		DC-in jack	Connects to an AC adapter.

Bottom View

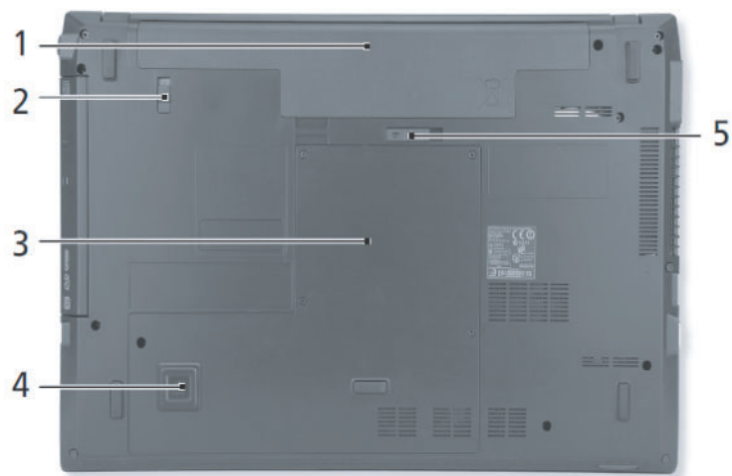

No.	Icon	Item	Description
1		Battery bay	Houses the computer's battery pack.
2		Battery lock	Locks the battery in position.
3		Hard disk bay	Houses the computer's hard disk (secured with screws).
		Memory compartment	Houses the computer's main memory.

No.	Icon	Item	Description
4		Acer DASP (Disk Anti-Shock Protection)	Protects the hard disk from shocks and bumps.
5		Battery release latch	Releases the battery for removal.


Indicators

The computer has several easy-to-read status indicators.

Icon	Function	Description
	Power	Indicates the computer's power status.
	Battery	Indicates the computer's battery status. 1. Charging: The light shows amber when the battery is charging. 2. Fully charged: The light shows green when in AC mode.
	HDD	Indicates when the hard disk drive is active.
	Communication indicator	Indicates the computer's wireless connectivity device status.

TouchPad Basics

The following items show you how to use the TouchPad:

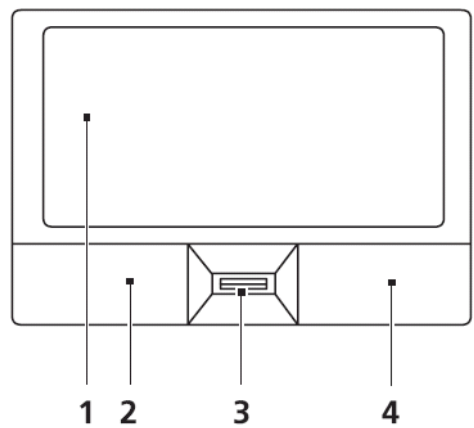

- Move your finger across the TouchPad (1) to move the cursor.
- Press the left (2) and right (4) buttons located beneath the TouchPad to perform selection and execution functions. These two buttons are the equivalent of the left and right buttons on a mouse. Tapping on the TouchPad is the same as clicking the left button.

Function	Left Button (2)	Fingerprint (3)	Right Button (4)	Main TouchPad (1)
Execute	Quickly click twice.	Swipe to launch Pre-Boot Authentication (PBA) computer protection, Acer FingerLaunch.		Tap twice (at the same speed as double-clicking a mouse button).
Select	Click once.			Tap once.
Drag	Click and hold, then use finger on the TouchPad to drag the cursor.			Tap twice (at the same speed as double-clicking a mouse button); rest your finger on the TouchPad on the second tap and drag the cursor.
Access context menu			Click once.	

NOTE: When using the TouchPad, keep it - and your fingers - dry and clean. The TouchPad is sensitive to finger movement; hence, the lighter the touch, the better the response. Tapping too hard will not increase the TouchPad's responsiveness.

Using the Keyboard

The keyboard has full-sized keys and an embedded numeric keypad, separate cursor, lock, Windows, function and special keys.



Lock Keys and embedded numeric keypad

The keyboard has two lock keys which you can toggle on and off.

Lock key	Description
Caps Lock	When Caps Lock is on, all alphabetic characters typed are in uppercase.
Num Lock	When Num Lock is on, the embedded keypad is in numeric mode.
Scroll Lock <Fn> + <F12>	When Scroll Lock is on, the screen moves one line up or down when you press the up or down arrow keys respectively. Scroll Lock does not work with some applications.

Windows Keys

The keyboard has two keys that perform Windows-specific functions.

Key	Description
 Windows key	Pressed alone, this key has the same effect as clicking on the Windows Start button; it launches the Start menu. It can also be used with other keys to provide a variety of functions: <>: Open or close the Start menu <> + <D>: Display the desktop <> + <E>: Open Windows Explore <> + <F>: Search for a file or folder <> + <G>: Cycle through Sidebar gadgets <> + <L>: Lock your computer (if you are connected to a network domain), or switch users (if you're not connected to a network domain) <> + <M>: Minimizes all windows <> + <R>: Open the Run dialog box <> + <T>: Cycle through programs on the taskbar <> + <U>: Open Ease of Access Center <> + <X>: Open Windows Mobility Center <> + <BREAK>: Display the System Properties dialog box <> + <SHIFT+M>: Restore minimized windows to the desktop <> + <TAB>: Cycle through programs on the taskbar <> + <SPACEBAR>: Bring all gadgets to the front and select Windows Sidebar <CTRL> + <> + <F>: Search for computers (if you are on a network) <CTRL> + <> + <TAB>: Use the arrow keys to cycle through programs on the taskbar Note: Depending on your edition of Windows, some shortcuts may not function as described.

Hot Keys

The computer employs hotkeys or key combinations to access most of the computer's controls like screen brightness, volume output and the BIOS utility.

To activate hot keys, press and hold the <Fn> key before pressing the other key in the hotkey combination.



Hotkey	Icon	Function	Description
<Fn> + <F3>		Communication key	Enables / disables the computer's communication devices. (Communication devices may vary by configuration.)
<Fn> + <F4>		Sleep	Puts the computer in Sleep mode.
<Fn> + <F5>		Display toggle	Switches display output between the display screen, external monitor (if connected) and both.
<Fn> + <F6>		Display Off	Turns the display screen backlight off to save power. Press any key to return.
<Fn> + <F7>		Touchpad toggle	Turns the internal touchpad on and off.
<Fn> + <F8>		Speaker toggle	Turns the speakers on and off.
<Fn> + <Δ>		Brightness up	Increases the screen brightness.
<Fn> + <▽>		Brightness down	Decreases the screen brightness.
<Fn> + <Δ>		Volume up	Increases the sound volume.
<Fn> + <▽>		Volume down	Decreases the sound volume.
<Fn> + <Home>		Play/Pause	Play or pause a selected media file.
<Fn> + <Pg Up>		Stop	Stop playing the selected media file.
<Fn> + <Pg Dn>		Previous	Return to the previous media file.
<Fn> + <End>		Next	Jump to the next media file.

Hardware Specifications and Configurations

SKU Configuration

Note, configuration specs not listed in this table are common to all models and are listed following this table.

SKU Configuration					
Model	1ZR9U9R0TN3	1ZR9UAR0TN3	1ZR9UBR0TN2	1ZR9U8R0TN4	1ZR9U8R0TN5
CPU	CPU Intel Core i3 330M PGA 2.13G 35W Arrandale, TJ90, VT, 3M L3	CPU Intel Pentium Dual- Core P6000 1.86G 35W C2 DDR3-1066	CPU Intel Core i7 620M PGA 2.66G 4M	CPU Intel Core i7 620M PGA 2.66G 4M	CPU Intel Pentium Dual- Core P6000 1.86G 35W C2 DDR3-1066
LCD 15.6" Panel	LED LCD AUO 15.6"W WXGA None Glare B156XW03 V2 LF 200nit 8ms 500:1		LED LCD LPL 15.6"W WXGA None Glare LP156WH3- TLM1 LF 200nit 16ms 500:1 (Power saving)	LED LCD AUO 15.6"W WXGA None Glare B156XW03 V2 LF 200nit 8ms 500:1	
System Memory	Memory HYNIX SO-DIMM DDRIII 1066 1GB HMT112S6BFR6 C-G7 N0 LF 64*16 0.055um	Memory HYNIX SO-DIMM DDRIII 1333 1GB HMT112S6TFR8 C-H9 LF 128*8 0.055um	Memory SAMSUNG SO- DIMM DDRIII 1333 2GB M471B5673FH0- CH9 LF 128*8 46nm	Memory SAMSUNG SO- DIMM DDRIII 1333 4GB M471B5273CH0- CH9 LF 256*8 46nm	Memory ELPIDA SO-DIMM DDRIII 1066 1GB EBJ10UE8BDS0 -AE-F LF 128*8 0.065um
Hard Drive 9.5 mm only - SATA	HDD HGST 2.5" 5400rpm 250GB HTS545025B9A 300 Panther B SATA LF	HDD SEAGATE 2.5" 5400rpm 320GB ST9320325AS Wyatt SATA LF	HDD SEAGATE 2.5" 5400rpm 500GB ST9500325AS Wyatt SATA LF	Flash Disk INTEL SSD NAND 160GB SSDSA2MH160 G2C1 MM# 902384 LF	HDD SEAGATE 2.5" 5400rpm 160GB ST9160314AS Wyatt SATA LF
Super-Multi (5.25"/ 12.7mm-H) SATA	ODD SONY Super-Multi DRIVE 12.7mm Tray DL 8X AD- 7585H LF W/O bezel SATA (HF + Windows 7)	ODD HLDS Super-Multi DRIVE 12.7mm Tray DL 8X GT31N (R5-1) LF W/O bezel SATA with Renesas Solution (HF + Windows 7)	ODD PLDS Super-Multi DRIVE 12.7mm Tray DL 8X DS- 8A4SH LF W/O bezel SATA (HF + Windows 7)	ODD HLDS Super-Multi DRIVE 12.7mm Tray DL 8X GT30N LF W/O bezel SATA (HF + Windows 7)	ODD TOSHIBA Super-Multi DRIVE 12.7mm Tray DL 8X TS- L633C LF W/O bezel SATA (HF + Windows 7)
Battery	Battery SIMPLO AS10D Li-Ion 3S2P SAMSUNG 6 cell 6000mAh Main COMMON ID:AS10D7E			Battery SANYO AS10G Li-Ion 3S3P SANYO 9 cell 9000mAh Main COMMON ID:AS10G3E	Battery SIMPLO AS10D Li-Ion 3S2P SAMSUNG 6 cell 6000mAh Main COMMON ID:AS10D7E
AC Adapter	Adapter HIPRO 65W 19V 1.7x5.5x11 Yellow HP- A0652R3B 1LF, LV5 LED LF	Adapter HIPRO 65W 19V 1.7x5.5x11 Blue HP-A0904A3 B1LF, LV5 LED LF	Adapter LITE-ON 90W 19V 1.7x5.5x11 Blue PA-1900-34AR, LV5 LED LF	Adapter HIPRO 90W 19V 1.7x5.5x11 Blue HP-A0904A3 B1LF, LV5 LED LF	Adapter HIPRO 65W 19V 1.7x5.5x11 Yellow HP- A0652R3B 1LF, LV5 LED LF
VRAM	N/A	VRAM SAMSUNG Graphic DDRIII 800 1Gb K4W1G1646E- HC12 LF	VRAM HYNIX Graphic DDRIII 800 1Gb H5TQ1G63BFR- 12C LF	VRAM HYNIX Graphic DDRIII 800 1Gb H5TQ1G63BFR- 12C LF	N/A

SKU Configuration					
VGA chip	N/A	NVIDIA N11MGE1 40nm 29mm*29mm GB1-128 package	NVIDIA N11PGE1 40nm 29mm*29mm GB1-128 package	NVIDIA N11PGE1 40nm 29mm*29mm GB1-128 package	N/A
Wireless Lan Mini Card	Foxconn Wireless LAN Broadcom 4312H BG (HM)		Foxconn Wireless LAN Broadcomm 43225 2x2 BGN (HM) T77H103.00	Foxconn Wirelss LAN Atheros HB97 2x2 BGN (HM)	
Bluetooth	Foxconn Bluetooth BRM 2046 BT3.0 (T60H928.33) f/w:861	Foxconn Bluetooth BRM 2070 (T77H114.01) BT 3.0		Foxconn Bluetooth ATH AR3011 (BT3.0)	
Camera	Chicony 1.3M CH9665SN (CNF9157)	Suyin 1.3M SY9665SN	Liteon 1.3M LT9665AL (09P2SF119)	Suyin 1.3M SY9665SN	Chicony 1.3M CH9665SN (CNF9157)

Processor

Item	Specification
CPU	Intel Mobile Calpella
Graphics	Integrated VGA for Arrandale (UMA mode)
CPU Package	rPGA988A
Power	4M (Arrandale) L3 shared among all cores
On-die Cache	32KB L1 & 256K L2 for each core

Processor Specifications

Item	CPU Speed	Cores	Bus Speed	Cache Size	Package	Core Voltage	Acer P/N
Ci3330M	2.13	2	2.5GT/s	3 MB	PGA988	35W	KC.33001.DMP
Ci3350M	2.26	2		3 MB	PGA988	35W	KC.35001.DMP
Ci5430M	2.26	2		3 MB	PGA988	35W	KC.43001.DMP
Ci5450M	2.40	2		3MB	PGA988	35W	KC.45K01.DMP
Ci5520M	2.24	2		3 MB	PGA988P	35W	KC.52001.DMP
Ci5540M	2.53	2		3 MB	PGA988	35W	KC.54001.DMP
Ci7620M	2.66	2		4 MB	PGA988P	35W	KC.62001.DMP
P6000	1.86	2		3MB	PGA988	35W	KC.60001.DPP

CPU Fan True Value Table (Tj = 100)

CPU Temp (°C)	Fan Speed (rpm)	SPL Spec (dBA)
45	3000	31
55	3250	34
68	3500	37
82	3850	40

- Throttling 50%: On = 100°C ; Off = 93°C
- OS Shutdown: 105°C
- H/W Shutdown: 110°C

CPU Fan True Value Table (Tj = 90)

CPU Temp (°C)	Fan Speed (rpm)	SPL Spec (dBA)
45	3000	31
55	3250	34
68	3500	37
82	3850	40

- Throttling 50%: On = 90°C ; Off = 86°C
- OS Shutdown: 95°C
- H/W Shutdown: 100°C

CPU Fan True Value Table (VGA)

CPU Temp (°C)	Fan Speed (rpm)	SPL Spec (dBA)
45	3000	31
55	3250	34
68	3500	37
82	3850	40

- OS Shut down: 105C
- H/W Shut down : 110C

BIOS

Item	Specification	
BIOS vendor	Phoenix	
BIOS Version	V4.0	
BIOS ROM type	W25X16A	
	Size	2 MB
	Package	8 pins SOIC (208mil)
	Supply current	Active current=5 ma (typical)
	Power down current	1 uA (typical)
ME ROM type	W25Q32	
	Size	4 MB
	Package	8 pins SOIC (208mil)
	Supply current	Active current=5 ma (typical)
	Power down current	1 uA (typical)

System Memory

Item	Specification
Maximum Memory size	16GB (For i7 CPU only)
DIMM socket number	2 (Standard JEDEC 20 4-pin DDR3-SODIMM)
Supports memory size per socket	4GB
Supports DIMM type	DDRIII
Supports DIMM Speed	800 MT/s (PC3-6400) and 1066 MT/s (PC3-8500)
Supports DIMM voltage	1.5V ± 0.075V

Memory Combinations

Slot 1	Slot 2	Total Memory
0MB	1024MB	1024MB
0MB	2048MB	2048MB
0MB	4096MB	4096MB
1024MB	0MB	1024MB
1024MB	1024MB	2048MB
1024MB	2048MB	3072MB
2048MB	0MB	2048MB
2048MB	1024MB	3072MB
2048MB	2048MB	4096MB
2048MB	4096MB	6144MB
4096MB	4096MB	8192MB

NOTE: Above table lists some system memory configurations. You may combine DIMMs with various capacities to form other combinations. On above table, the configuration of slot 1 and slot 2 could be reversed.

LAN Interface

Item	Specification
Manufacturer	Broadcom BCM57760 Giga-LAN solution
Package	68-pin QFN 10mm X 10mm
Features	• Integrated 10/100/1000base-T transceiver • Automatic MDI crossover function • PCIe v1.1 compliant • 10/100/1000BASE-T full-duplex/half-duplex MAC • Receive side scaling(RSS) for multicore processors • Complies with IEEE802.3 , 802.3u , 802.3ab and 802.1p • Supports iSCSI boot • IPv4 and IPv6 large send offload and checksum offload(LSO/TCO) • Wake on LAN(WOL) support meeting the ACPI requirements • Statistics for SNMP MIB II , Ethernet-like MIB and Ethernet • MIB(IEEE 802.3z , Clause 30) • SMBus interface supporting Alert Standard Format(ASF) v2.0 • Self-boot feature , utilizing smaller EEPROM size with ability to use on-chip memory • Serial Flash memory support with auto-sensing capability • PCI Express CLKREQ# support • Integrated switching regulator for improved power consumption

Wireless Module

Item	Specification
Manufacturer	Foxconn Wireless LAN Atheros HB93 minicard b/g/n Foxconn Wireless LAN Broadcom 43225 minicard b/g/n Foxconn Wireless LAN Atheros HB95BG minicard b/g/n Foxconn Wireless LAN Atheros HB97 minicard b/g/n Foxconn Wireless LAN Broadcom 4312H minicard b/g/n Liteon Wireless LAN Atheros HB93 minicard b/g/n Liteon Wireless LAN Atheros HB97 minicard b/g/n

Bluetooth Interface

Item	Specification
Chipset	- Foxconn Bluetooth BRM 2046 BT2.1 (T60H928.33) - Foxconn Bluetooth ATH AR3011 - Foxconn Bluetooth BCM 2070 BT3.0
Radio Technology	FHSS
Operating Frequency	2402 ~ 2480MHz ISM band
Channel Numbers	79 channels with 1MHz BW
Transmitter Output Power	-4~4dBm output power for class2 operation
Receiver Sensitivity	-78dBm @ 0.1% BER(Max)
Maximum Receiver Signal	-10dBm
Operating Voltage	3.3V+/-0.3V
Interface	USB 2.0

Hard Disk Drive Interface

Item	Specification				
Vendor & Model Name	Seagate	HGST	Toshiba	Western Digital	SSD
Capacity (MB)	160, 250, 320, 500	160, 250, 320, 500	160, 250, 320, 500	160, 250, 320, 500, 640	80, 160
Bytes per sector	512				
Data heads	2-4				
Drive Format					
Disks	1-2				
Spindle speed (RPM)	5400				
Performance Specifications					
Buffer size	8 MB				
Interface	SATA				
DC Power Requirements					
Voltage tolerance	5V ±5%	5V ±5%	5V ±5%	5V ±5%	3.3V (1.8") 5V (2.5")

Super-Multi Drive Module

Item	Specification			
Vendor & model name	HLDS GT20N		Sony AD7580S	
Performance Specification	With CD Diskette	With DVD Diskette	With CD Diskette	With DVD Diskette
Transfer rate (MB/sec)	Sustained: 3,600 KB/s (24x) max.	Sustained: 11.08 Mbytes/s (8x) max.	Sustained: 1,571 (typical)	Sustained: 10,993 (typical)
Buffer Memory	2 MB			
Interface	SATA			
Applicable disc formats	DVD-ROM: 4.7GB (Single Layer) 8.5GB (Dual Layer) DVD-R: 3.95GB (Ver. 1.0: read only) 4.7GB (Ver. 2.0 for Authoring: read only) 4.7GB (Ver. 2.1 for General: read & write) (DL) 8.5GB (Ver. 3.0) DVD-RW: 4.7GB (Ver. 1.2/ Rev 1.0, 2.0, 3.0) DVD-RAM: 1.46GB/side, 4.7GB/side (Ver. 2.2) DVD+R: 4.7GB (Ver. 1.3) (DL) 8.5GB (Ver. 1.1) DVD+RW: 4.7GB (Vol.1 Ver.1.3) CD-ROM Mode-1 data disc CD-ROM Mode-2 data disc CD-ROM XA, CD-I, Photo-CD Multi-Session, Video CD CD-Audio Disc Mixed mode CD-ROM disc (data and audio) CD-Extra CD-Text CD-R (Conforming to “Orange Book Part 2”: read & write) CD-RW (Conforming to “Orange Book Part 3”: read & write)		DVD Read: DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-Video, DVD-Audio, SACD (Hybrid), UDF DVD, DVD-R, DVD-R DL, DVD-R 3.95 GB, DVD-R Authoring, DVD-R Multi-Border, DVD-RW, DVD+R, DVD+R DL, DVD+R Multi-Session, DVD+RW, DVD-RAM V1.0, DVD-RAM V2.0 & 2.1 & 2.2. CD Read: CD-DA, CD-ROM Mode-1, CD-ROM/XA Mode-2 Form-1 and Mode-2 Form-2, CD-i, CD-i Bridge, Video-CD (MPEG-1), Karaoke CD, Photo-CD, Enhanced CD, CD Plus, CD Extra, itrax CD, CD-Text, UDF CD, CD-R, and CD-RW DVD Write: DVD Data & Video CD Read: CD-DA, CD-ROM Mode-1, CD-ROM/XA Mode-2 Form-1 and Mode-2 Form-2, CD-i, Video-CD, CD-Text	
Loading mechanism	Drawer (Solenoid Open) Tact SW (Open) Emergency Release (draw open hole)			
Power Requirement				
Input Voltage	DC 5 V +/- 5%			

Video Interface(UMA)

Item	Specification
Chipset	Arrandale CPU with HM55 PCH
Features	• The integrated graphics controller contains a refresh of the 5th generation graphics core. • IntelR Dynamic Video Memory Technology support • IntelR Smart 2D Display Technology (IntelR S2DDT) • IntelR Clear Video Technology • MPEG2 Hardware Acceleration • WMV9/VC1 Hardware Acceleration • AVC Hardware Acceleration • ProcAmp • Advanced Pixel Adaptive De-interlacing • Sharpness Enhancement • De-noise Filter • High Quality Scaling • Film Mode Detection (3:2 pull -down) and Correction • IntelR TV Wizard • Microsoft DirectX*11 support • Analog CRT DAC Interface Support (300MHz DAC/up to QXGA/Hot - Plug) • Dual-Channel LVDS interface support 2x24 bpp panels

Video Interface(SG)

Item	Specification
Chipset	Nvidia N11PGE1/N11MGE1
Package	969-pins FCBGA 29mm x 29mm
Features	• N11P/ N11M are designed for both the performance mainstream and gaming notebook PC segment which provides the most advanced and best-in-class graphics performance. • They support MicrosoftR DirectX 11 with shader Model 5.0, PCI ExpressR Revision 2.0, VESA DisplayPort. technologies, and integrated HDMI.. The Unified Video Decoder (UVD) enables support for dual-stream decode of High Definition (HD) and Standard Definition (SD) content (H.264, VC -1, or MPEG-2 formats). In addition, support 7.1 channels of compressed HD Audio with Digital Rights Management (DRM). • Fully compliant with PCI Express Base Specification Rev. 2.1 • Support CRT/LVDS/HDMI/DP interface (concurrent) • Dual-channel LVDS interface support: single channel 24 bpp dual link • HDCP compliance embed-in • Full POWERPLAYTM 8.0 support • LVDS / Engine and Memory / DP Spread Spectrum Support • H.264 implementation is based on the ISO/IEC 14496-10 specification. • VC-1 implementation is based on the SMPTE 421M specification. • MPEG2 implementation is based on the ISO 13818 -2 • Supports top quality DVD and Blue -Ray disc with the lowest CPU usage.

VRAM

Item	Specification
Chipset	Nvidia N11PGE1/N11MGE1
Memory size	1GB(N11PGE1)/512KB(N11MGE1)
Interface	DDRIII (800MHz)

USB Port

Item	Specification
Chipset	Intel Ibex-Peak (HM55)
USB compliance level	2.0
EHCI	2 EHCI host controllers and 2 RMH
Number of USB port(s)	4
Location	3 Rightside,1 Leftside
Serial port function control	N/A

System Board Major Chips

Item	Specification
Core logic	Intel® Ibex-Peak (HM55)
VGA	Nvidia N11PGE1/N11MGE1
LAN	Broadcom BCM57760
USB	Intel Ibex-Peak (HM55)
Super I/O	N/A
Modem	CX20672-11Z
Bluetooth	BRM 2046 BT2.1, ATH AR3011, BCM 2070 BT3.0
Wireless	Foxconn Wireless LAN Atheros HB93 Foxconn Wireless LAN Broadcomm 43225 Foxconn Wirelss LAN Atheros HB95BG Foxconn Wireless LAN Atheros HB97 Foxconn Wireless LAN Broadcom 4312H Liteon Wireless LAN Atheris HB93 Liteon Wireless LAN Atheris HB97
PCMCIA	N/A
Audio codec	CX20672-11Z
Card reader	Intel Ibex-Peak (HM55)

Keyboard

Item	Specification
Controller	NPCE781
Total number of keypads	105-/106-/109-key Acer FineTouch keyboard
Windows logo key	
Hotkeys	See "Hot Keys" on page 16.

I/O Ports

Item	Specification
I/O Support	• Acer EasyPort IV connector • Acer Bio-Protection fingerprint reader • Multi-in-1 card reader (SD™, MMC, MS, MS PRO, xD) • Four USB 2.0 ports • External display (VGA) port • Headphone/speaker/line-out jack • Microphone-in jack • Ethernet (RJ-45) port • Modem (RJ-11) port • DC-in jack for AC adapter

Battery

Item	Specification
	6 cell
Nominal Capacity	4400 mAh
Discharging Loading	48W (Max)
Output Voltage	12.5V~8.0V (end voltage)
Charging Voltage	12.6V +/- 0.09V

LCD

Item	Specification
Vendor/model name	AUO/LPL/Samsung
Screen Diagonal (mm)	394.9
Display resolution (pixels)	1366 x 768 WXGA Clare
Pixel Pitch	0.252X0.252
Display Mode	Normally White
Typical White Luminance (cd/m ²) (also called Brightness)	200 typ. (5 points average) 170 min. (5 points average)
Contrast Ratio	500 typical
Response Time (Optical Rise Time/Fall Time) msec	8 typ. / 16 Max
Luminance Uniformity	1.25 max. (5 points)
Electrical Interface	1 channel LVDS
Support Color	262K colors (RGB 6-bit)
Viewing Angle (up/down/right/ left)	15/35/45/45
Temperature Range (°C) Operating Storage (shipping)	0 to +50 -20 to +60

LCD Display Supported Resolution

Resolution	24 bits	30 bits	36 bits	48 bits
640x480p/60Hz 4:3	Yes	Yes	Yes	Yes
720x480p/60Hz 4:3	Yes	Yes	Yes	Yes
720x480p/60Hz 16:9	Yes	Yes	Yes	Yes
1280x720p/60Hz 16:9	Yes	Yes	Yes	Yes
1920x1080i/60Hz 16:9	Yes	Yes	Yes	Yes
1440x480i/60Hz 4:3	Yes	Yes	Yes	Yes
1440x480i/60Hz 16:9	Yes	Yes	Yes	Yes
1920x1080p/60Hz 16:9	Yes	Yes	Yes	Yes
720x576p/50Hz 4:3	Yes	Yes	Yes	Yes
720x576p/50Hz 16:9	Yes	Yes	Yes	Yes
1280x720p/50Hz 16:9	Yes	Yes	Yes	Yes
1920x1080i/50Hz 16:9	Yes	Yes	Yes	Yes
1440x576i/50Hz 4:3	Yes	Yes	Yes	Yes
1440x576i/50Hz 16:9	Yes	Yes	Yes	Yes
1920x1080p/50Hz 16:9	Yes	Yes	Yes	Yes

Camera

Item	Specifications		
Vendor and model	Suyin(SY9665SN)	Chicony(CH9665SN)	Lite-on(LT9665AL)
Type	1.3M camera		
Interface	USB 2.0		
Focusing range	29.16cm	26.8cm	29.16cm
Dimensions (L x W x H mm)	65x8.0x3.79mm	65x8x3.8mm	65x8.0x3.76mm
Sensor type	CMOS, OV9665		
Pixel resolution	1280x1024		
Pixel size	21.25m x 21.25m		
Image size	Maximum 1.3M, but preview is VGA		

AC Adapter

Item	Specification
Input rating	100 Vac to 240 Vac
Maximum input AC current	100 Vac, 240 Vac / 3.42A load 1.5A
Inrush current	240 Vac; (Cold Start) No damage
Efficiency	100 Vac / 120W load 85% 240 Vac / 120W load 85%

System Power Management

Item	S5_ON	SUSON	MAINON
Initial	0	0	0
On (S0)	1	1	1
Standby (S1)	1	1	1
Suspend (S3)	1	1	0
Hibernate (S4)	1	0	0
Soft Off (S5)	1	0	0

Card Reader

Item	Specification
Chipset	Intel Ibex-Peak (HM55)
Package	LQFP
Features	- Fully compatible with USB2.0 High Speed and backward compatible with USB1.1 specifications - Supports multiple flash card interfaces, including SD/MMC/xD/MS. - Supports single LUN - Supports both Windows and Mac OS - Default Mass Storage Class driver comes from Windows ME/2000/XP/Vista/Windows 7 and Mac OS X - Windows 98 is supported by vendor driver from Alcor 48-pin LQFP lead-free/Halogen-free/RoHS compliant package is available.

System LED Indicator

Item	Specification
Battery Charging state	Blue : Full charging Amber : Battery charging
Power/Suspend state	Blue : On Amber : Suspend No light : Off
Wifi status	Amber : Wifi On
3G status	Blue : 3G on
Caps Lock	Blue
Nums Lock	Blue
HDD	Blue

Trusted Platform Module (TPM)

Item	Specification
Version	1.2
Hardware controller	Infineon SLB9635

Power Specification

Item	Specification					
	Initial	On	Stand by	Suspend	Hibernate	Soft Off
Initial		1				
ON (S0)			2	3	4	5
Standby (S1)		6				
Suspend (S3)		7				
Hibernate (S4)		8				
Soft Off (S5)		9				

Mechanical off is a condition where all power except the RTC battery has been removed from the system.

1. Initial to On state: When the AC adapter or Battery pack has been plugged into the system, the WPCE781 will be reset and initial all output pins then the system goes into Initial state and waiting for power on event. If the power button is pressed then the system will go into the ON state.
2. ON to Standby state: The system will go into the Standby state when PCH receives the Standby command.
3. ON to Suspend state: The system will go into Suspend state when PCH receives the Suspend command.
4. ON to Hibernate state: The system will go into Hibernate state when PCH receives the Hibernat command.
5. ON to Soft Off state: The system will go into Soft Off state when PCH receives the Soft off command.
6. Standby to ON state: The system will go into ON state when the system receives any wake up events, for example, keyboard and mouse.
7. Suspend to ON state: The system will go into ON state when the power button is pressed.
8. Hibernate to ON state: The system will go into ON state when the power button is pressed.
9. Soft Off to ON state: The system will go into ON state when the power button is pressed.

System Utilities

BIOS Setup Utility

The BIOS Setup Utility is a hardware configuration program built into your computer's BIOS (Basic Input/Output System).

Your computer is already properly configured and optimized, and you do not need to run this utility. However, if you encounter configuration problems, you may need to run Setup. Please also refer to Chapter 4 Troubleshooting when problem arises.

To activate the BIOS Utility, press **F2** during POST (when "Press <F2> to enter Setup" message is prompted on the bottom of screen).

The default parameter of F12 Boot Menu is set to "disabled". If you want to change boot device without entering BIOS Setup Utility, please set the parameter to "enabled".

Press <F12> during POST to enter multi-boot menu. In this menu, user can change boot device without entering BIOS SETUP Utility.

Navigating the BIOS Utility

There are five menu options: Information, Main, Security, Boot, and Exit.

Follow these instructions:


- To choose a menu, use the left and right arrow keys.
- To choose an item, use the up and down arrow keys.
- To change the value of a parameter, press **F5** or **F6**.
- Press **Esc** while you are in any of the menu options to go to the Exit menu.
- In any menu, you can load default settings by pressing **F9**. You can also press **F10** to save any changes made and exit the BIOS Setup Utility.

NOTE: You can change the value of a parameter if it is enclosed in square brackets. Navigation keys for a particular menu are shown on the bottom of the screen. Help for parameters are found in the Item Specific Help part of the screen. Read this carefully when making changes to parameter values. **Please note that system information varies with different models.**

BIOS

Information

The Information screen displays a summary of your computer hardware information.

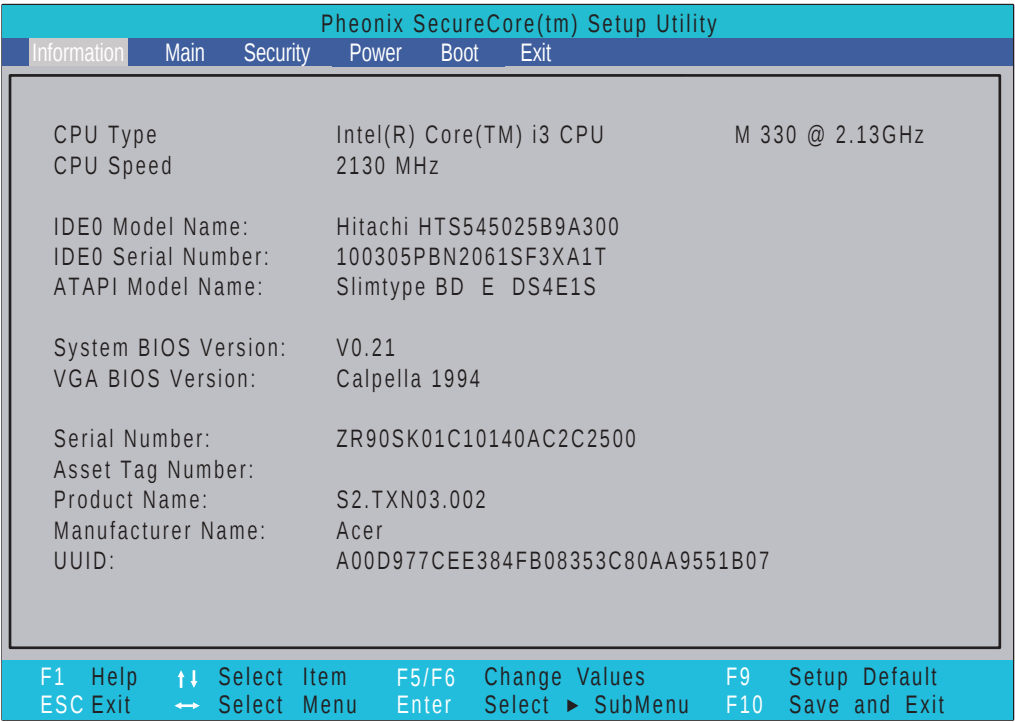

NOTE: The screen above is for your reference only. Actual values may differ according to model.

The table below describes the parameters in this screen.

Parameter	Description
CPU Type	This field shows the CPU type and speed of the system.
CPU Speed	This field shows the speed of the CPU.
IDE0 Model Name	This field shows the model name of IDE0 model name in the system.
IDE0 Serial Number	This field displays the serial number of IDE0 model name in the system.
ATAPI Model Name	This field shows the model name of the Optical device installed in the system.
System BIOS Version	Displays system BIOS version.
VGA BIOS Version	This field displays the VGA firmware version of the system.
Serial Number	This field displays the serial number of this unit.
Asset Tag Number	This field displays the asset tag number of the system.
Product Name	This field shows product name of the system.
Manufacturer Name	This field displays the manufacturer of this system.
UUID	Universally Unique Identifier (UUID) is an identifier standard used in software construction, standardized by the Open Software Foundation (OSF) as part of the Distributed Computing Environment (DCE).

Main

The Main screen allows the user to set the system time and date as well as enable and disable boot option and recovery.

Phoenix SecureCore(tm) Setup Utility		
Information	Main	Security Power Boot Exit
System Time: [14:18:01] System Date: [05/04/2010] Total Memory: 1024 MB DUMT Pre-Allocated: 64 MB Quiet Boot [Enabled] Network Boot [Enabled] F12 Boot Menu [Disabled] D2D Recovery [Enabled] SATA Mode [AHCI]		Item Specific Help <Tab>, <Shift-Tab>, or <Enter> selects field.
F1 Help ↑↓ Select Item F5/F6 Change Values F9 Setup Default ESC Exit ← Select Menu Enter Select ► SubMenu F10 Save and Exit		


NOTE: The screen above is for your reference only. Actual values may differ.

The table below describes the parameters in this screen.

Parameter	Description	Format/Option
System Time	Sets the system time. The hours are displayed with 24-hour format.	Format: HH:MM:SS (hour:minute:second)
System Date	Sets the system date.	Format MM/DD/YYYY (month/day/year)
Total Memory	Displays the total memory available.	N/A
DUMT Pre-Allocated	Displays the available memory for DUMT.	N/A
Quiet Boot	When Quiet Boot is enabled, the notebook displays an illustration called the OEM screen during system boot instead of the traditional POST screen that displays the normal diagnostic messages.	Option: Enabled or Disabled
Network Boot	Enables, disables the system boot from LAN (remote server).	Option: Enabled or Disabled
F12 Boot Menu	Enables, disables Boot Menu during POST.	Option: Disabled or Enabled
D2D Recovery	Enables, disables D2D Recovery function. The function allows the user to create a hidden partition on hard disc drive to store operation system and restore the system to factory defaults.	Option: Enabled or Disabled
SATA Mode	Control the mode in which the SATA controller should operate.	Option: AHCI or IDE

Security

The Security screen contains parameters that help safeguard and protect your computer from unauthorized use.

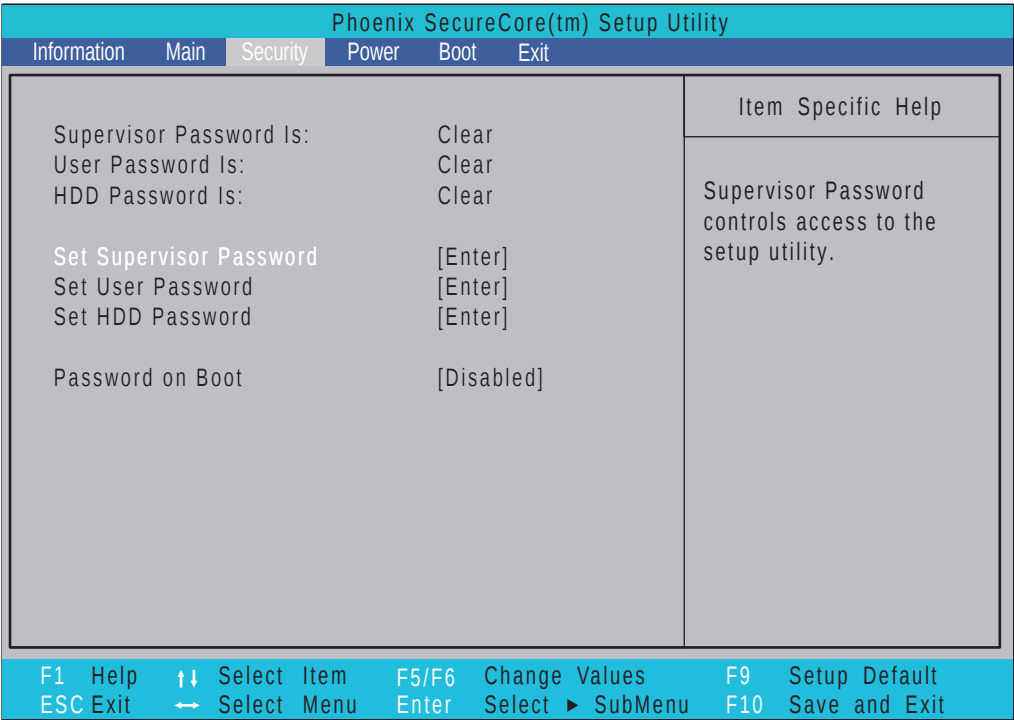

The table below describes the parameters in this screen. Settings in **boldface** are the default and suggested parameter settings.

Parameter	Description	Option
Supervisor Password Is	Shows the setting of the Supervisor password	Clear or Set
User Password Is	Shows the setting of the user password.	Clear or Set
HDD Password Is	Shows the setting of the IDE0 password.	Clear or Set
Set Supervisor Password	Press Enter to set the supervisor password. When set, this password protects the BIOS Setup Utility from unauthorized access. The user can not either enter the Setup menu nor change the value of parameters.	N/A
Set User Password	Press Enter to set the user password. When user password is set, this password protects the BIOS Setup Utility from unauthorized access. The user can enter Setup menu only and does not have right to change the value of parameters.	N/A
Set HDD Password	Enter HDD Password.	N/A
Password on Boot	Defines whether a password is required or not while the events defined in this group happened. The following sub-options are all requires the Supervisor password for changes and should be grayed out if the user password was used to enter setup.	Disabled or Enabled

NOTE: When you are prompted to enter a password, you have three tries before the system halts. Don't forget your password. If you forget your password, you may have to return your notebook computer to your dealer to reset it.

Setting a Password

Follow these steps as you set the user or the supervisor password:

1. Use the ↑ and ↓ keys to highlight the Set Supervisor Password parameter and press the **Enter** key. The Set Supervisor Password box appears:

Set Supervisor Password	
Enter New Password	[]
Confirm New Password	[]

2. Type a password in the “Enter New Password” field. The password length can not exceed 8 alphanumeric characters (A-Z, a-z, 0-9, not case sensitive). Retype the password in the “Confirm New Password” field.

IMPORTANT: Be very careful when typing your password because the characters do not appear on the screen.

3. Press **Enter**. After setting the password, the computer sets the User Password parameter to “Set”.
4. If desired, you can opt to enable the Password on boot parameter.
5. When you are done, press F10 to save the changes and exit the BIOS Setup Utility.

Removing a Password

Follow these steps:

1. Use the ↑ and ↓ keys to highlight the Set Supervisor Password parameter and press the **Enter** key. The Set Password box appears:

Set Supervisor Password	
Enter Current Password	[]
Enter New Password	[]
Confirm New Password	[]

2. Type the current password in the Enter Current Password field and press **Enter**.
3. Press **Enter** twice **without** typing anything in the Enter New Password and Confirm New Password fields. The computer then sets the Supervisor Password parameter to “Clear”.
4. When you have changed the settings, press u to save the changes and exit the BIOS Setup Utility.

Changing a Password

- 1. Use the ↑ and ↓ keys to highlight the Set Supervisor Password parameter and press the **Enter** key. The Set Password box appears.

Set Supervisor Password	
Enter Current Password	[]
Enter New Password	[]
Confirm New Password	[]

- 2. Type the current password in the Enter Current Password field and press **Enter**.
- 3. Type a password in the Enter New Password field. Retype the password in the Confirm New Password field.
- 4. Press **Enter**. After setting the password, the computer sets the User Password parameter to “Set”.
- 5. If desired, you can enable the Password on boot parameter.
- 6. When you are done, press F10 to save the changes and exit the BIOS Setup Utility.

If the verification is OK, the screen will display as following.

Setup Notice
Changes have been saved.
Continue

The password setting is complete after the user presses **Enter**.

If the current password entered does not match the actual current password, the screen will show you the Setup Warning.

Setup Warning
Invalid Password.
Continue


If the new password and confirm new password strings do not match, the screen will display the following message.

Setup Warning
Passwords do not match. Re-enter password.
Continue

Boot


This menu allows the user to decide the order of boot devices to load the operating system. Bootable devices includes the USB diskette drives, the onboard hard disk drive and the DVD drive in the module bay.

Select Boot Devices to select specific devices to support boot.

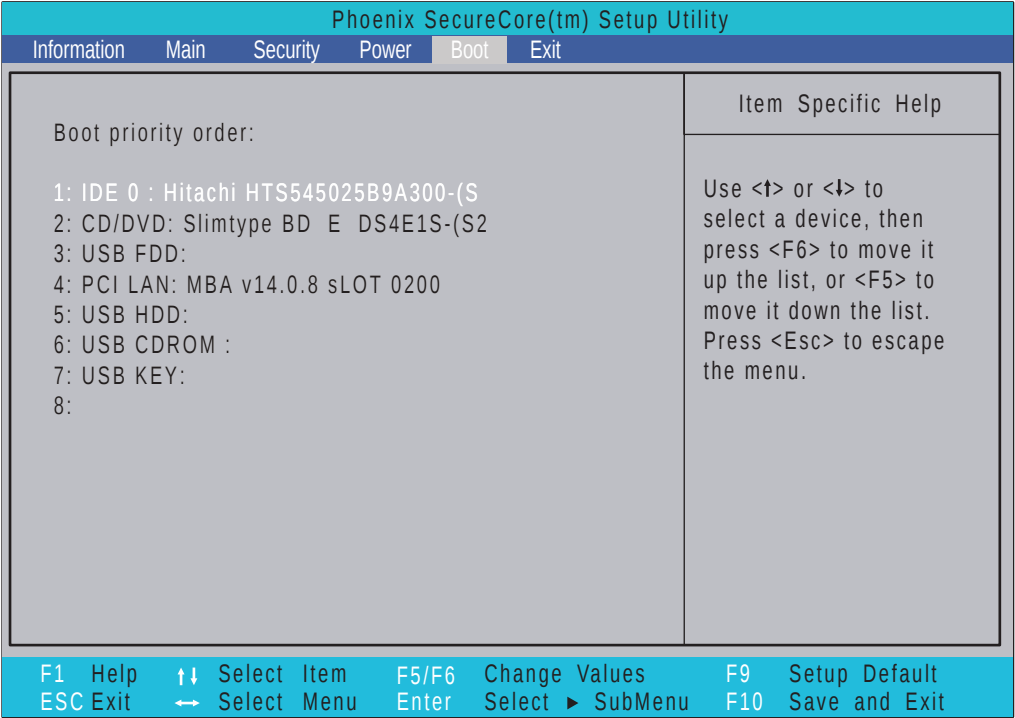

Exit

The Exit screen allows you to save or discard any changes you made and quit the BIOS Utility.

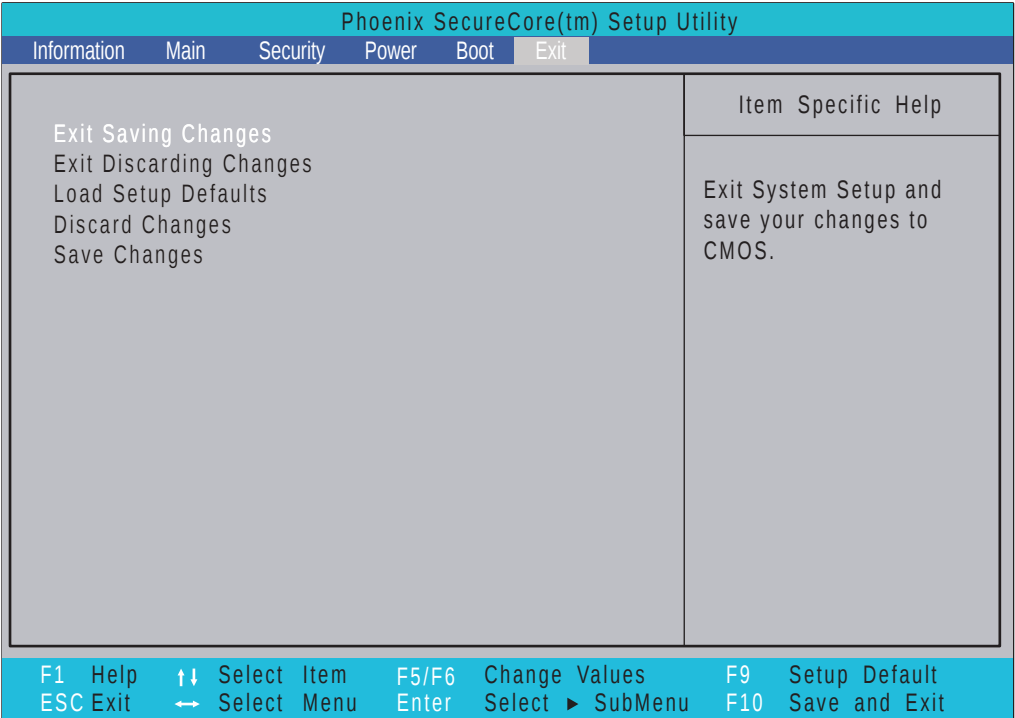

The table below describes the parameters in this screen.

Parameter	Description
Exit Saving Changes	Exit System Setup and save your changes to CMOS.
Exit Discarding Changes	Exit utility without saving setup data to CMOS.
Load Setup Default	Load default values for all SETUP item.
Discard Changes	Load previous values from CMOS for all SETUP items.
Save Changes	Save Setup Data to CMOS.

BIOS Flash Utilities

The BIOS flash memory update is required for the following conditions:

- New versions of system programs
- New features or options
- Restore a BIOS when it becomes corrupted.

Use the Flash utility to update the system BIOS flash ROM.

NOTE: If you do not have a crisis recovery diskette at hand, then you should create a **Crisis Recovery Diskette** before you use the Flash utility.

NOTE: Do not install memory-related drivers (XMS, EMS, DPMI) when you use the Flash.

NOTE: Please use the AC adaptor power supply when you run the Flash utility. If the battery pack does not contain enough power to finish BIOS flash, you may not boot the system because the BIOS is not completely loaded.


Follow the steps below to run the Flash.

1. Prepare a bootable diskette.
2. Copy the flash utilities to the bootable diskette.
3. Then boot the system from the bootable diskette. The flash utility has auto-execution function.


DOS Flash Utility

Perform the following steps to use the DOS Flash Utility:

- 1. Press F2 during boot to enter the Setup Menu.
- 2. Select **Boot Menu** to modify the boot priority order, for example, if using USB HDD to Update BIOS, move USB HDD to position 1.

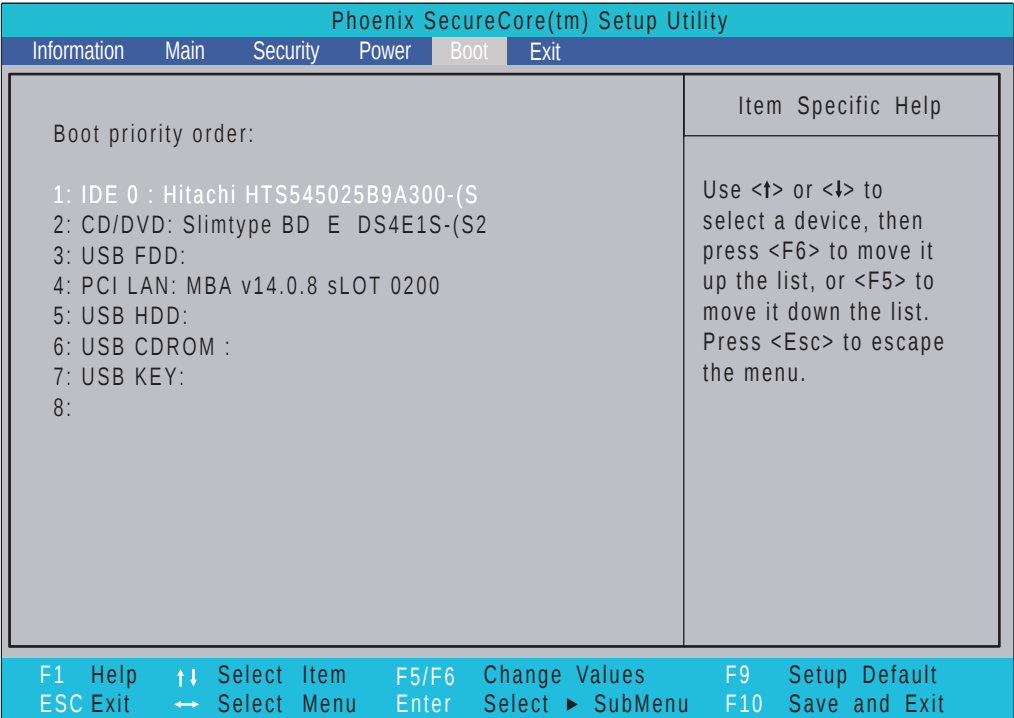

- 3. Execute the **BIOS.BAT** batch file to update BIOS.
The flash process begins as shown.
- 4. In flash BIOS, the message **Please do not remove AC Power Source** displays.
NOTE: If the AC power is not connected, the following message displays.




Plug in the AC power to continue.

- 5. Flash is complete when the message Flash programming complete displays.

WinFlash Utility

Perform the following steps to use the WinFlash Utility:

1. Double-click the WinFlash executable.
2. Click **OK** to begin the update. A progress screen displays.

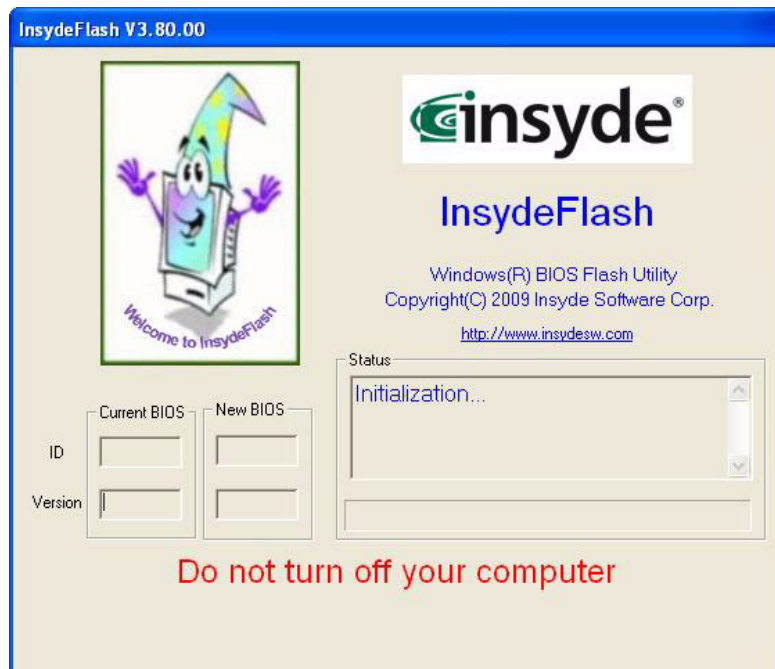


Remove HDD/BIOS Password Utilities

This section provides you with details about removing HDD/BIOS password:

Remove HDD Password:

If you key in the wrong HDD password three times, an error is generated.

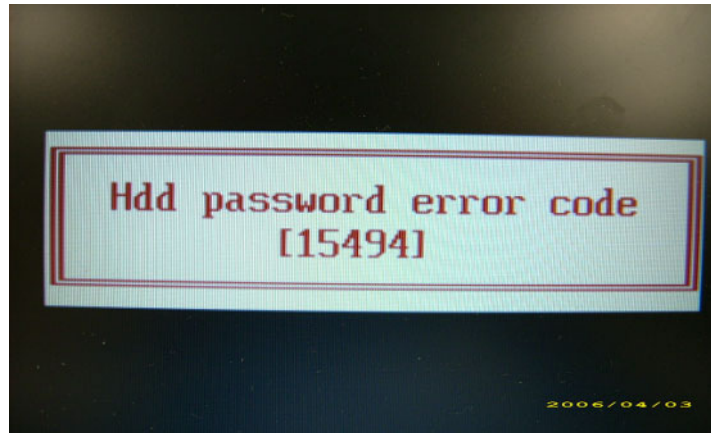

To reset the HDD password, perform the following steps:

1. On another computer, run HDD_PW.exe.
2. Enter "hdd_pw 15494 0"
3. Chose one (1) of the generated passwords.

```
C:\WINDOWS\system32\cmd.exe
F:\>cd password
F:\password>dir/w
Volume in drive F has no label.
Volume Serial Number is D4F6-0236

Directory of F:\password

[.]          [..]      BIOS_PW.EXE  HDD_PW.EXE
 2 File(s)    35,354 bytes
 2 Dir(s)    487,895,040 bytes free

F:\password>hdd_pw 15494 0
unlock6.exe v1.1 2 May 2003


Choice what kind of the password to be generated:
0.) Exit....
1.) Scan Code
2.) Upper case ASCII Code
3.) Lower case ASCII Code
Enter your choice: 2
0KJFN42
UUEIQ96
F:\password>
```

4. Reboot the locked computer and key in one of the passwords from number 3 above.



Removing BIOS Passwords


If you key in the wrong HDD password three times, an error is generated.

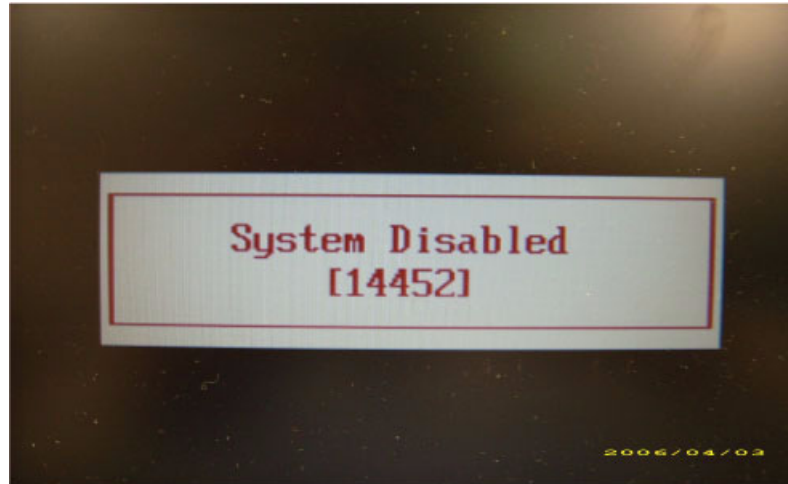


To clean the User or Supervisor passwords, perform the following steps:

To reset the BIOS password, perform the following steps:

1. On another computer, run BIOS_PW.exe.
2. Enter "bios_pw 14452 0"
3. Chose one (1) of the generated passwords.

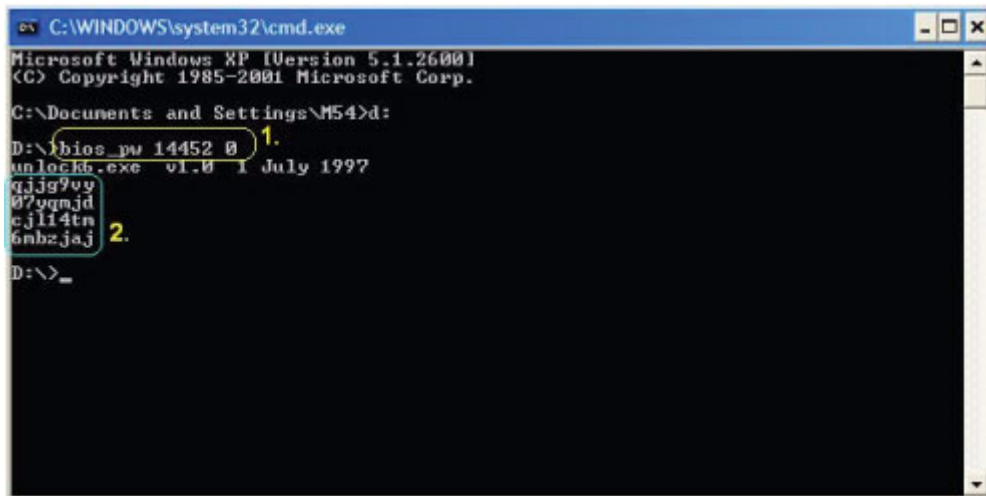

4. Reboot the locked computer and key in one of the passwords from number 3 above.

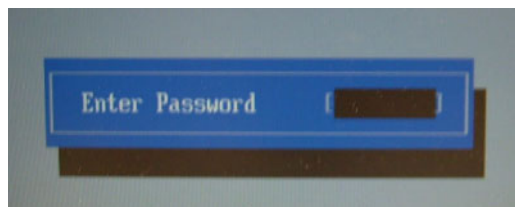

Using Boot Sequence Selector

The Boot Sequence Selector allows the boot order to be changed without accessing the BIOS. To use Boot Sequence Selector, perform the following steps:

1. Enter into DOS.
2. Execute **BS.exe** to display the usage screen.



```
d:\BOOTSEQ>bs

*** Boot Sequence Selector Version 0.03 ***
Create by Rockwell Chuang 10/01/2005.

Usage:
      BS [ 1 | 2 | 3 | 4 ]

BS 1 : [ Floppy ] => [ HardDisk ] => [ CD-ROM ] => [ LAN ]
BS 2 : [ HardDisk ] => [ CD-ROM ] => [ LAN ] => [ Floppy ]
BS 3 : [ CD-ROM ] => [ HardDisk ] => [ LAN ] => [ Floppy ]
BS 4 : [ LAN ] => [ Floppy ] => [ HardDisk ] => [ CD-ROM ]

d:\BOOTSEQ>
```

3. Select the desired boot sequence by entering the corresponding sequence. For example, enter **BS2** to change the boot sequence to HDD | CD ROM | LAN | Floppy.


Using DMITools

The DMI (Desktop Management Interface) Tool copies BIOS information to EEPROM to be used in the DMI pool for hardware management.

When the BIOS displays **Verifying DMI pool data** it is checking that the table correlates with the hardware before sending to the operating system (Windows, etc.).

To update the DMI Pool, perform the following steps:

1. Copy the file **qdm130a.exe** to a bootable USB flash disk.
2. Enter into DOS.
3. Enter **qdm130a** then click enter to display the usage screen.

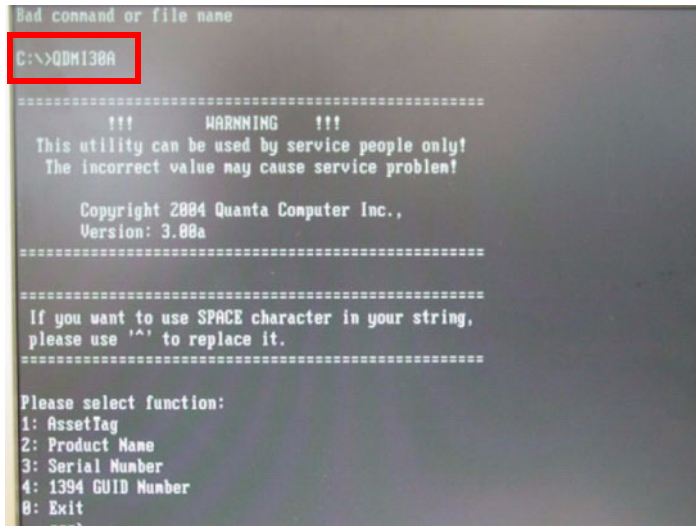

```
Bad command or file name
C:\>qdm130a


=====
!!!      WARNING      !!!
This utility can be used by service people only!
The incorrect value may cause service problem!

Copyright 2004 Quanta Computer Inc.,
Version: 3.00a
=====

If you want to use SPACE character in your string,
please use '^' to replace it.
=====

Please select function:
1: Asset Tag
2: Product Name
3: Serial Number
4: 1394 GUID Number
0: Exit
>
```

4. Enter the number of the function you want to modify (1. Asset Tag, 2. Product Name, 3. Serial Number, 4. 1394 GUID Number, or 0 to exit the program).
5. After the modifications have been made, execute "VEEPROM" to write the data to EEPROM.

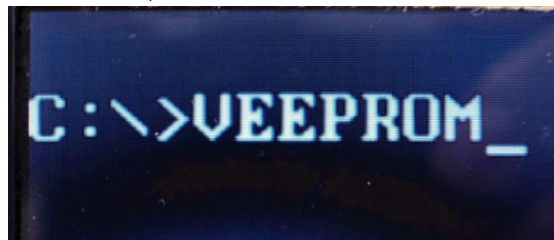

Using the LAN MAC EEPROM Utility

You can use the MAC.BAT utility to write the MAC.CFG file to the EEPROM in DOS mode.


1. Use a text editor to open the MAC.CFG file. You can see the MAC.CFG contents as shown:



```
MAC.CFG - 記事本
檔案(F) 編輯(E) 格式(O) 檢視(V) 說明(H)
Title= MAC Address byte
WriteData='001122334455'
StartAddr=7A
WriteLeng=6
KeepByte=0
```

WriteData = '001122334455'	MAC value
StartAddr=7A	MAC address
WriteLeng=6	MAC value length
KeepByte=0	don't care

2. In DOS mode, run the **MAC.BAT** file to write MAC values to eeprom.

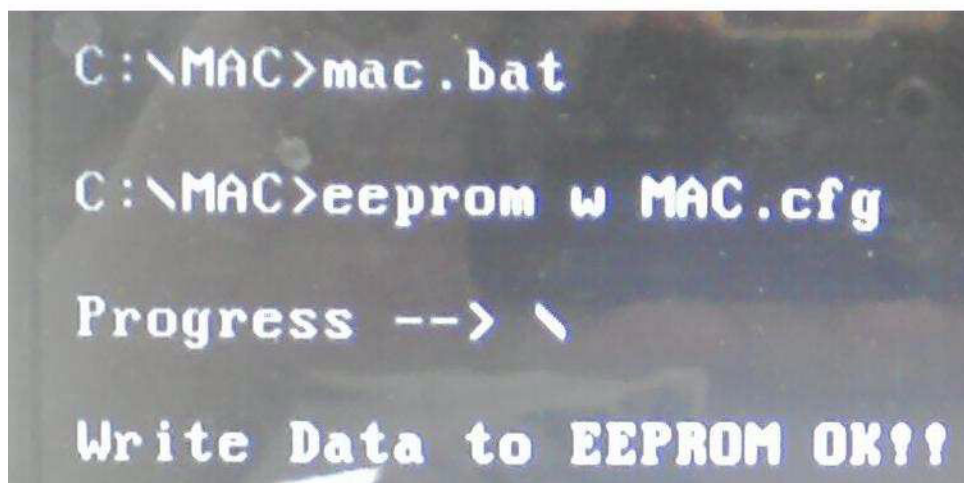

Machine Disassembly and Replacement

IMPORTANT: The outside housing and color may vary from the mass produced model.

This chapter contains step-by-step procedures on how to disassemble the notebook computer for maintenance and troubleshooting.

Disassembly Requirements

To disassemble the computer, you need the following tools:

- Wrist grounding strap and conductive mat for preventing electrostatic discharge
- Flat screwdriver
- Philips screwdriver
- Plastic flat screwdriver
- Plastic tweezers

NOTE: The screws for the different components vary in size. During the disassembly process, group the screws with the corresponding components to avoid mismatch when putting back the components.

General Information

Pre-disassembly Instructions

Before proceeding with the disassembly procedure, make sure that you do the following:

- 1. Turn off the power to the system and all peripherals.
- 2. Unplug the AC adapter and all power and signal cables from the system.



- 3. Place the system on a flat, stable surface.

Disassembly Process

The disassembly process is divided into the following stages:

- External module disassembly
- Main unit disassembly
- LCD module disassembly

The flowcharts provided in the succeeding disassembly sections illustrate the entire disassembly sequence. Observe the order of the sequence to avoid damage to any of the hardware components. For example, if you want to remove the mainboard, you must first remove the keyboard, then disassemble the inside assembly frame in that order.

Main Screw List


Screw	Quantity	Part Number
M2.5*3	3	86.TPK07.003
M2.5*3 Ni	2	86.PSR07.002
M2.0*3	21	86.ARE07.002
M2.5*5	30	86.ARE07.003
M2.5*4	5	86.PTN07.004

External Module Disassembly Process

IMPORTANT:The outside housing and color may vary from the mass produced model.

External Modules Disassembly Flowchart

The flowchart below gives you a graphic representation on the entire disassembly sequence and instructs you on the components that need to be removed during servicing. For example, if you want to remove the main board, you must first remove the keyboard, then disassemble the inside assembly frame in that order.

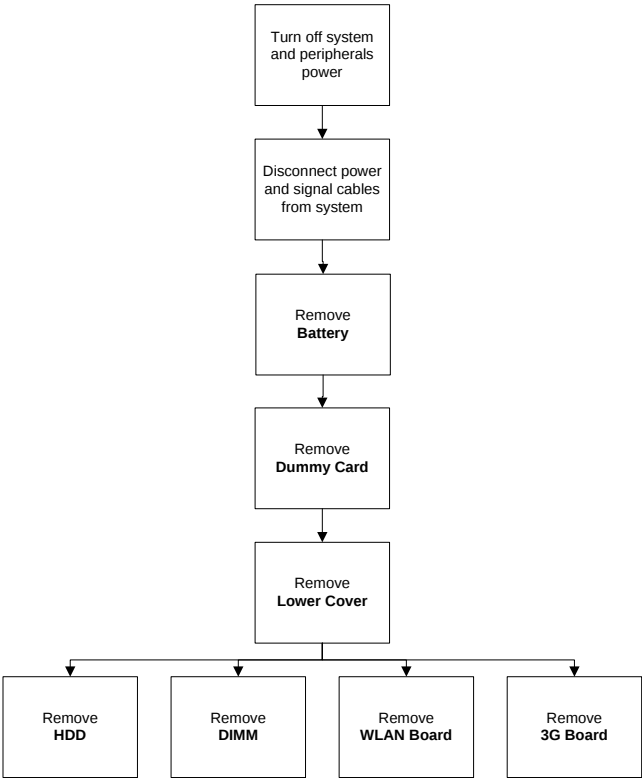


Screw List


Step	Screw	Quantity	Part No.
Lower Cover Disassembly	M2.5*5	1	86.TPK07.003
HDD Disassembly	M2.0*3	1	86.ARE07.002
HDD Carrier Disassembly	M2.5*3 Ni	2	86.TPK07.003
WLAN Disassembly	M2.0*3	2	86.ARE07.002
3G Disassembly	M2.0*3	1	86.ARE07.002
ODD Disassembly	M2.5*3	1	86.TPK07.003
ODD Bracket Disassembly	M2.0*3	2	86.ARE07.002

Removing the Battery Pack

1. Turn the computer over. Slide the battery lock in the direction shown.

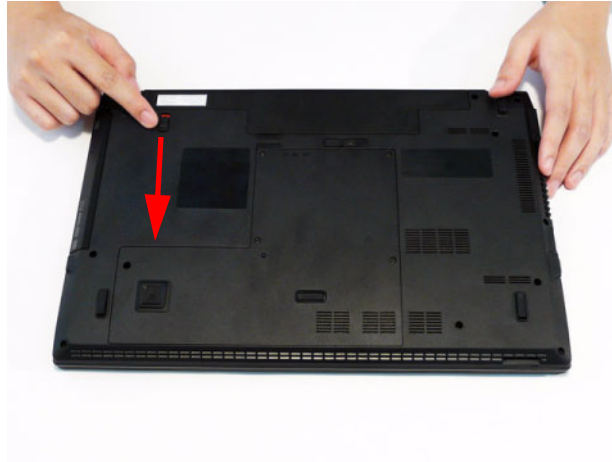

2. Slide and hold the battery release latch to the release position (1), then lift out the battery pack from the main unit (2).

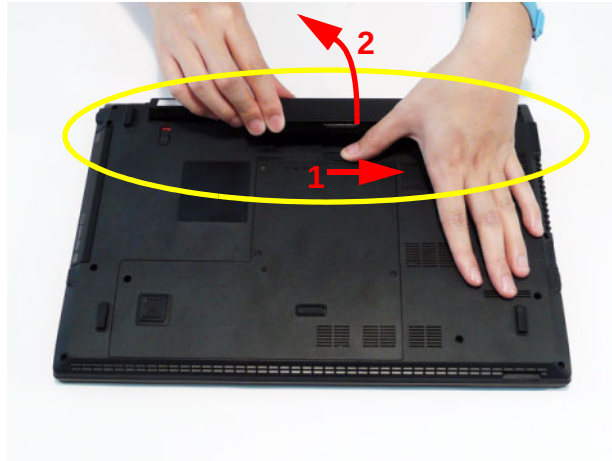

Please detach the battery and follow local regulations for disposal.

Removing the SD dummy card

1. Push the SD dummy card all the way in to eject it.




2. Pull it out from the slot.




Removing the Lower Cover

- 1. See "Removing the Battery Pack" on page 48.
- 2. Loosen the four (4) captive screws and one (1) non-captive screw from the lower cover.

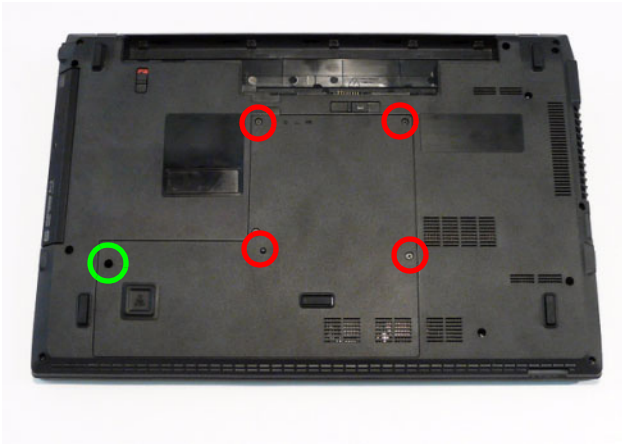


Step	Size	Quantity	Screw Type
Lower Cover Disassembly (green callout)	M2.5*5	1	

- 3. Remove the lower cover as shown.

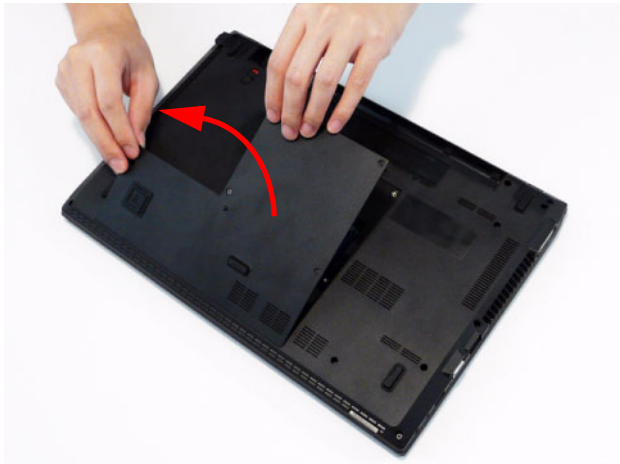


Removing the HDD Module

- 1. See "Removing the Lower Cover" on page 50.
- 2. Remove the one (1) screw.

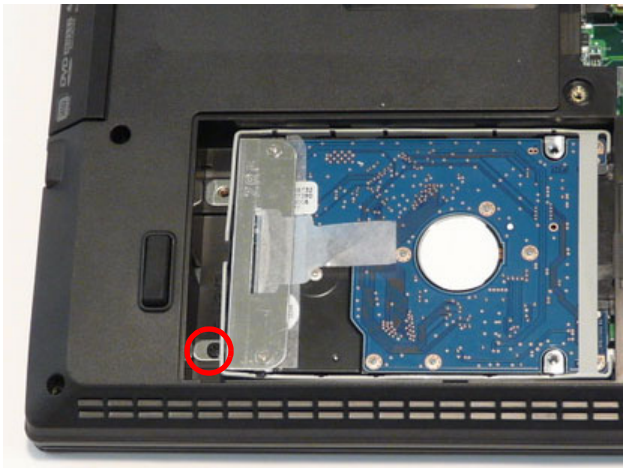


Step	Size	Quantity	Screw Type
HDD Disassembly	M2X3	1	


- 3. Using the pull-tab, slide the HDD Module in the direction of the arrow to disconnect the interface.

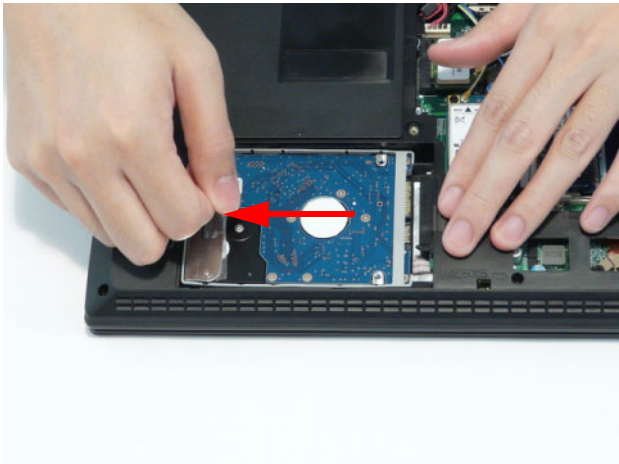


-
4. Tilt the HDD up as shown, then remove from the bay.

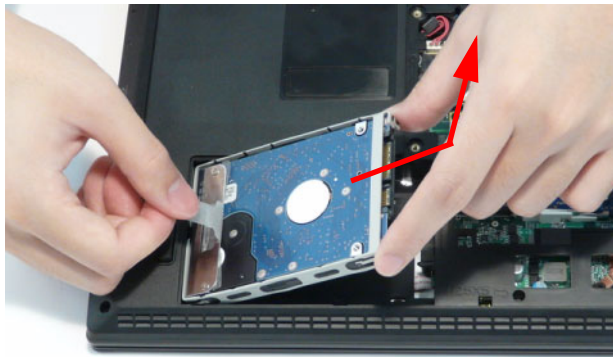


5. Pull the sides of the HDD case to release the latches.

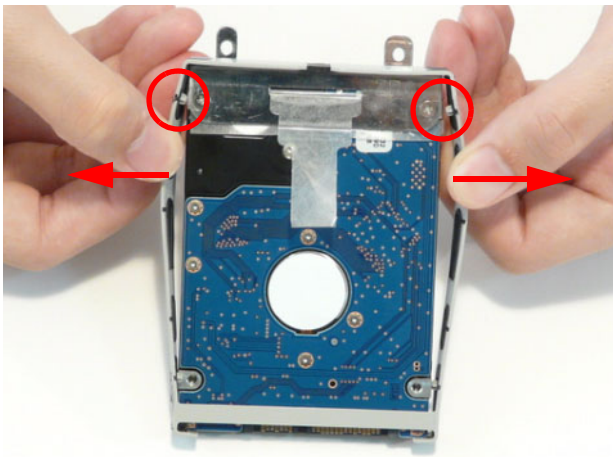

6. Lift the case from the HDD.

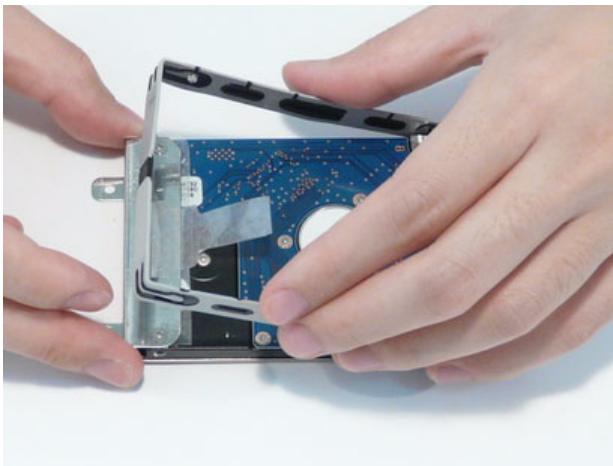


7. Remove the two (2) screws from the bracket.

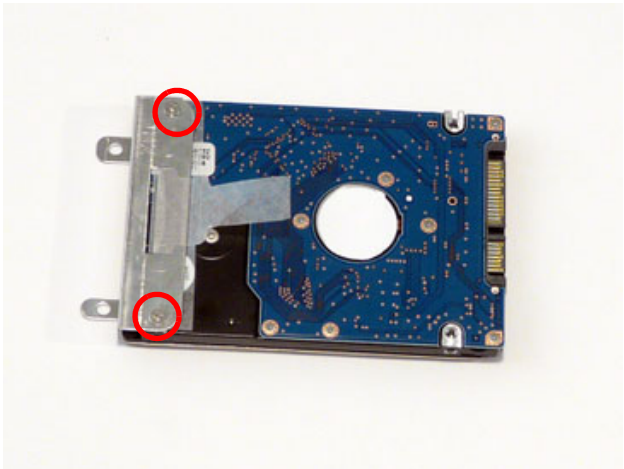


Step	Size	Quantity	Screw Type
HDD Bracket Disassembly	M2.5*3Ni	2	

8. Remove the bracket from the HDD.

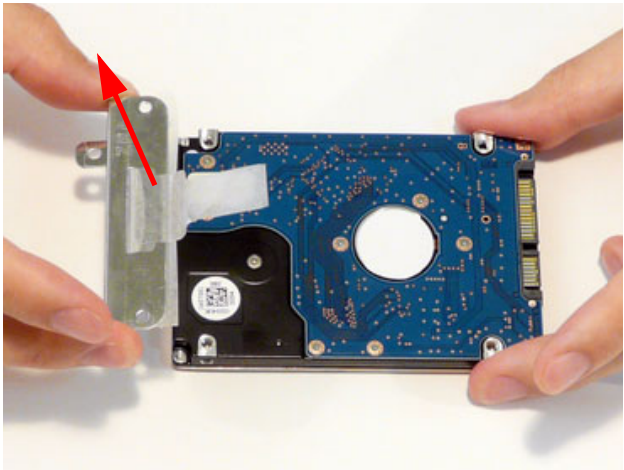


Removing the DIMM Modules

1. See "Removing the Lower Cover" on page 50.
2. Push out the release latches on both sides of the DIMM socket to release the DIMM module.

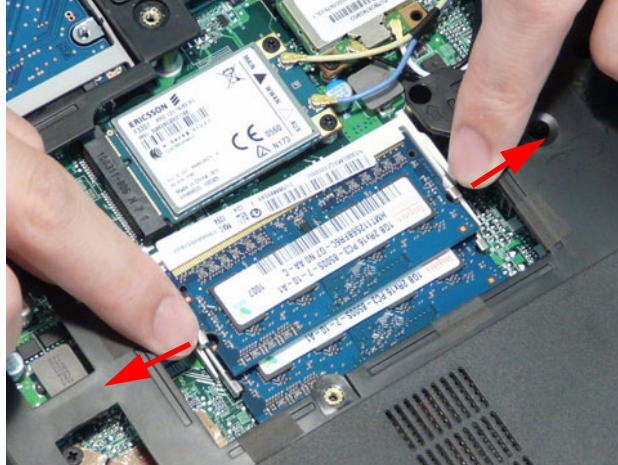


3. Remove the DIMM module.

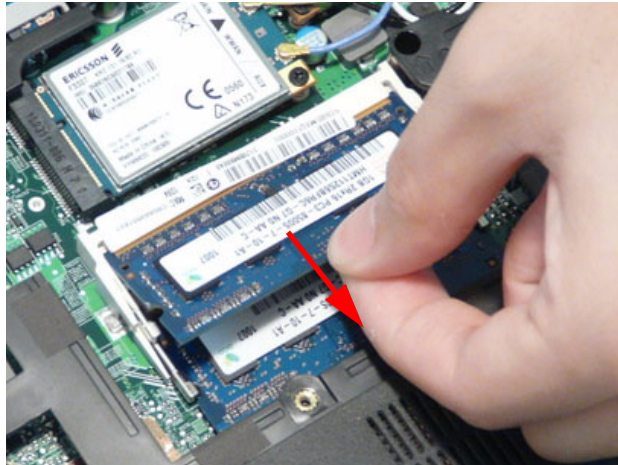

4. Repeat steps for the second DIMM module if present.

Removing the 3G Module

- 1. See “Removing the Lower Cover” on page 50.
- 2. Disconnect the two (2) antenna cables from the 3G Board and remove the two (2) screws to release the 3G Board.

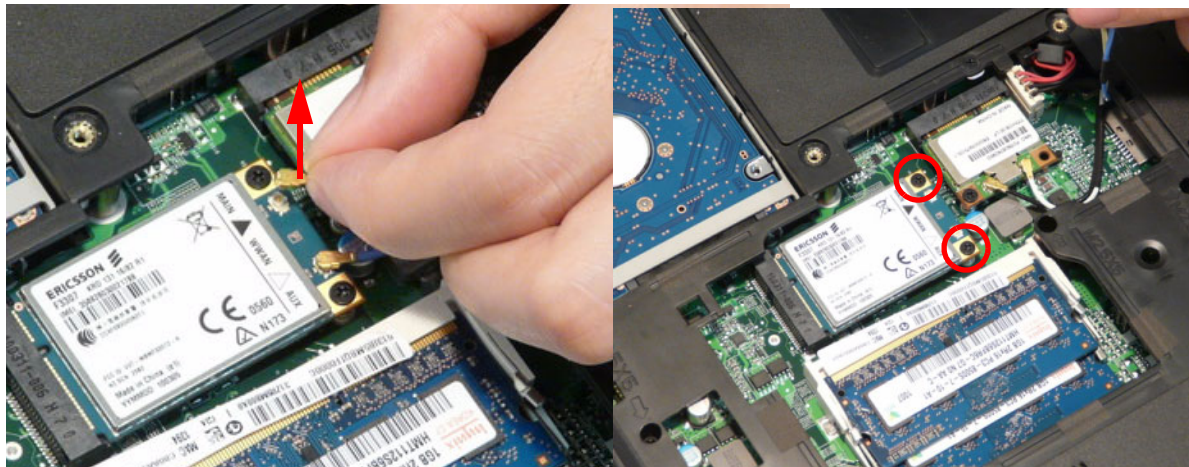

NOTE: Cable placement is as follows: Yellow to Main(left), Blue to Aux(right).

Step	Size	Quantity	Screw Type
3G Board Disassembly	M2.0*3	2	

- 3. Detach and remove the 3G Board from the 3G socket.



Removing the WLAN Module

- 1. See "Removing the Lower Cover" on page 50.
- 2. Disconnect the two (2) cables from the WLAN Board.



NOTE: Cable placement is as follows: White to J1(top), Black to J2(bottom).

- 3. Remove the one (1) screw.



Step	Size	Quantity	Screw Type
WLAN Board Disassembly	M2.0*3	1	

-
4. Detach and remove the 3G Board from the 3G socket.




Removing the Optical Drive Module

- 1. See "Removing the Lower Cover" on page 50.
- 2. Remove the screw securing the ODD module.



Step	Size	Quantity	Screw Type
ODD Module Disassembly	M2.5*3	1	

- 3. Grasp the ODD by the bezel and slide it out of the chassis.

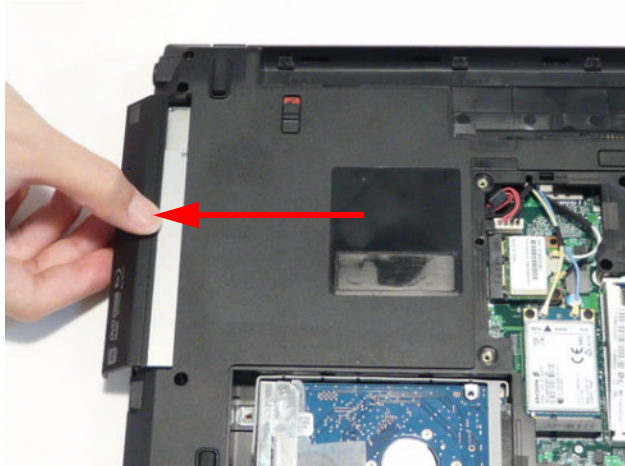

4. Remove the ODD bezel by rotating the top edge downward.




5. Remove the two screws securing the ODD bracket and remove the ODD bracket from the optical disk drive module.




Step	Size	Quantity	Screw Type
ODD Bracket Disassembly	M2.0*3L	2	

6. Remove it from the ODD.

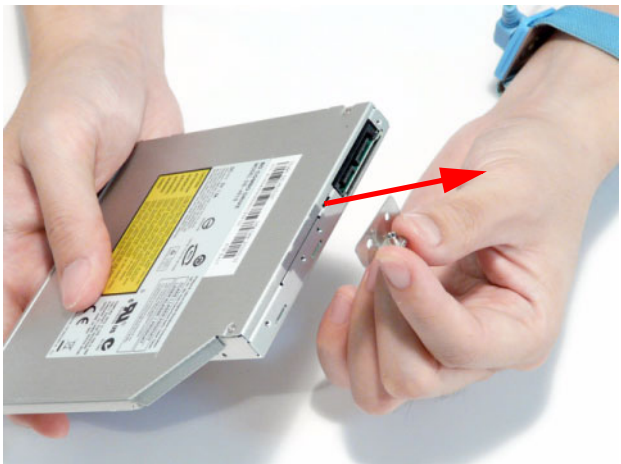

Main Unit Disassembly Process

Main Unit Disassembly Flowchart

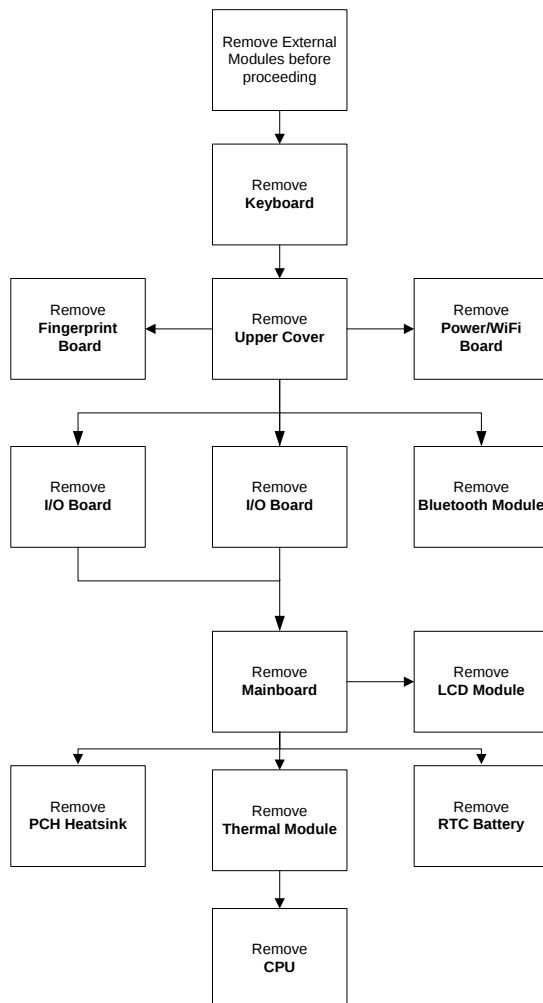


Screw List

Step	Screw	Quantity	Part No.
LCD Module	M2.5*5	4	86.ARE07.003
Lower Cover Disassembly	M2.5*5	15	86.ARE07.003
	M2.0*3	9	86.ARE07.002
Upper Cover Disassembly	M2.5*5	5	86.ARE07.003
Power/WiFi Board Disassembly	M2.5*4	3	86.PTN07.004
Fingerprint Board Disassembly	M2.0*3	1	86.ARE07.002
USB Board Disassembly	M2.5*5	1	86.ARE07.003
Modem Board Disassembly	M2.5*3	2	86.TPK07.003

Step	Screw	Quantity	Part No.
Bluetooth Board Disassembly	M2.0*3	1	86.ARE07.002
Mainboard Disassembly	M2.5*5	2	86.ARE07.003
Thermal Module Disassembly	M2.5*5	2	86.ARE07.003

Removing the Keyboard

1. Turn the computer over and fully open the lid. There are six (6) securing clips that must be released in order to remove the keyboard.

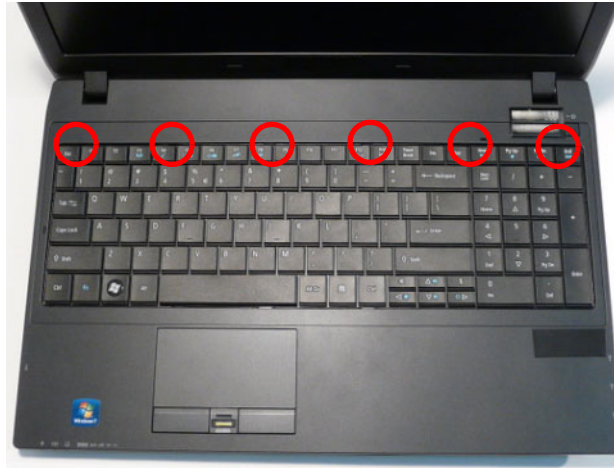


2. Release each clip, working from one side to the other.



3. Using both hands, gently pry up the cover as shown and turn it over.



-
4. Open the locking latch on the FPC, and disconnect the cable as shown.

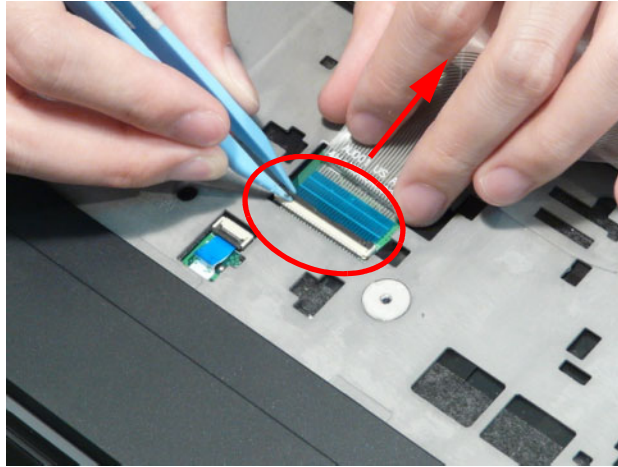


Lift the keyboard clear of the chassis.




Removing the Upper Cover

- 1. See “Removing the Keyboard” on page 62.
- 2. Remove the 24 securing screws from the lower cover.

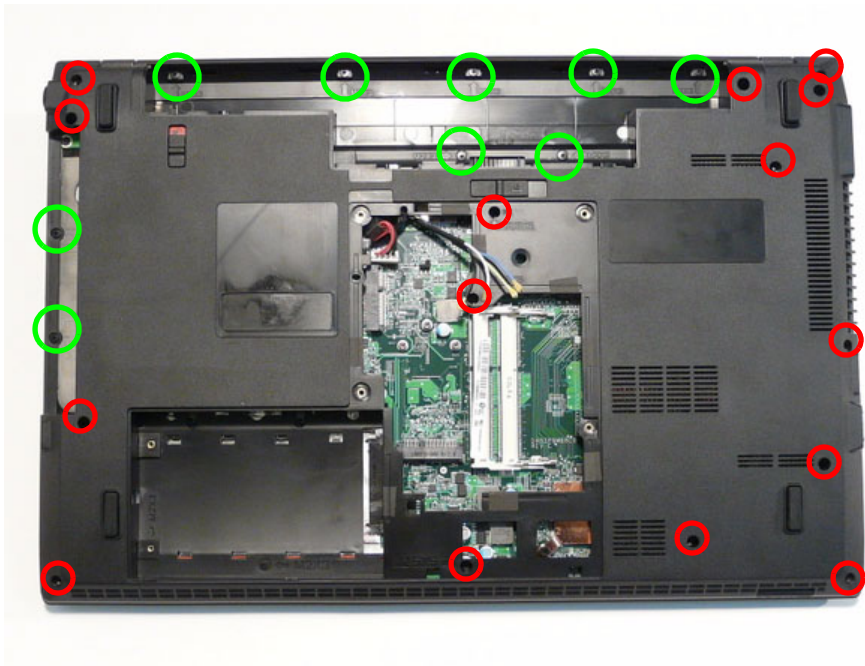


Step	Size	Quantity	Screw Type
Lower Cover (red callout)	M2.5*5	15	
Battery Bay (green callout)	M2.0*3	7	
ODD Bay (green callout)	M2.0*3	2	


3. Turn the computer over. Disconnect the following 3 cables from the Mainboard:
- a. Power/WiFi board FFC
 - b. Touchpad FFC
 - c. Fingerprint FFC

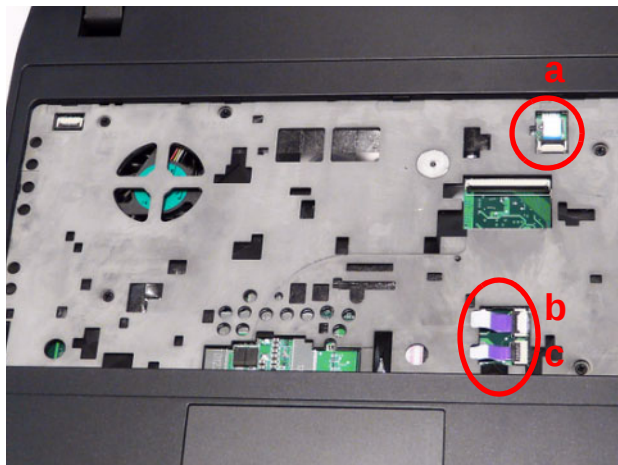


a) Unlock and disconnect the Powerboard/WiFi FFC from the mainboard.

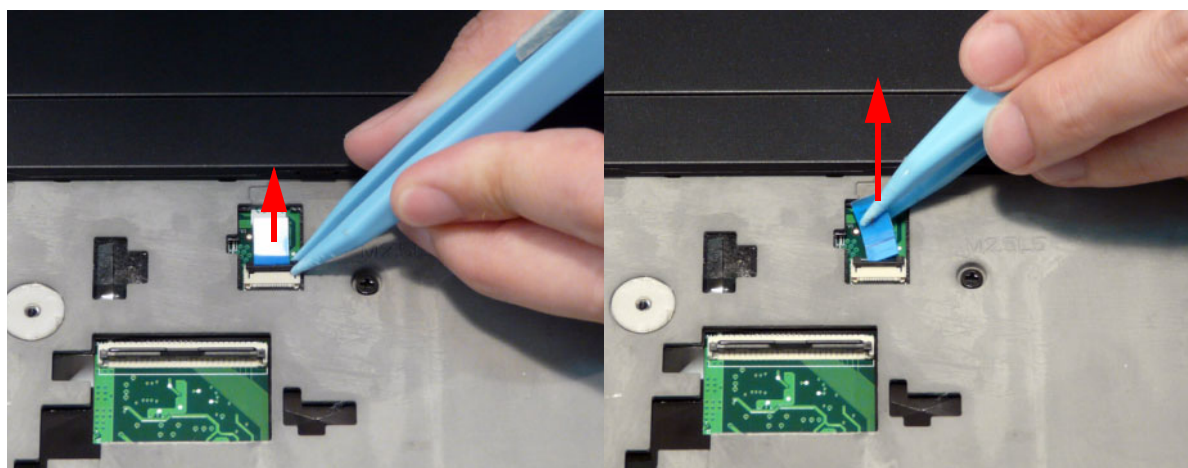

b) Unlock and disconnect the Touchpad FFC from the mainboard.

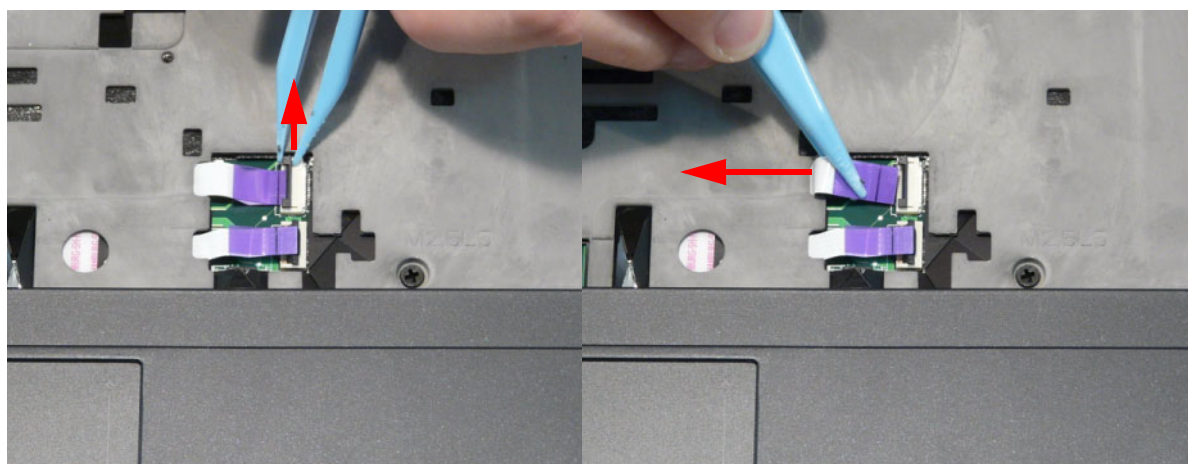


c) Unlock and disconnect the Fingerprint FFC from the mainboard.

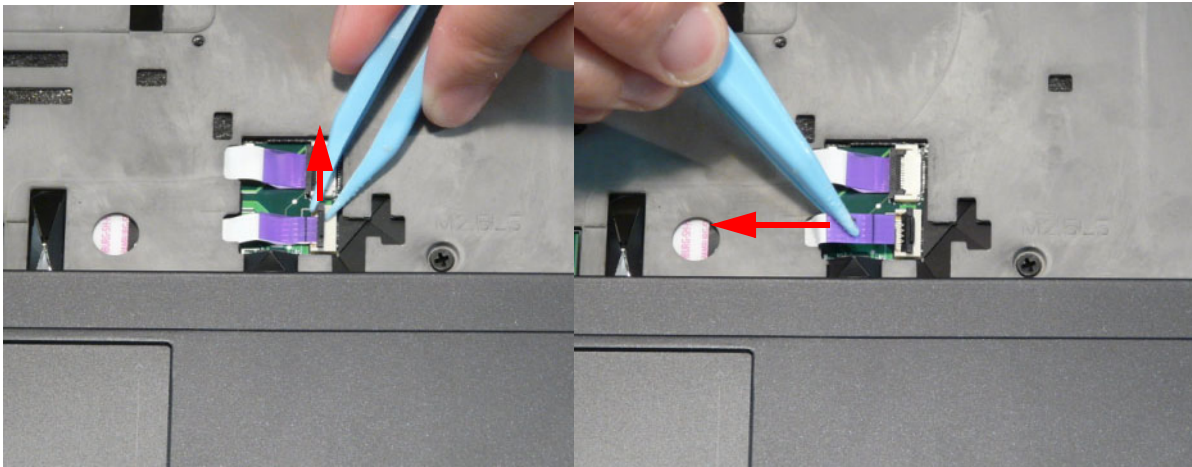

NOTE: Avoid pulling on cables with excessive force to prevent damage to the connectors. Use the pull-tabs on FFC cables whenever available.

4. Remove the five (5) screws from the top cover.

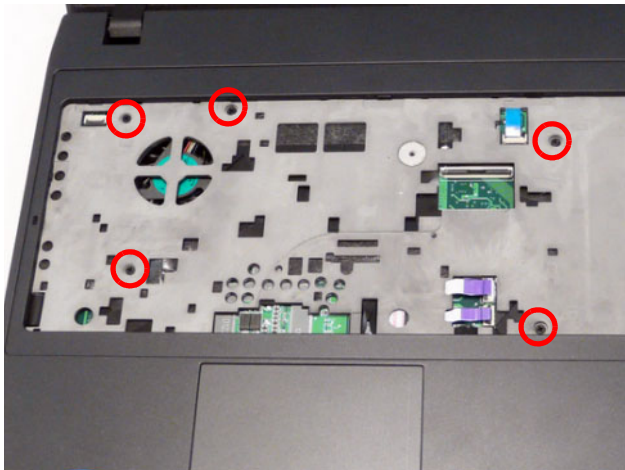


Step	Size	Quantity	Screw Type
Upper Cover Disassembly	M2.5*5	5	


-
5. Using a flat plastic tool, unlock the top right clasp holding the upper cover to the chassis.



6. Work the tool around the edge of the upper cover to release the other clasps as shown.

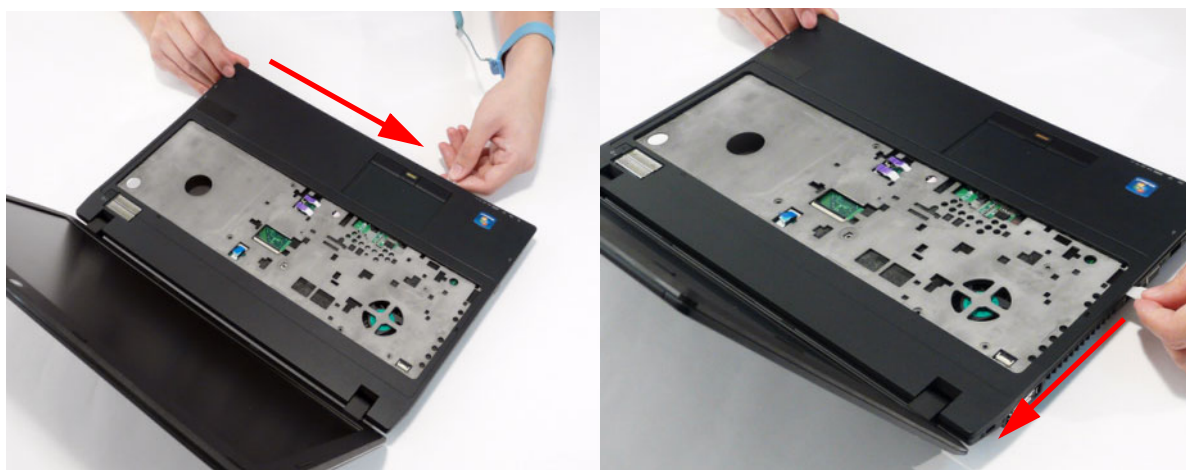

7. Lift the upper cover from the chassis.

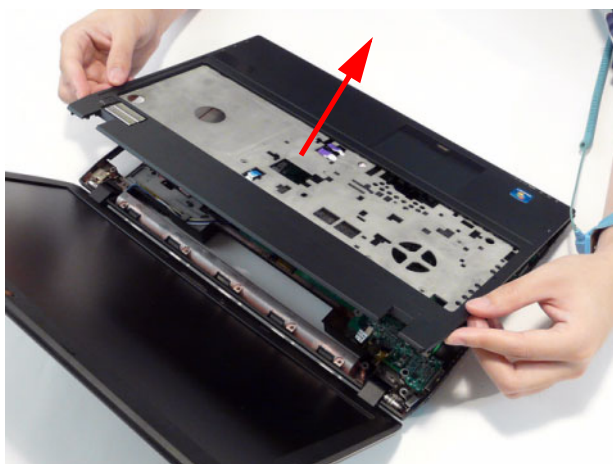


Removing the Power/WiFi Switch Board

1. See "Removing the Upper Cover" on page 64.
2. Locate the Power/WiFi Switch Board on the Upper Cover.




3. Peel back the FFC to free it from the adhesive.

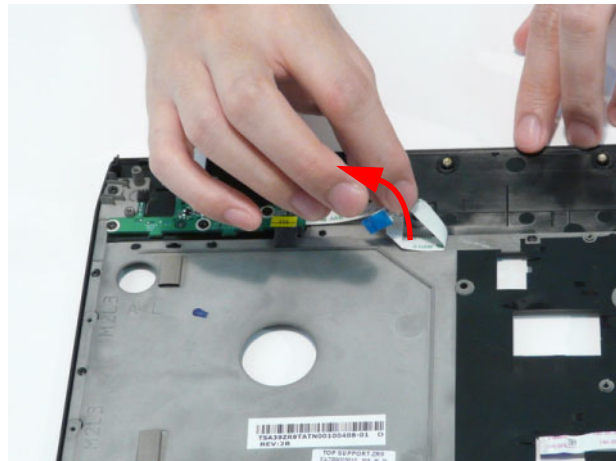


NOTE: Avoid pulling on cables with excessive force to prevent damage to the connectors. Use the pull-tabs on FFC cables whenever available.

4. Remove the three (3) screws.

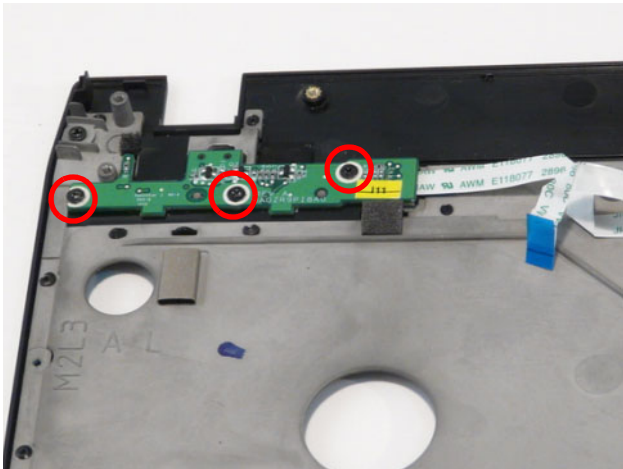


Step	Size	Quantity	Screw Type
Power/WiFi Board Disassembly	2.5*4	3	

5. Lift the power board away from the Upper Cover.

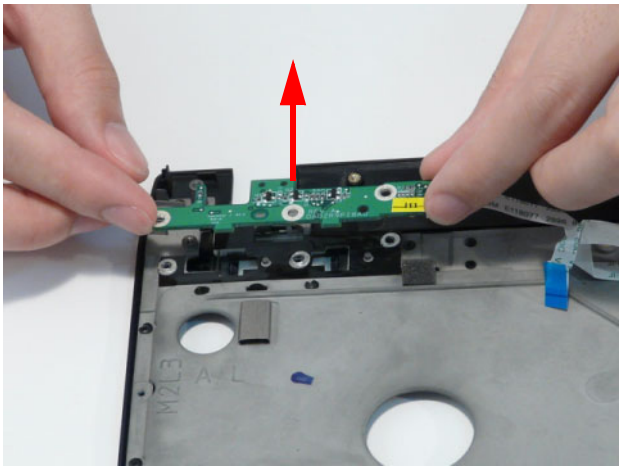


Removing the Fingerprint Board

1. See "Removing the Upper Cover" on page 64.
2. Locate the Fingerprint Board on the Upper Cover.

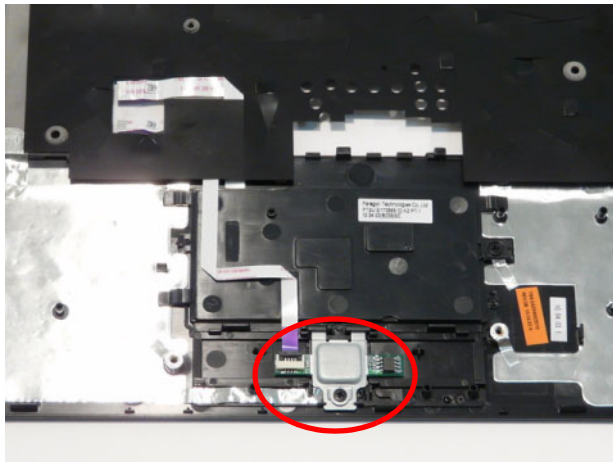


3. Lift up the black mylar and peel back the FFC to free it from the adhesive.

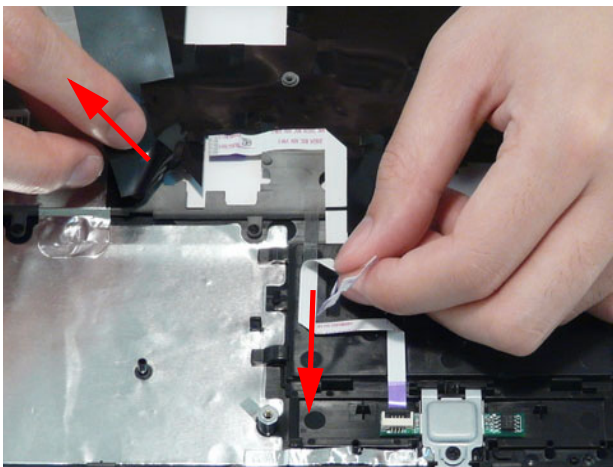


NOTE: Avoid pulling on cables with excessive force to prevent damage to the connectors. Use the pull-tabs on FFC cables whenever available.

4. Unlock and disconnect the Fingerprint FFC from the Fingerprint board.

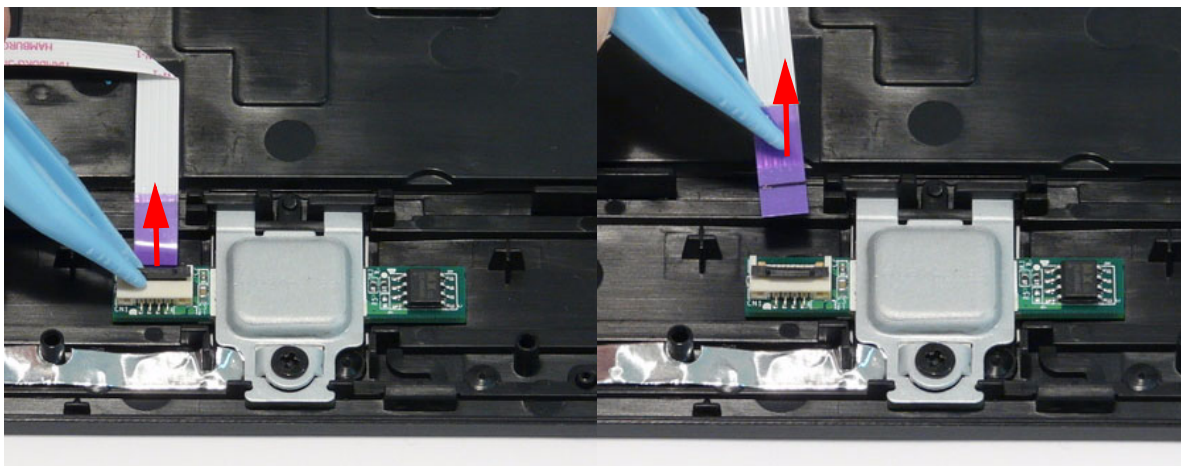


5. Remove one (1) screw.

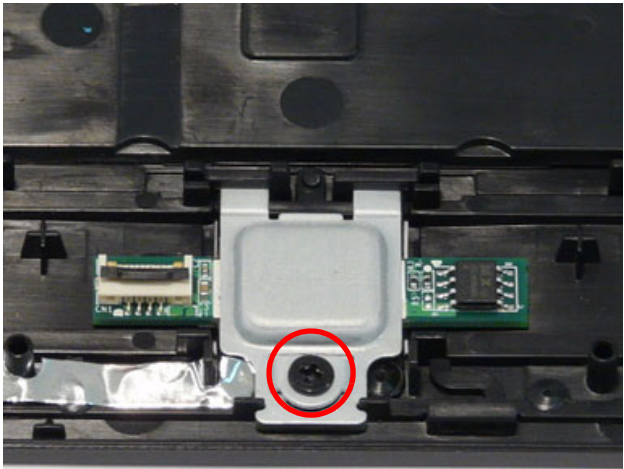


Step	Size	Quantity	Screw Type
Fingerprint Board Disassembly	M2.0*3	1	

6. Lift the bracket up from the narrow end.

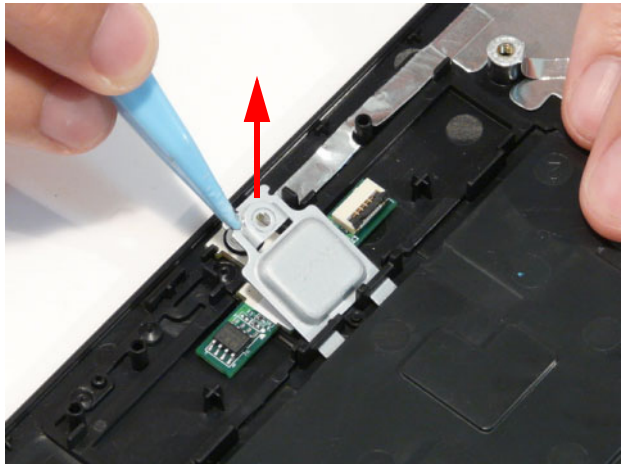


7. Lift the bracket up at an angle to clear the bracket from the guides shown in the picture above.

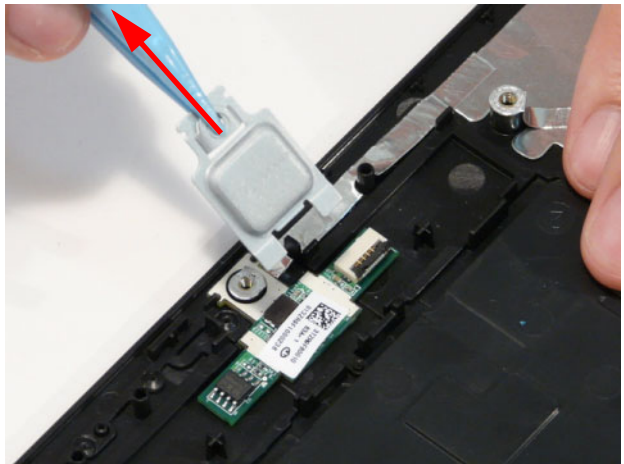


Removing the USB Board

1. See "Removing the Upper Cover" on page 64.
2. Unlock and disconnect the USB FFC from the USB board.

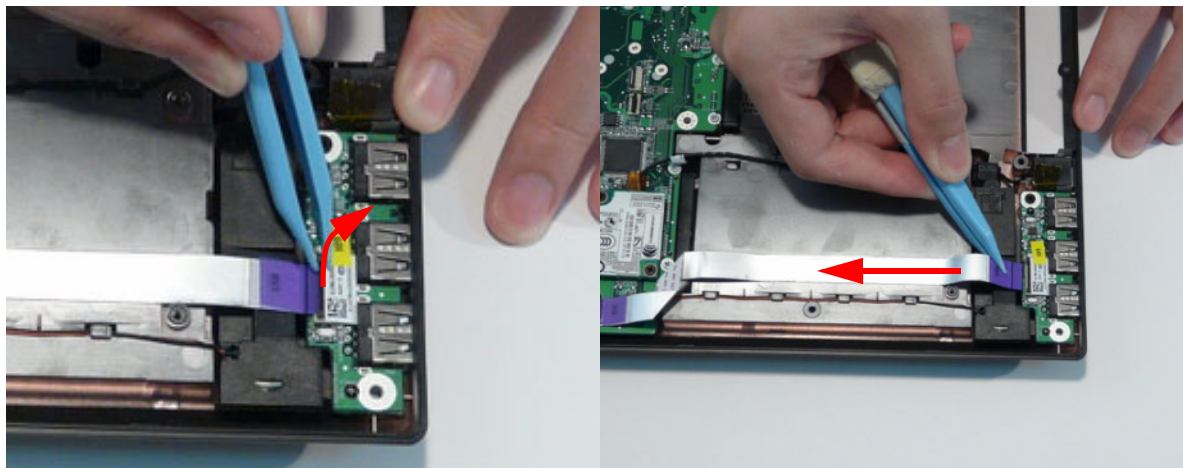


3. Peel back the FFC to free it from the adhesive.

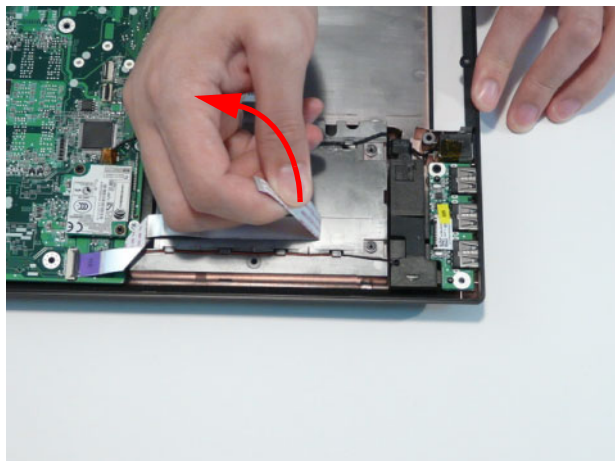


NOTE: Avoid pulling on cables with excessive force to prevent damage to the connectors. Use the pull-tabs on FFC cables whenever available.

4. Unlock and disconnect the USB FFC from the mainboard.

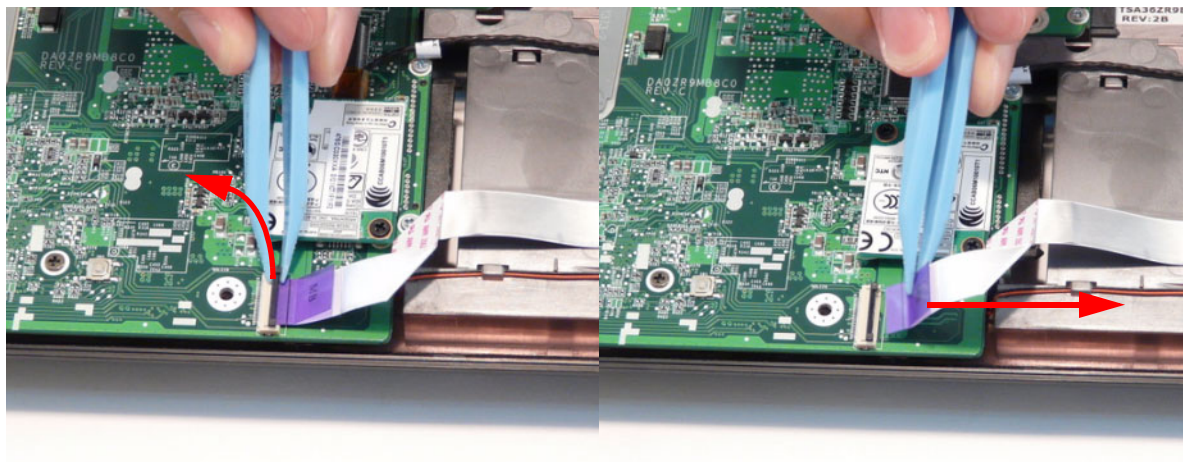


5. Remove one (1) screw.

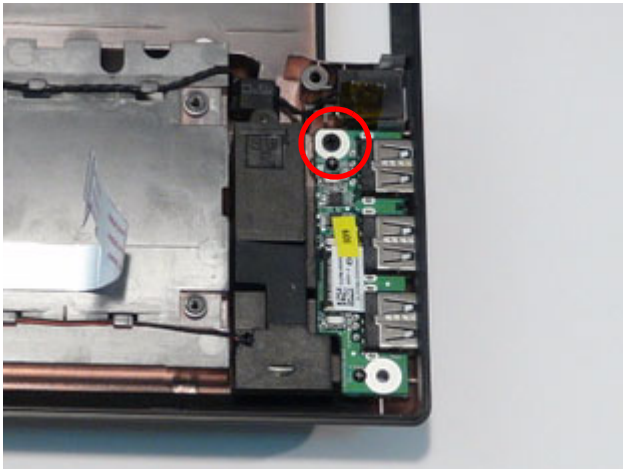

Step	Size	Quantity	Screw Type
USB Board Disassembly	M2.5*5	1	


6. Using plastic tweezers, lift the USB Board upward and away from the chassis.

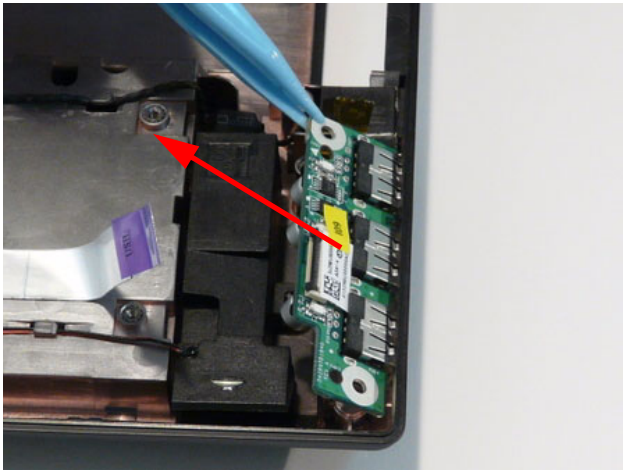


NOTE: The FCC does not need to be removed if you are only replacing the USB board.

Removing the Modem Module

- 1. See “Removing the Upper Cover” on page 64.
- 2. Using plastic tweezers, disconnect the modem cable from the modem module.

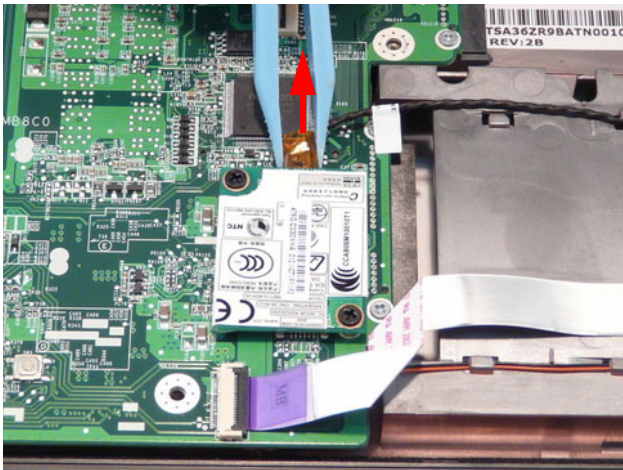


- 3. Remove two (2) screws from the modem board.

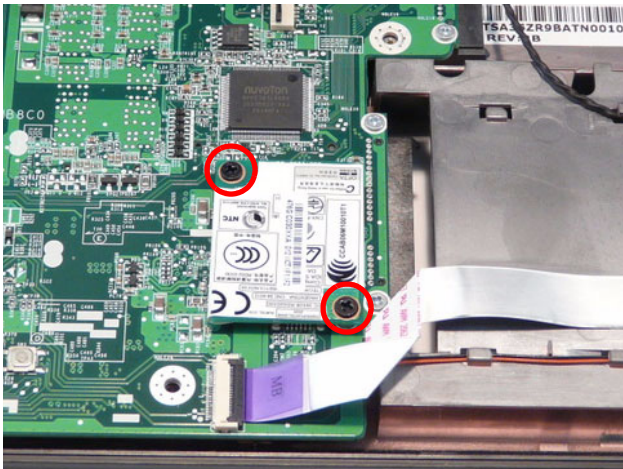


Step	Size	Quantity	Screw Type
Modem Board Disassembly	M2.5*3	2	

-
4. Lift the modem board clear of the mainboard.

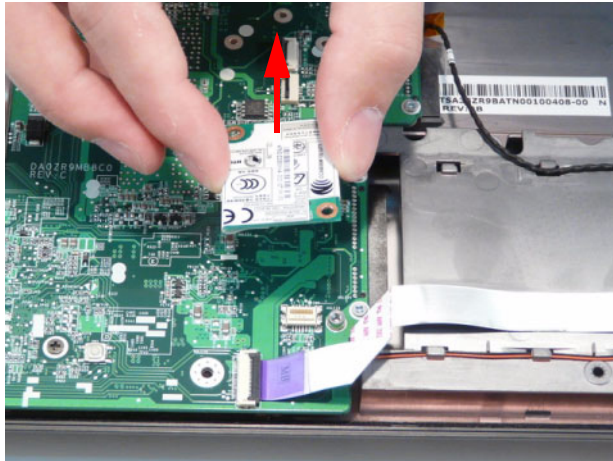


Removing the Bluetooth Module


1. See “Removing the Upper Cover” on page 64.
2. Disconnect the Bluetooth cable from the mainboard.

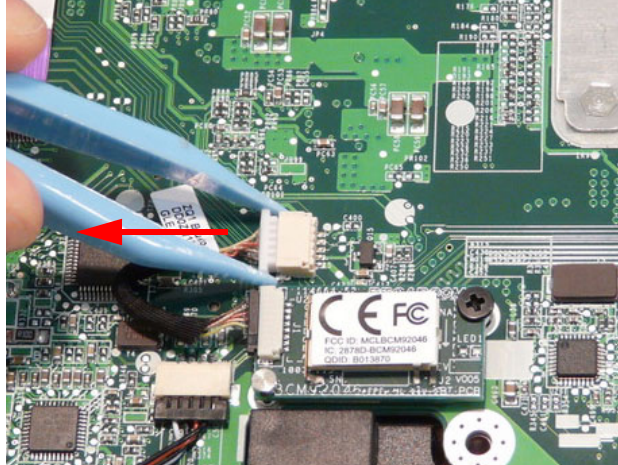

3. Disconnect and remove the Bluetooth cable from the Bluetooth board.

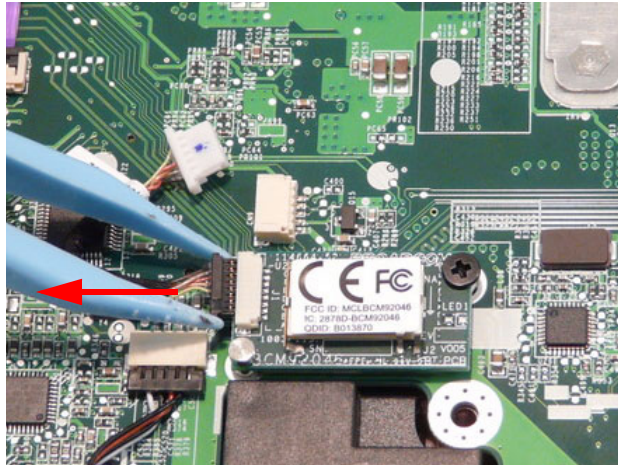


4. Remove the single securing screw from the Bluetooth board.

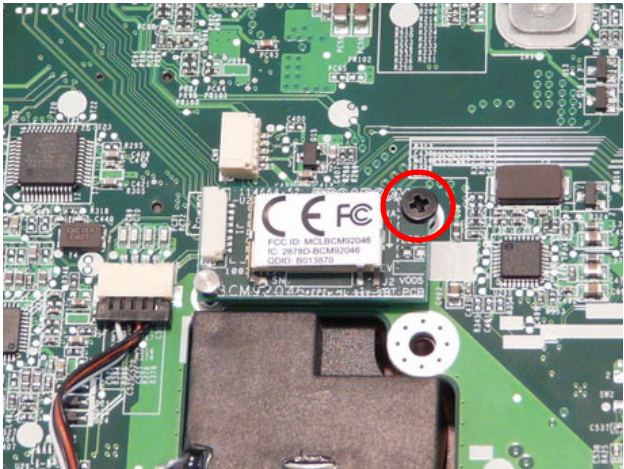


Step	Size	Quantity	Screw Type
Bluetooth Board Disassembly	M2.0*3	1	

5. Using plastic tweezers, lift the Bluetooth board at an angle to clear the guide pin.

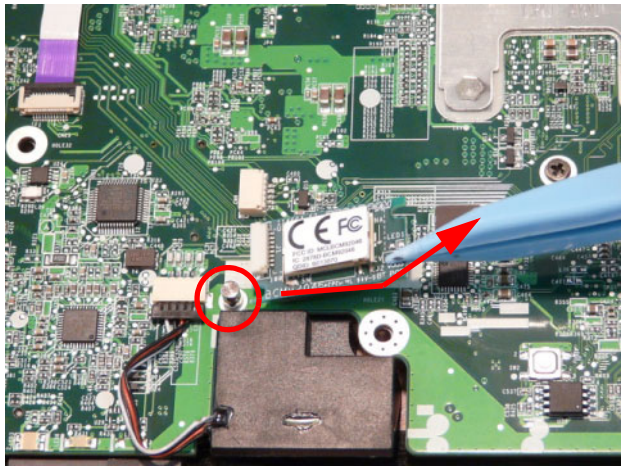


Removing the Speaker FCC


1. See "Removing the Upper Cover" on page 64.
2. Unlock and disconnect the speaker FCC from the mainboard.

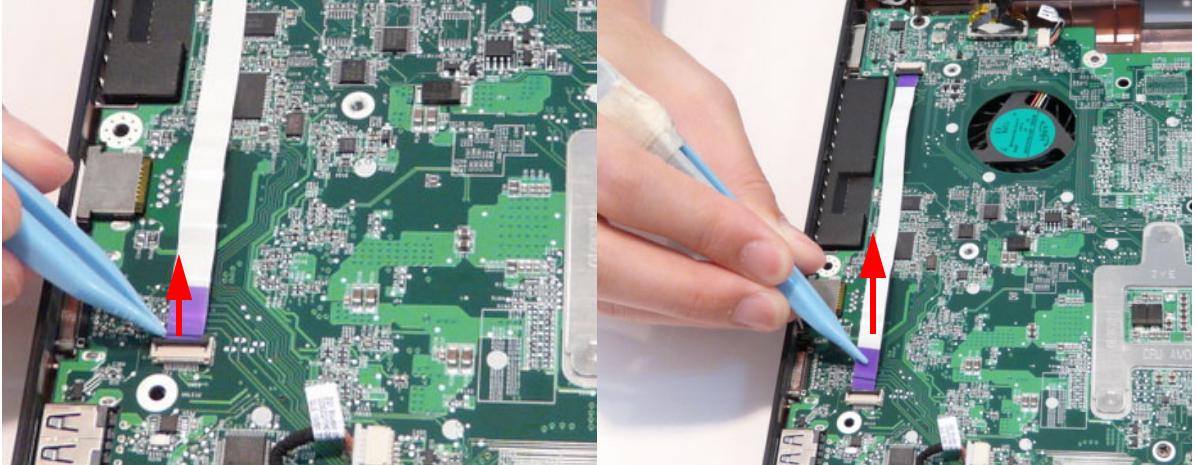

3. Peel back the FFC to free it from the adhesive.

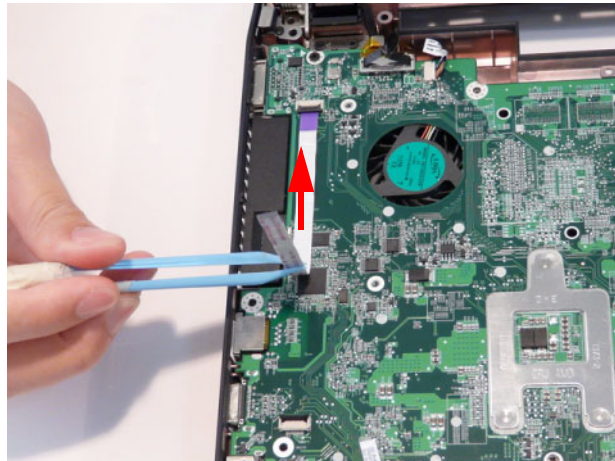


4. Disconnect and remove the speaker FCC from the mainboard.

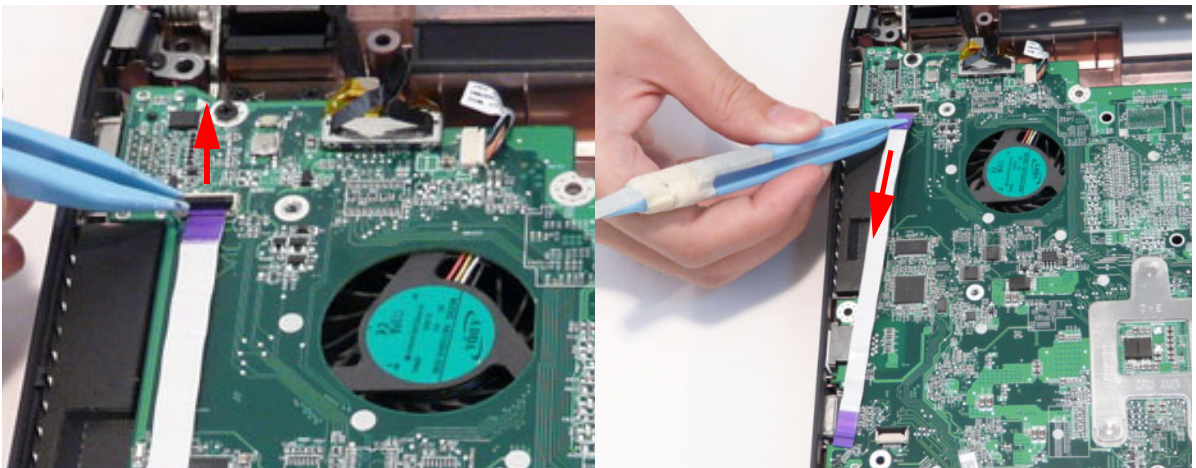


Removing the Mainboard

1. See “Removing the Upper Cover” on page 64.
2. See “Removing the Fingerprint Board” on page 70.
3. See “Removing the Modem Module” on page 74.
4. Disconnect the camera cable and remove from the mainboard.

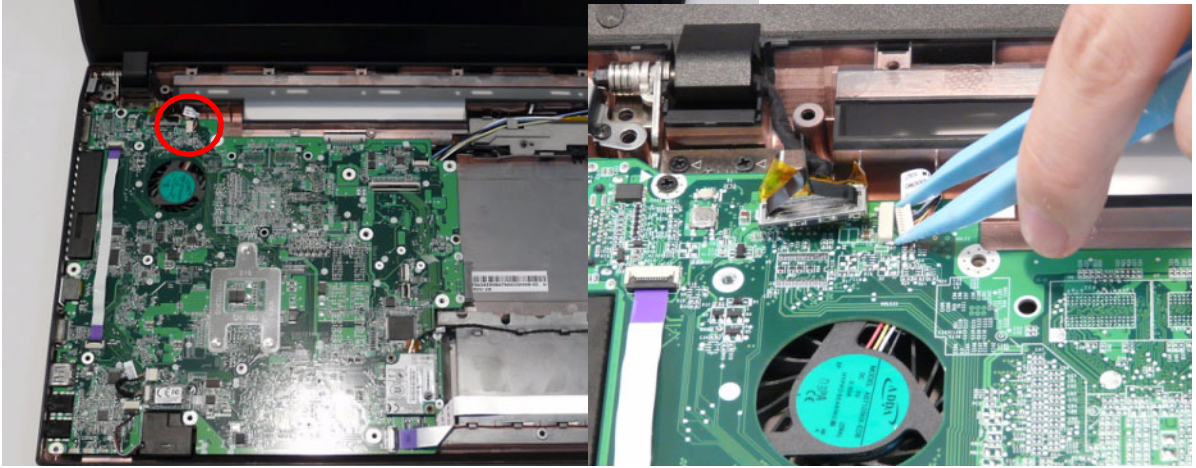


5. Grasp the LVDS cable by the pull tab to disconnect the LVDS cable.

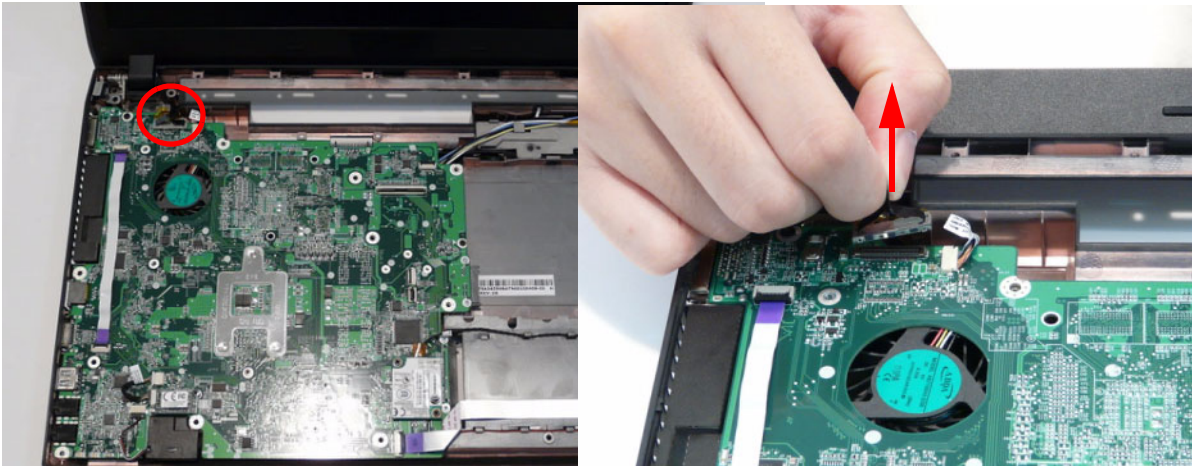

6. Turn the computer over and disconnect the DC-In cable.




7. Remove two (2) securing screws from the Mainboard.

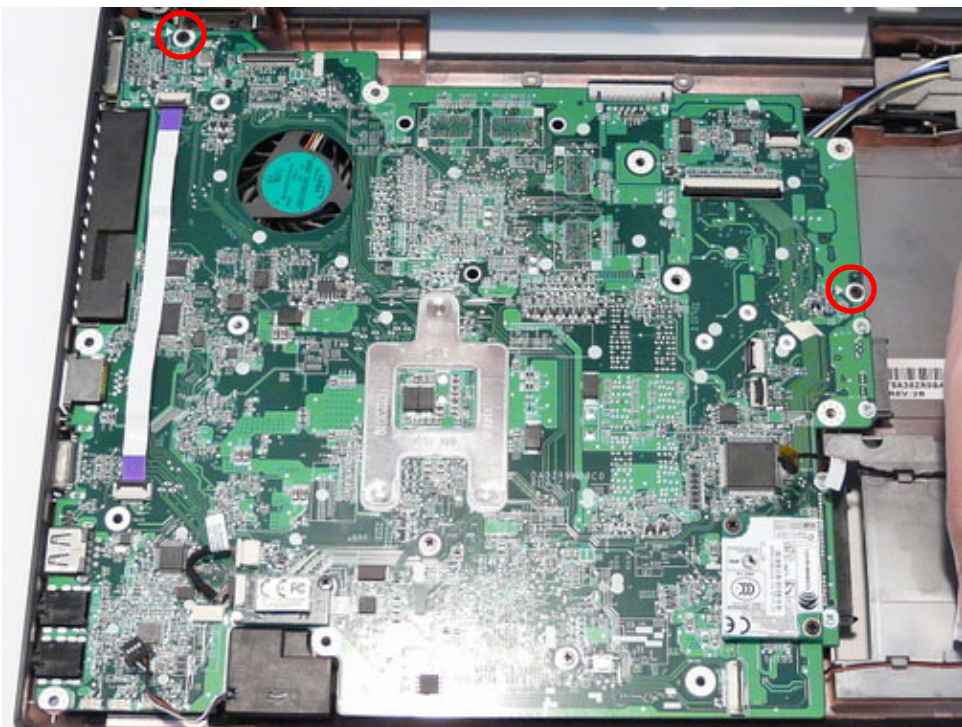


Step	Size	Quantity	Screw Type
Mainboard Disassembly	M2.5*5	2	

8. Pull back the speaker cable and lift the Mainboard right side first and remove it from the Lower Cover.

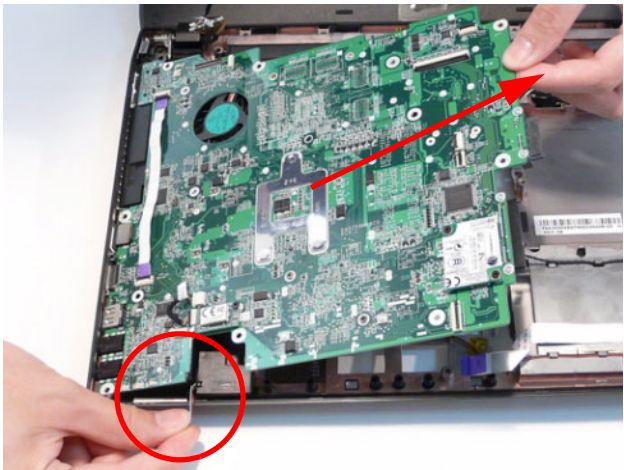


Removing the RTC Battery

1. See "LCD Module Disassembly Process" on page 88.
2. Locate the RTC battery on the mainboard.

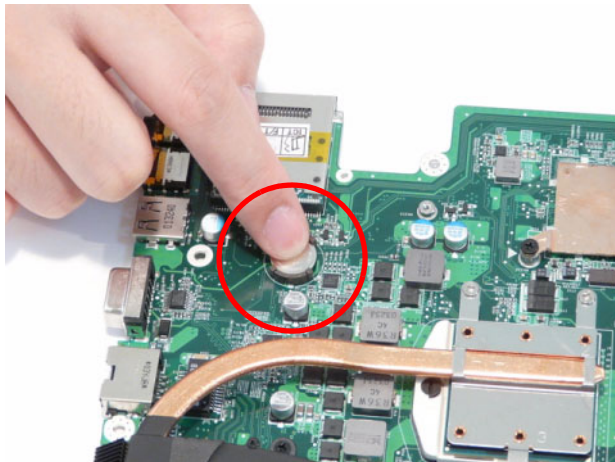


3. Using plastic tweezers, pry the RTC battery from the mainboard.

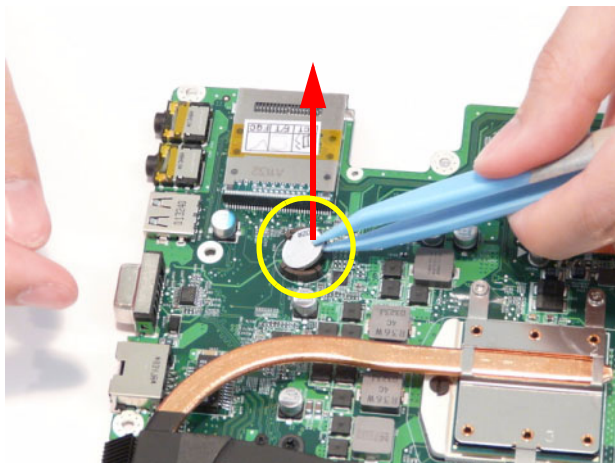


 **NOTE:** The RTC battery has been highlighted with a yellow callout in the previous image. Please detach the RTC battery and follow local regulations for disposal.

Removing the PCH Heatsink

1. See “Removing the Mainboard” on page 79.
2. Loosen two (2) captive screws from the PCH heatsink.

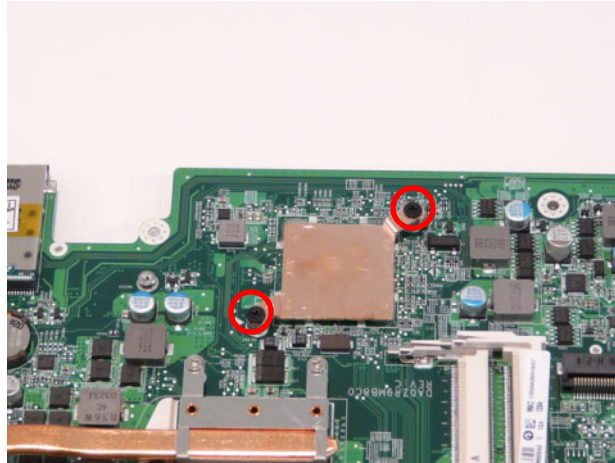


3. Lift the PCH heatsink clear of the mainboard as shown.

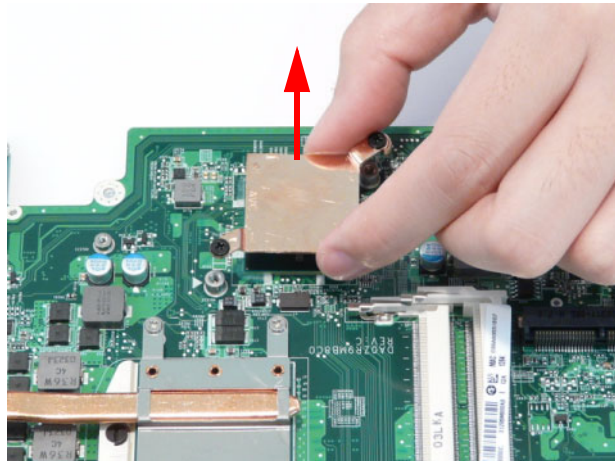


Removing the Thermal Module

- 1. See “Removing the Speaker FCC” on page 78.
- 2. Disconnect the fan cable as shown.

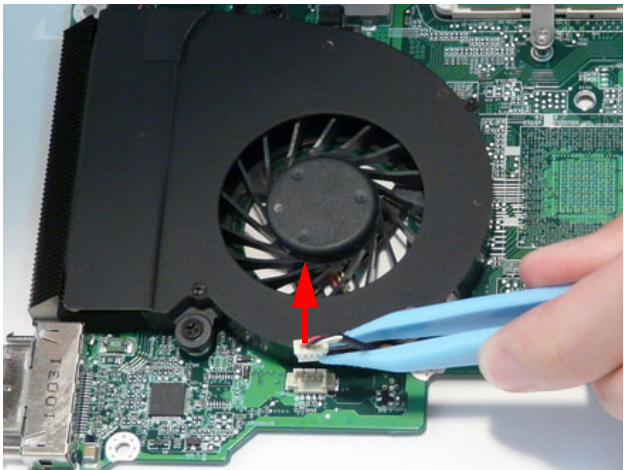


- 3. Remove two (2) securing screws from the Thermal Module.

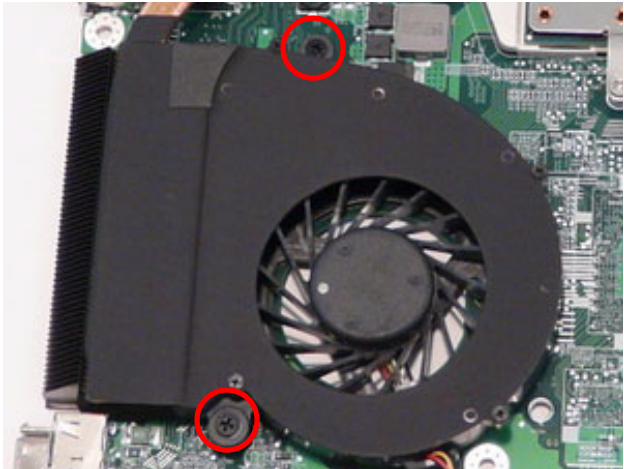


Step	Size	Quantity	Screw Type
Thermal Module Disassembly	M2.5*5	2	

-
4. Loosen the three captive screws (in numerical order from 1 to 3) from the CPU Thermal Module.

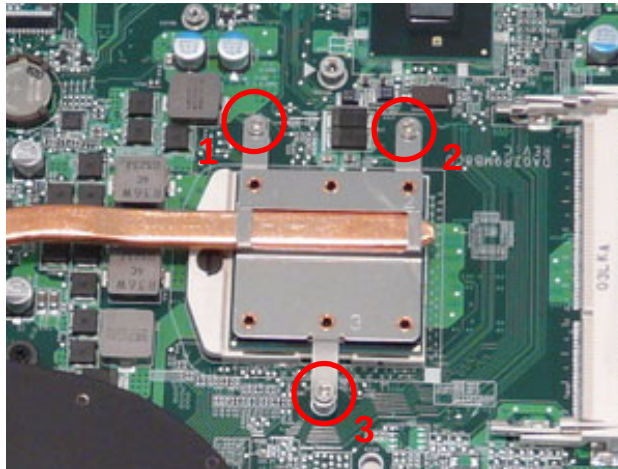


5. Lift the Thermal Module clear of the Mainboard.


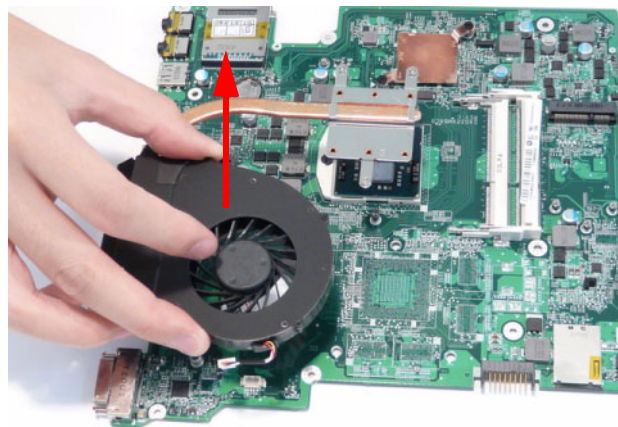


Removing the CPU

1. See “Removing the Thermal Module” on page 83.
2. Using a flat head screw driver, rotate the CPU locking screw 180° counter-clockwise as shown.

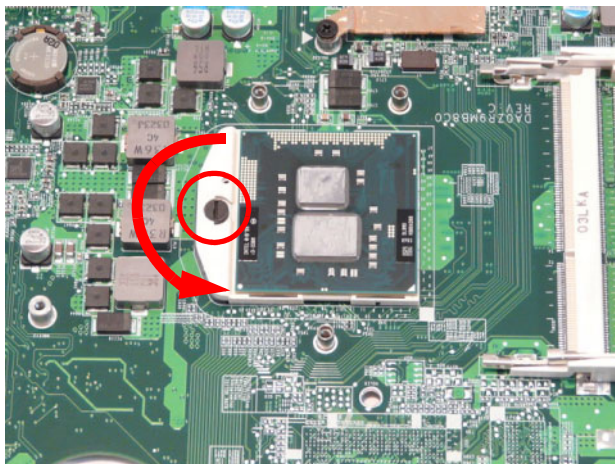

3. Lift the CPU clear of the socket as shown.

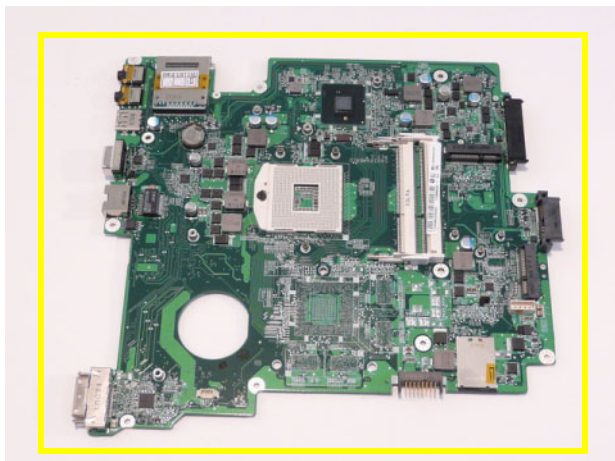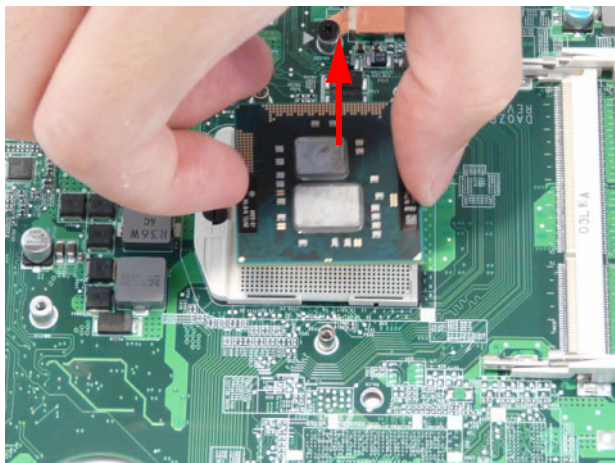


IMPORTANT: Place the CPU on a clean, dry surface when it is not installed.

NOTE: The mainboard has been highlighted with a yellow callout in the previous image. Please detach the mainboard and follow local regulations for disposal.




Removing the LCD Module

- 1. See “Removing the Mainboard” on page 79.
- 2. Remove four (4) screws from the right and left hinges.

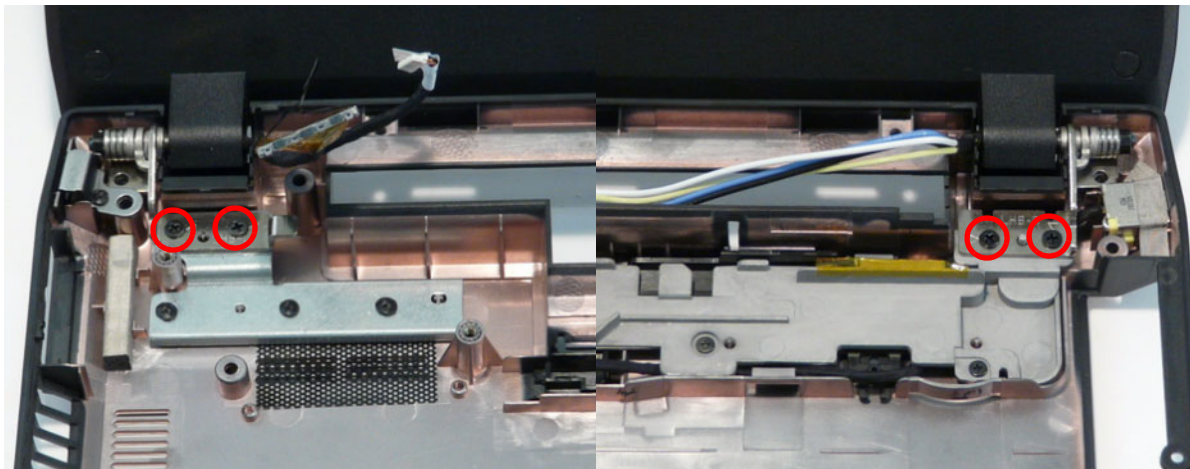


Step	Size	Quantity	Screw Type
LCD Module Disassembly	M2.5*5	4	

- 3. Remove the cables from the cable guides.

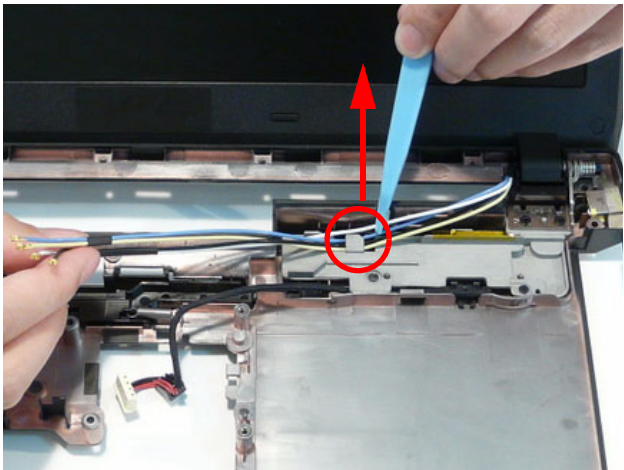


-
4. Ensure that all cables entering the LCD are free of the chassis and remove the LCD module from the chassis.

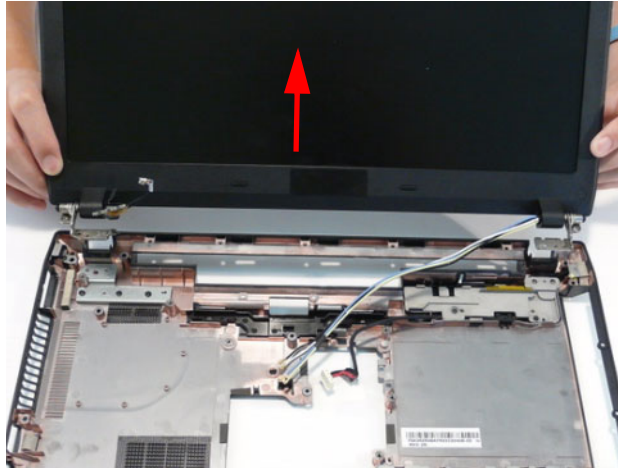

LCD Module Disassembly Process

LCD Module Disassembly Flowchart

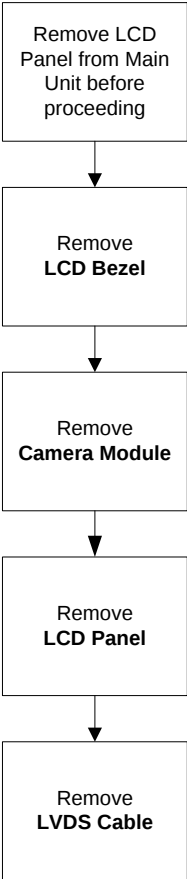

Screw List

Step	Screw	Quantity	Part No.
LCD Bezel	M2.5*4	2	86.PTN07.004
LCD Panel	M2.0*3	4	86.ARE07.002


Removing the LCD Bezel

- 1. See "Removing the LCD Module" on page 86.
- 2. Remove the two (2) lower bezel screw caps and screws.



Step	Size	Quantity	Screw Type
LCD Bezel Disassembly	M2.5*4	2	


- 3. Using a flat plastic tool, pry the bezel upwards at the bottom of the LCD module releasing it from the latch.

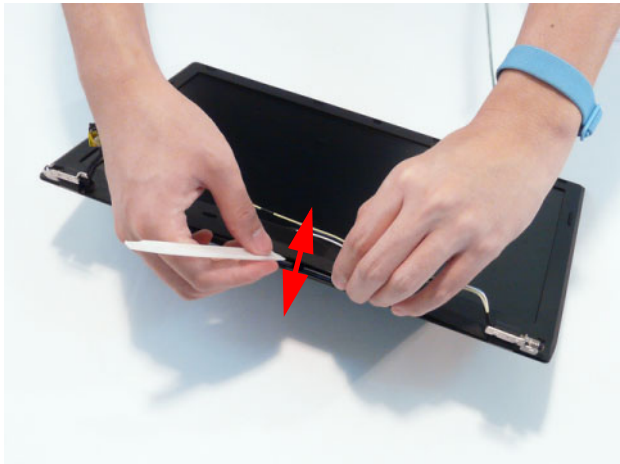

-
4. Move to the bottom-left corner of the bezel, pry the bezel upwards clearing the hinge cap from the hinge.




5. Move to the bottom-right corner of the bezel, pry the bezel upwards clearing the hinge cap from the hinge.

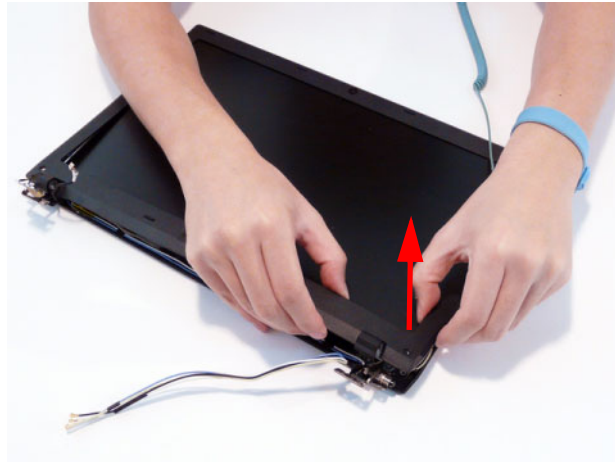

6. Move along the sides to the top of the LCD module until all latches under the bezel are unlocked.




7. Lift the Bezel clear of the LCD Module.

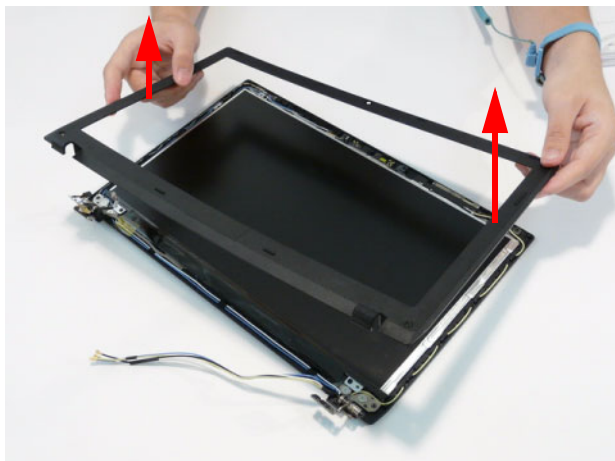


Removing the Camera Module


1. See "Removing the LCD Bezel" on page 89.
2. Disconnect the camera cable.

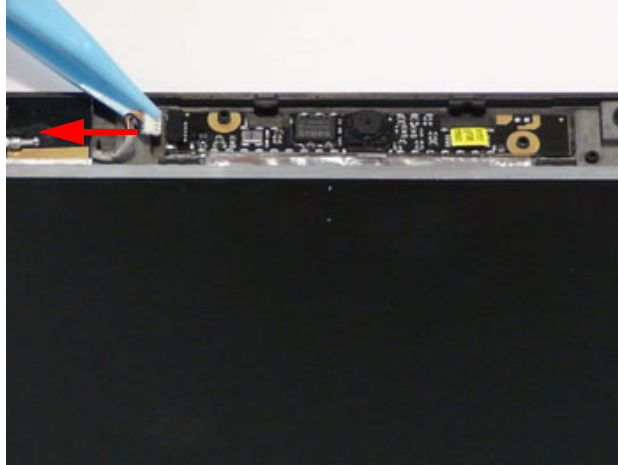

3. Using plastic tweezers, lift the camera module from the adhesive.

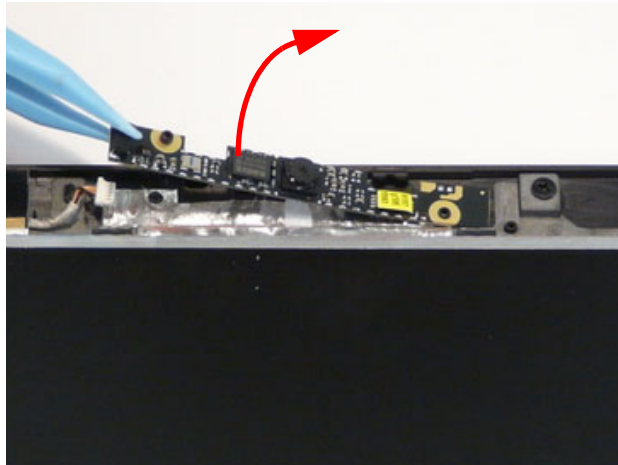


4. Remove the camera module from the LCD cover.

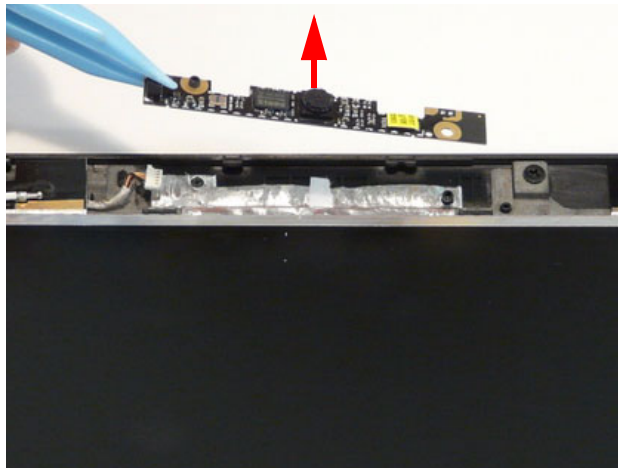

Removing the LCD Panel

- 1. See "Removing the LCD Bezel" on page 89.
- 2. Remove the tape securing the LVDS cable and 3G/WLAN antennas to the LCD cover.

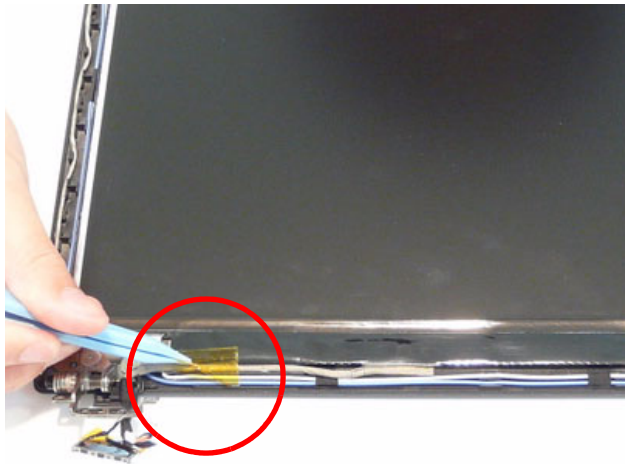


- 3. Remove the four (4) securing screws from the LCD Panel.



Step	Size	Quantity	Screw Type
LCD Panel Disassembly	M2*3	4	

-
4. Remove the LVDS cable from the cable guides.

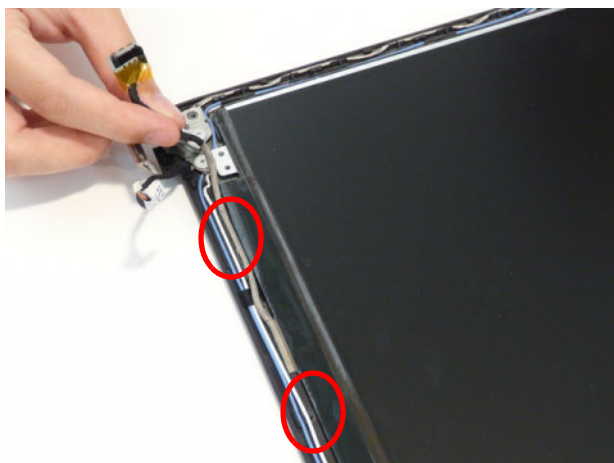


5. Lift the LCD Panel clear of the LCD cover as shown.




Removing the LVDS Cable

1. See "Removing the LCD Panel" on page 93.
2. Turn the LCD panel over. Remove the yellow adhesive securing the LVDS cable in place.

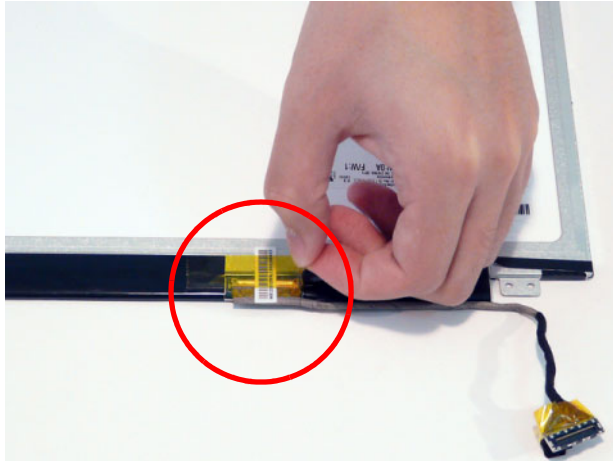

3. Starting from the top, remove the clear adhesive and disconnect the cable from the LCD Panel.

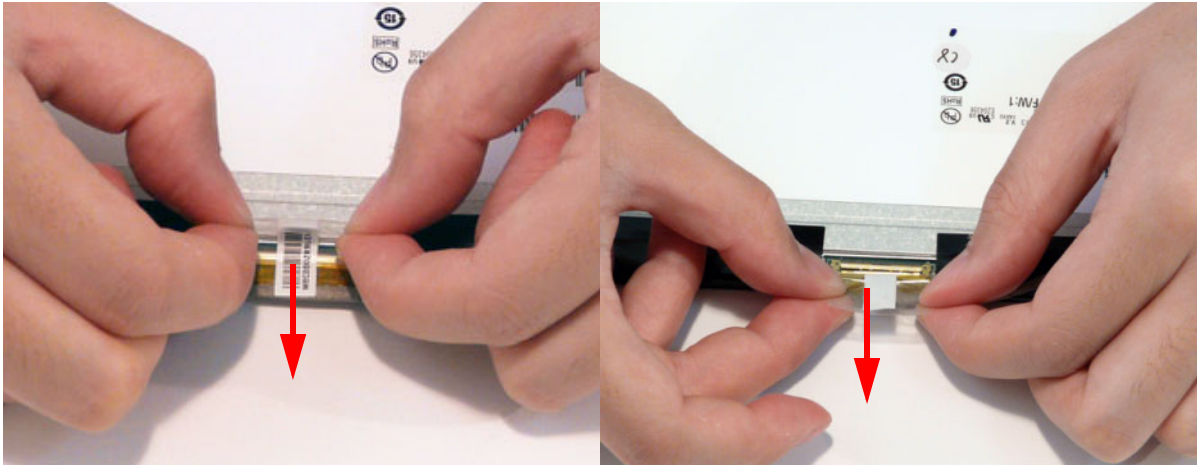


LCD Module Reassembly Procedure

Replacing the LVDS Cable

1. Connect the LVDS cable to the LCD Panel and replace the clear tape to secure the connector.



2. Replace the yellow adhesive securing the LVDS cable.

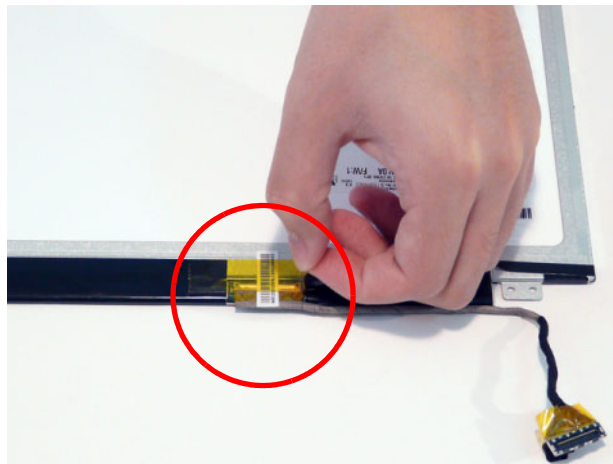


Replacing the LCD Panel

1. Place the LCD Panel onto the LCD cover as shown.



2. Place the LVDS cable into the cable guides.

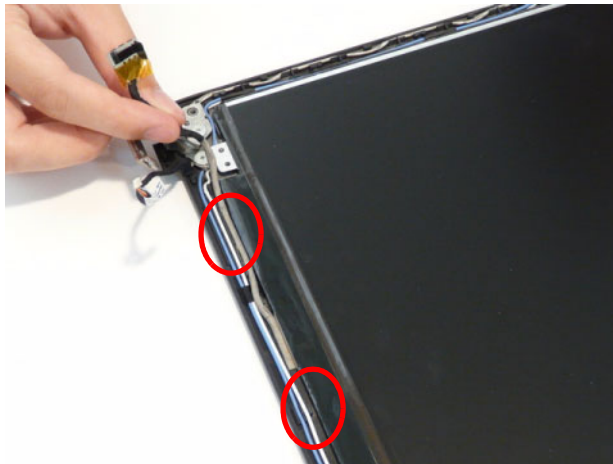


3. Replace four (4) screws.




Step	Size	Quantity	Screw Type
LCD Panel Assembly	M2*3	4	

4. Replace the tape securing the LVDS cable and 3G/WLAN antennas to the LCD cover.

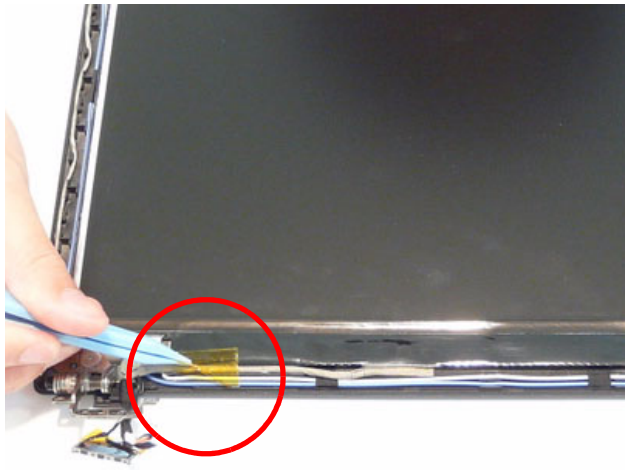


Replacing the Camera Module

1. Using plastic tweezers, place the camera module onto the module using the guide pins.

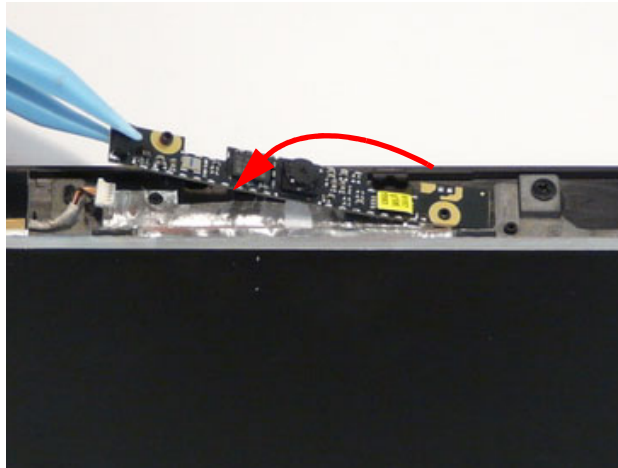


2. Connect the camera cable.

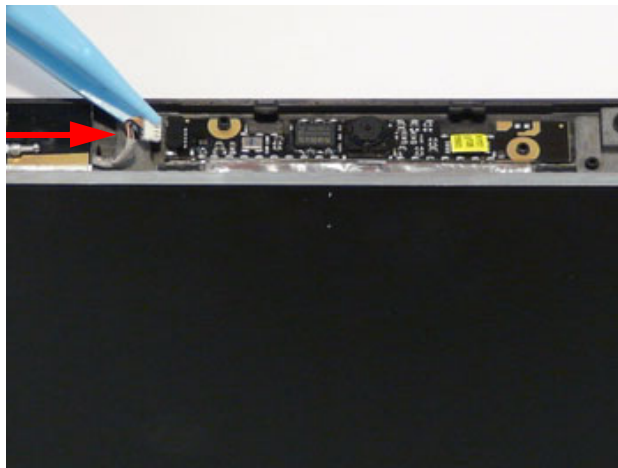

Replacing the LCD Bezel

- 1. Place the Bezel onto the LCD Module.

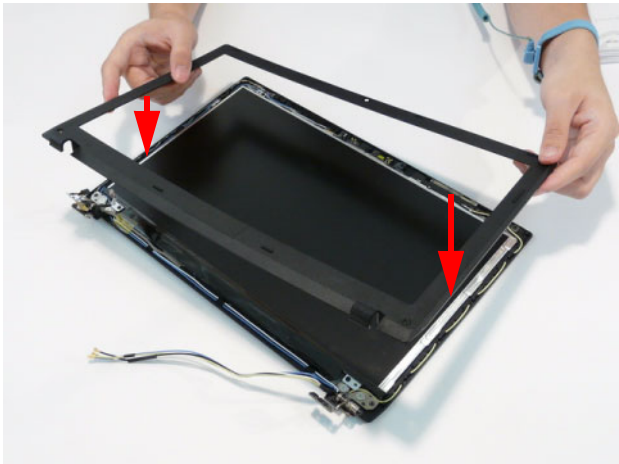

- 2. Press down on the sides of the LCD Bezel to lock the latches.




- 3. Replace the two (2) bezel screw caps and screws.



Step	Size	Quantity	Screw Type
LCD Bezel Assembly	M2.5*4	2	


Replacing the LCD Module

- 1. Place the LCD module onto the chassis as shown.

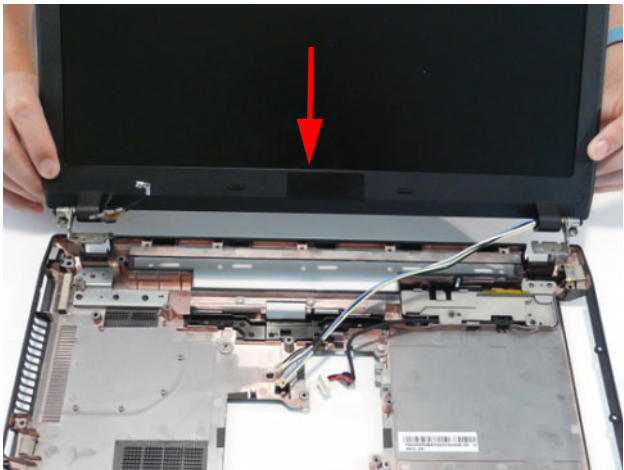


NOTE: Ensure that all cables are clear of the hinges.

- 2. Replace four (4) screws to secure the right and left hinges.

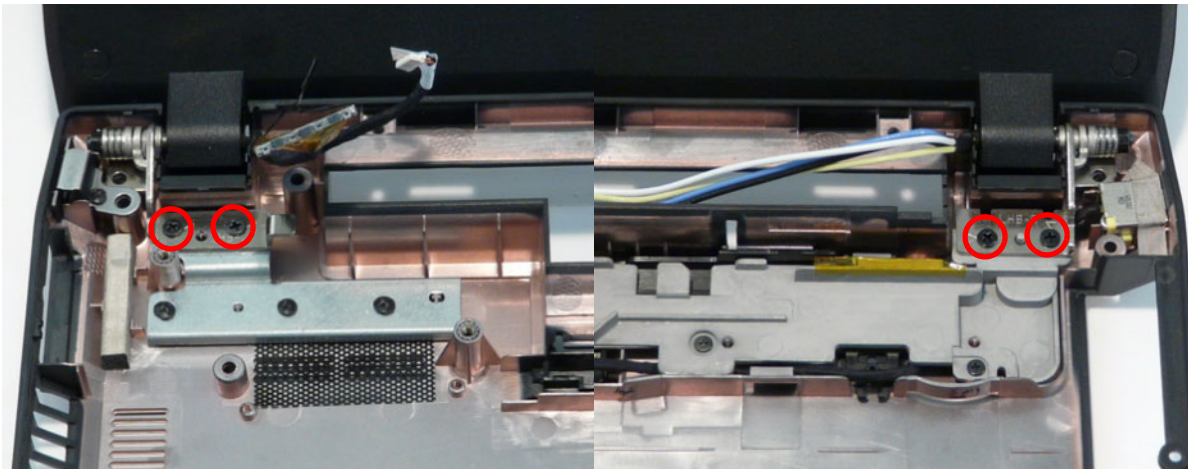


Step	Size	Quantity	Screw Type
LCD Module Assembly	M2.5*5	4	

3. Replace the cables into the cable guides.

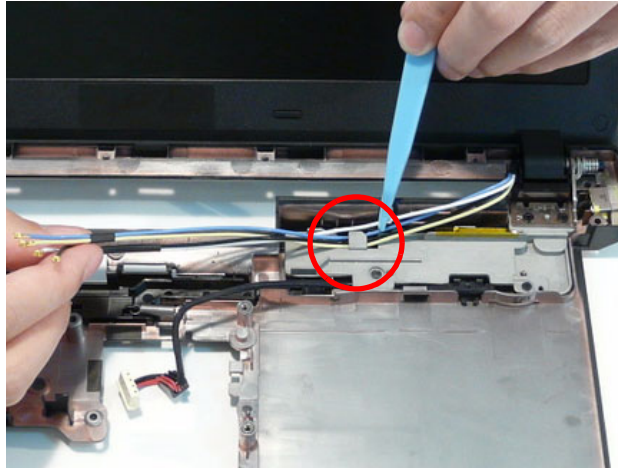


Replacing the CPU

1. Place the CPU into the socket as shown.

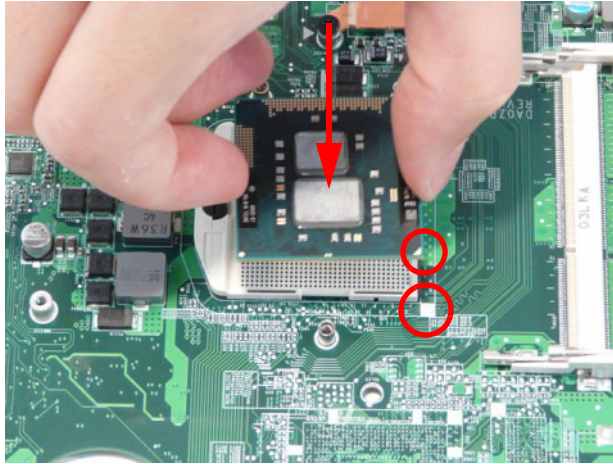


NOTE: Line up the guide markers as shown above.

2. Using a flat head screw driver, rotate the CPU locking screw 180° clockwise to lock the CPU in place.

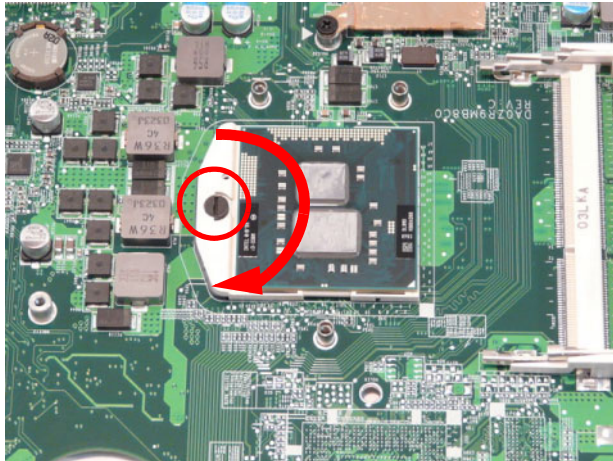


Removing the Thermal Module


1. Place the Thermal Module onto the Mainboard.

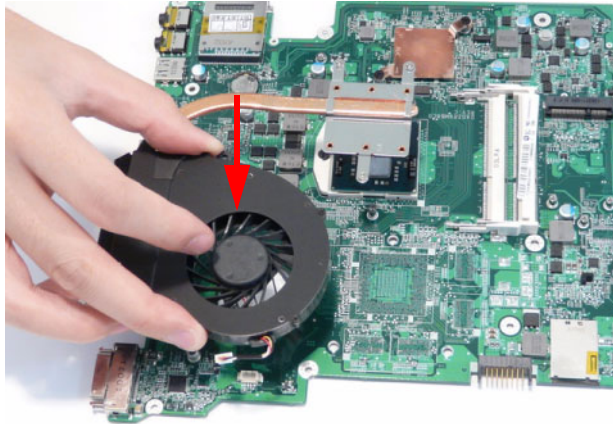

2. Tighten the three captive screws (in numerical order from 1 to 3).

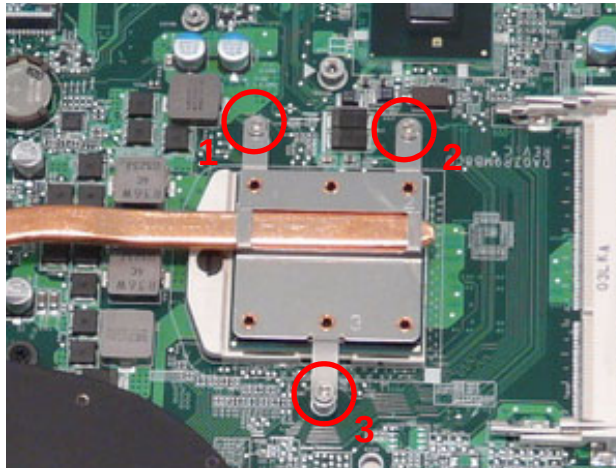


3. Replace two (2) screws.

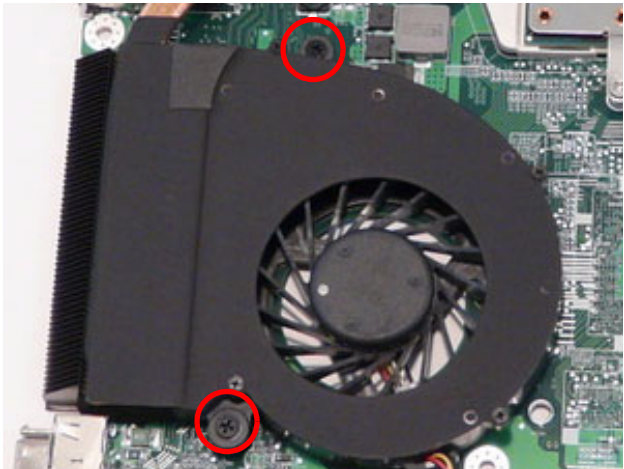


Step	Size	Quantity	Screw Type
Thermal Module Assembly	M2.5*5	2	

4. Connect the fan cable as shown.

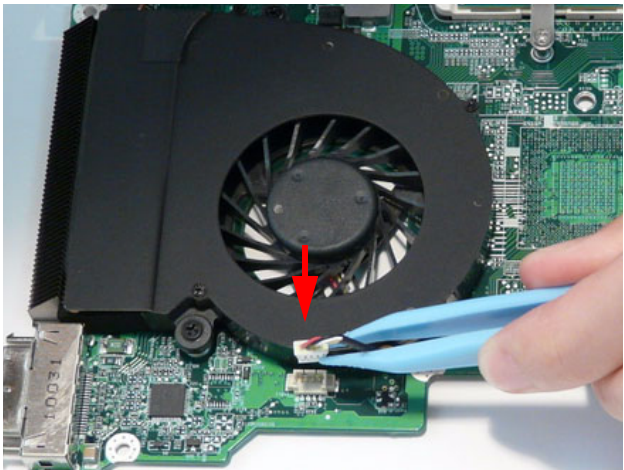


Replacing the PCH Heatsink

1. Place the PCH heatsink onto the mainboard as shown.

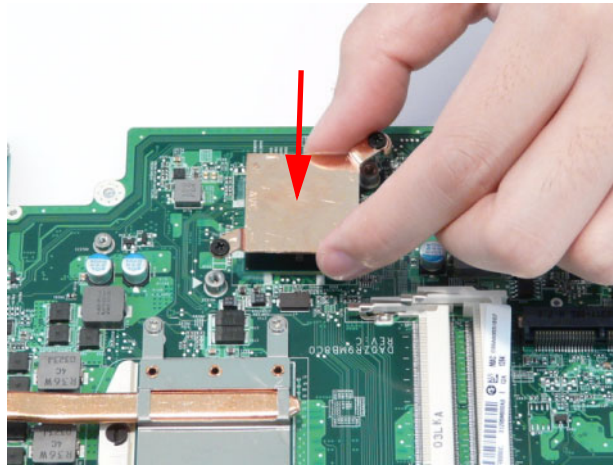


2. Tighten two (2) captive screws.

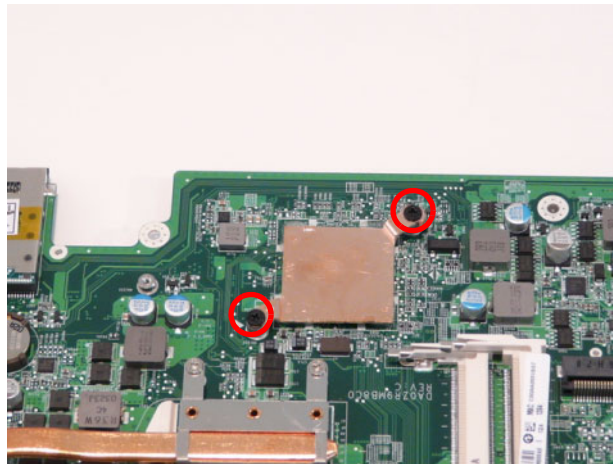


Replacing the RTC Battery

1. Place the RTC battery into its socket on the mainboard.

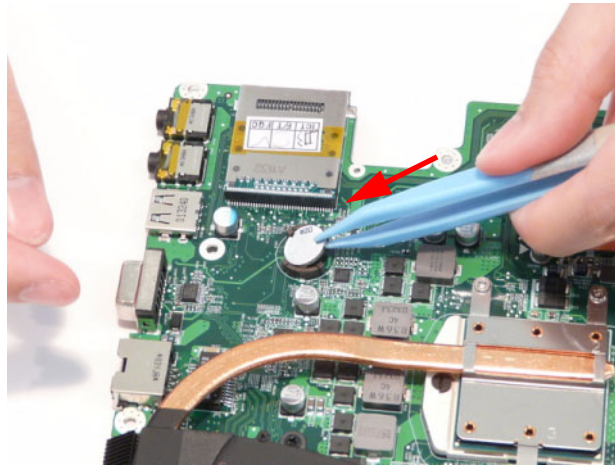


2. Apply gentle pressure to fix the RTC battery in place.

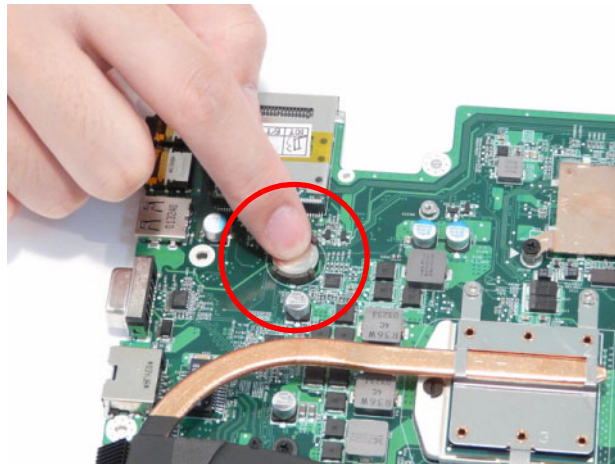


Removing the Mainboard

- 1. Pull back the speaker cable and place the Mainboard left side first and lower it into the chassis.

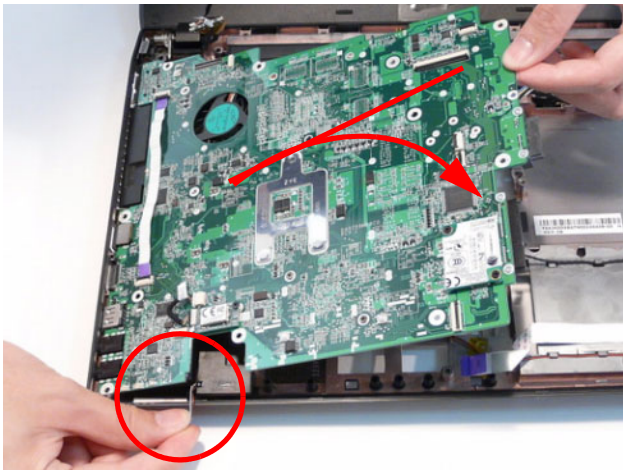


- 2. Replace two (2) screws.

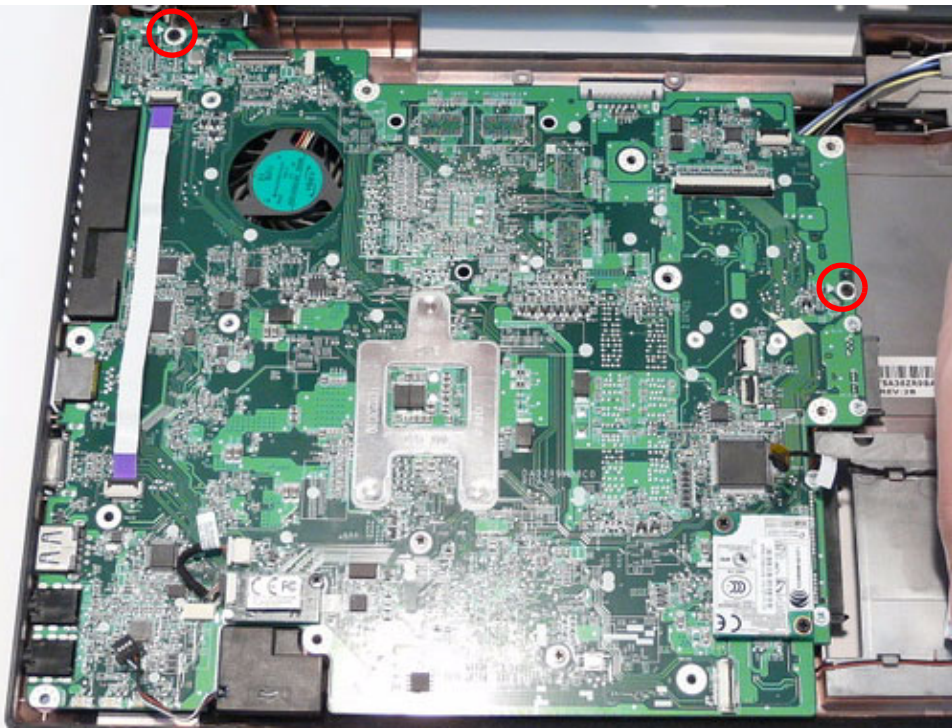


Step	Size	Quantity	Screw Type
Mainboard Assembly	M2.5*5	2	

3. Connect the camera cable to the mainboard.

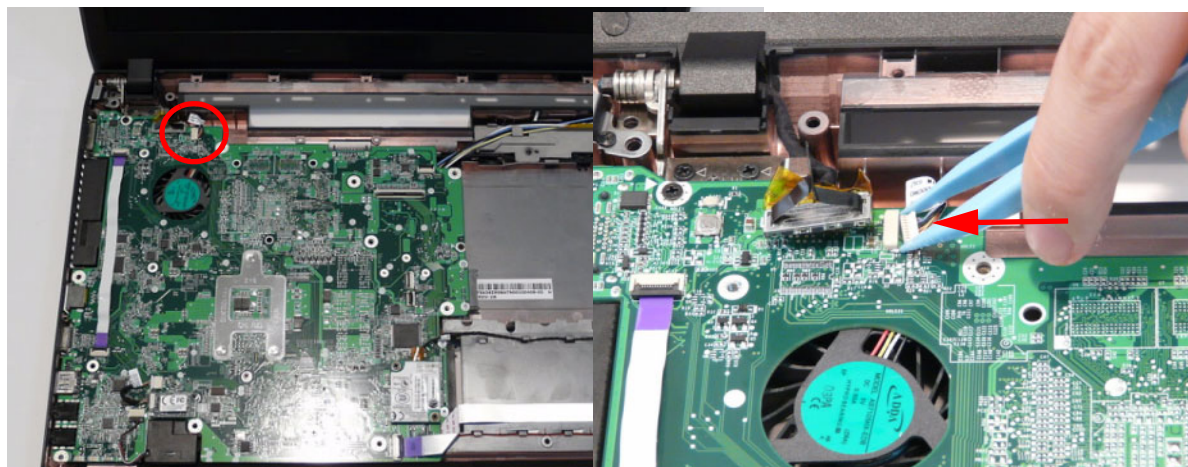

4. Connect the LVDS cable to the mainboard.

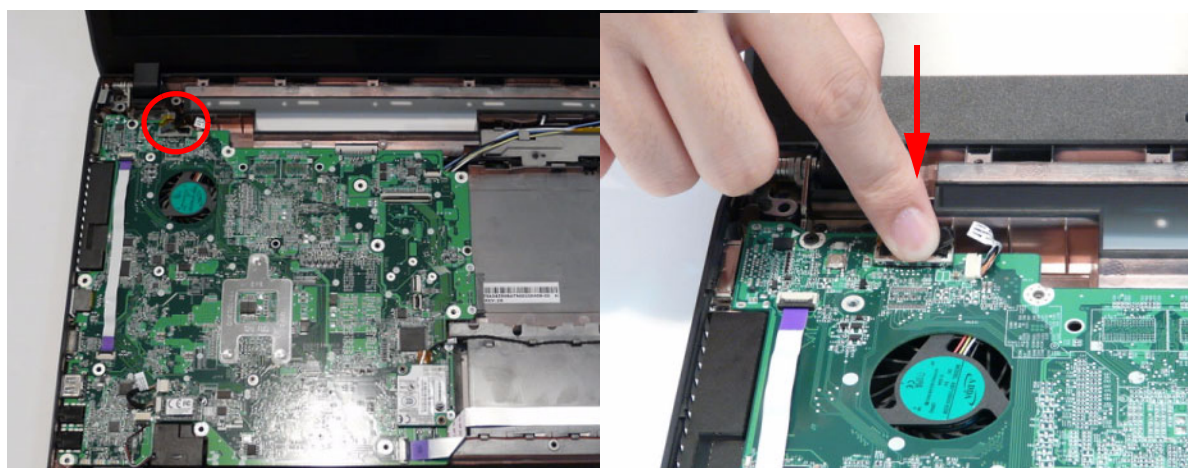


5. Turn the computer over and connect the DC-In cable.




Replacing the Speaker FCC


1. Connect and lock the speaker FCC to the mainboard.

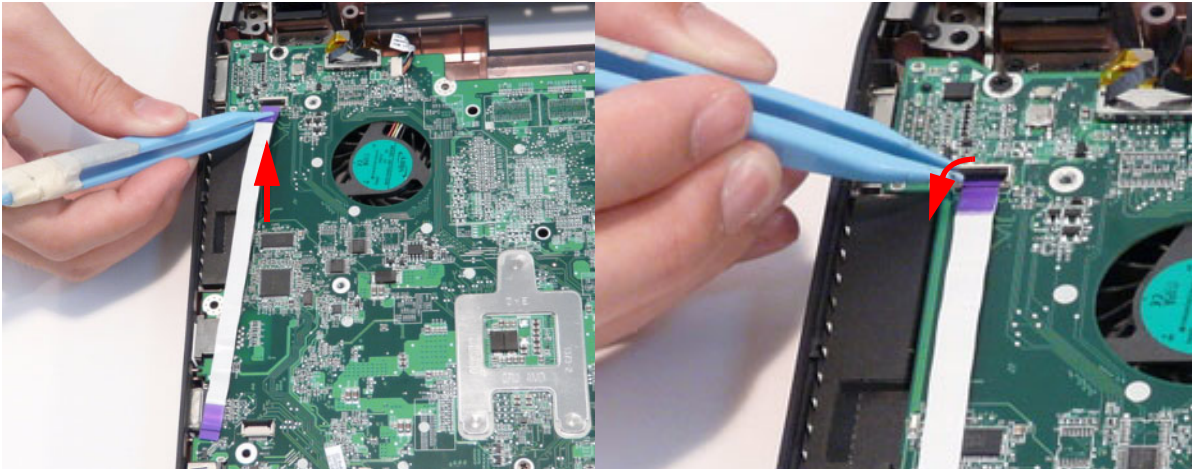

2. Apply gentle pressure to the FFC to fix it to the mainboard.

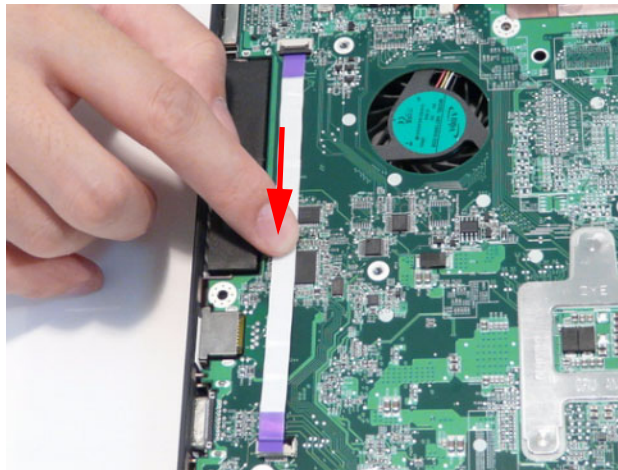


3. Connect and lock the speaker FCC to the mainboard.

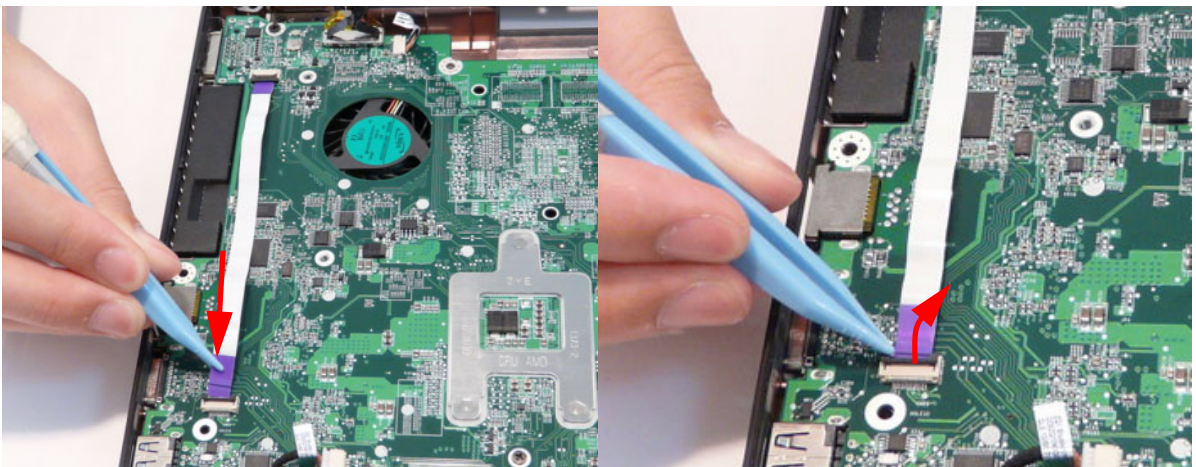


Replacing the Bluetooth Module

1. Place the Bluetooth board onto the mainboard by aligning the guide pin.

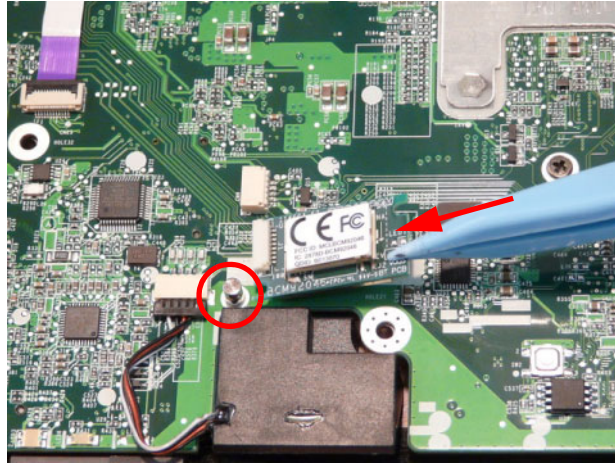


2. Remove the single securing screw from the Bluetooth board.

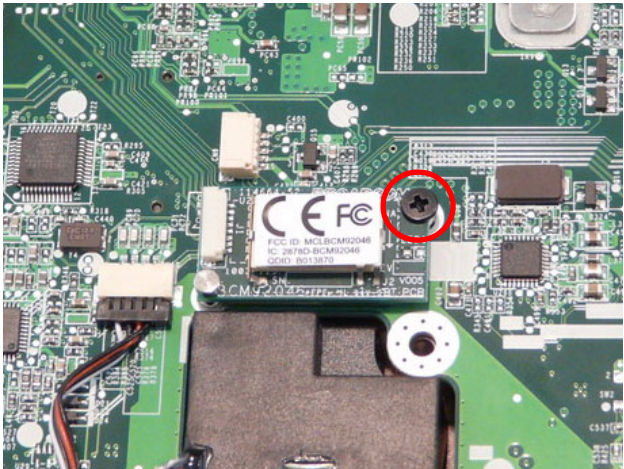


Step	Size	Quantity	Screw Type
Bluetooth Board Disassembly	M2.0*3	1	

3. Connect the Bluetooth cable to the Bluetooth board.

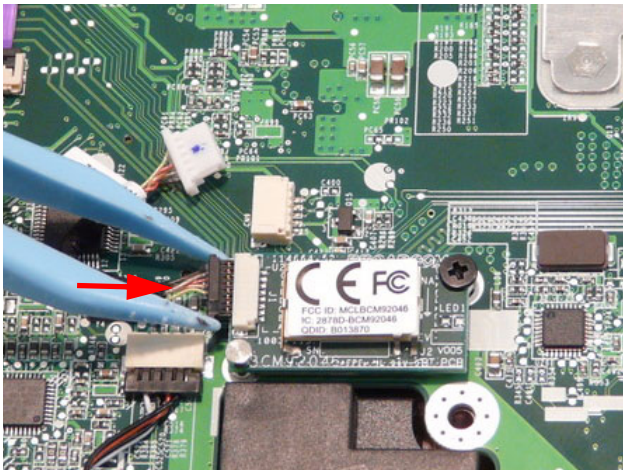


4. Connect the Bluetooth cable to the mainboard.

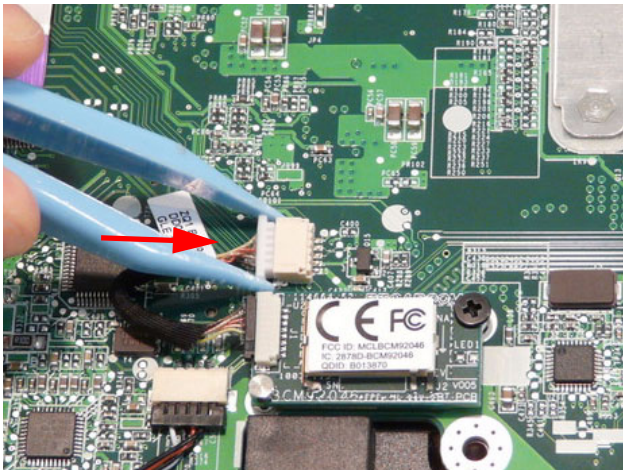


Replacing the Modem Module

- 1. Place the modem board onto the mainboard by aligning it with the socket on the mainboard.

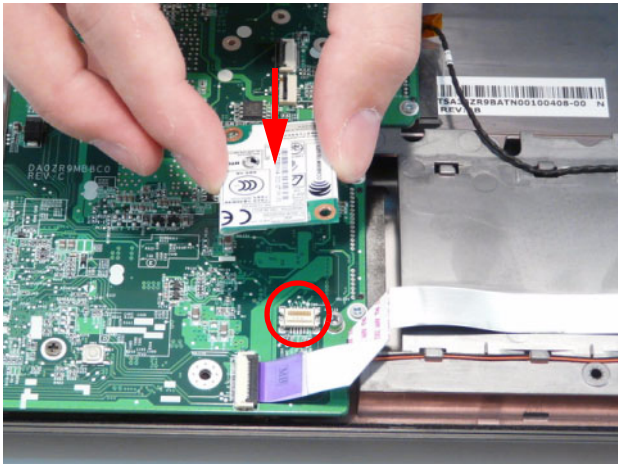


- 2. Replace two (2) screws.

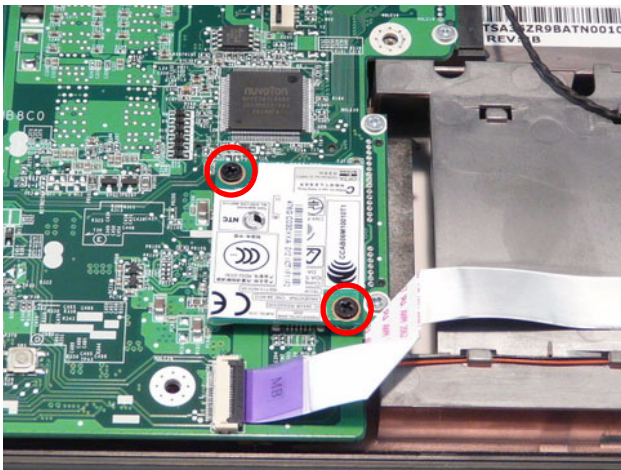


Step	Size	Quantity	Screw Type
Modem Board Assembly	M2.5*3	2	

-
3. Using plastic tweezers, connect the modem cable to the modem board.

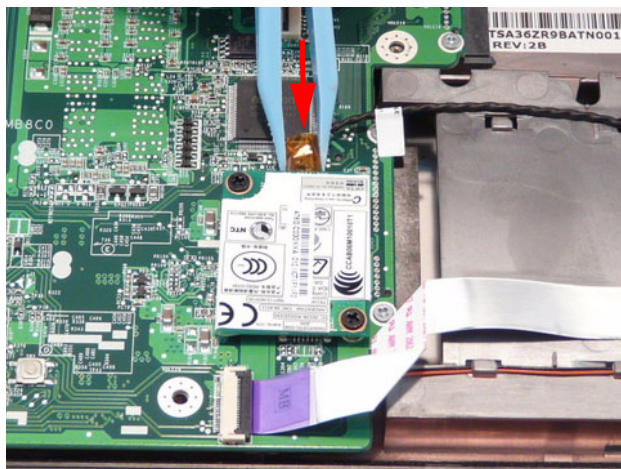


Replacing the USB Board

- 1. Place the USB Board into the chassis as shown.

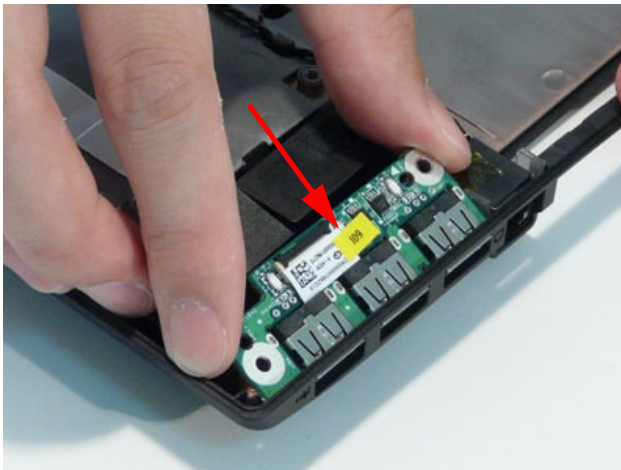


- 2. Replace one (1) screw.

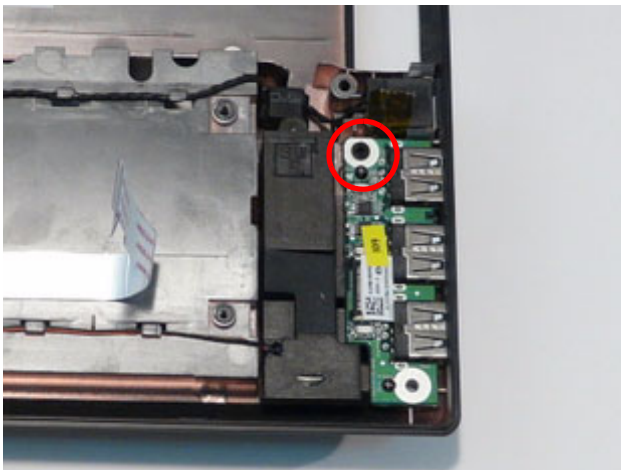


Step	Size	Quantity	Screw Type
USB Board Assembly	M2.5*5	1	


- 3. Connect and lock the USB FFC from the mainboard.

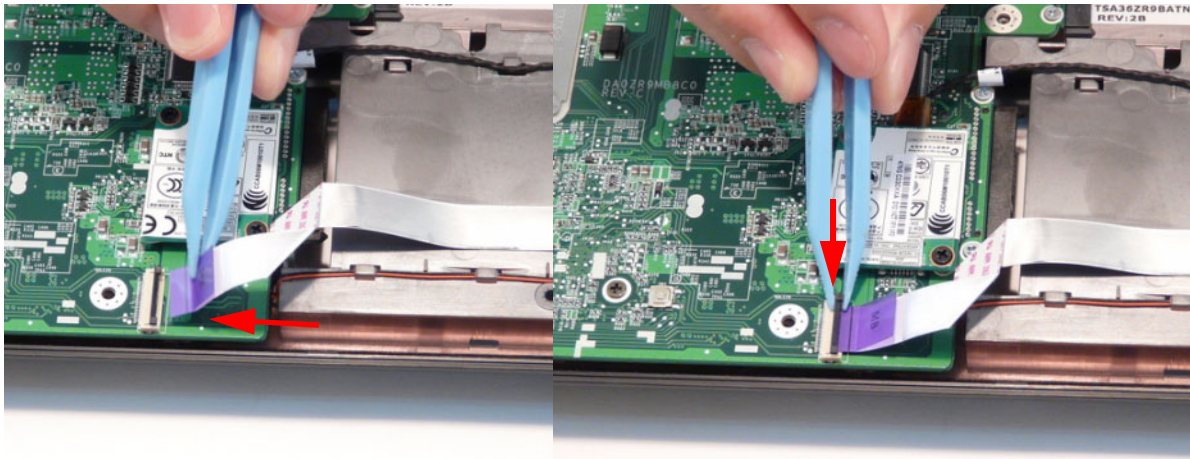

-
4. Apply gentle pressure to the FFC to adhere it to the chassis.

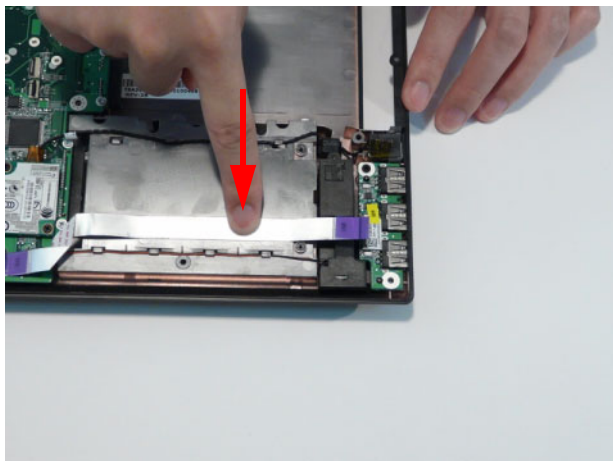


5. Connect and lock the USB FFC to the USB board.

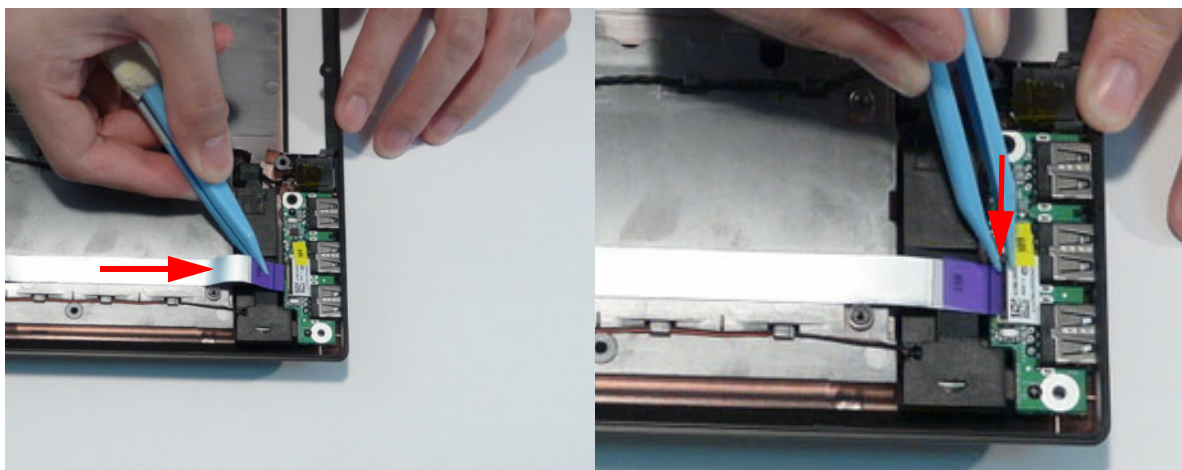


Replacing the Fingerprint Board


- 1. Place the fingerprint board onto the upper cover as shown.

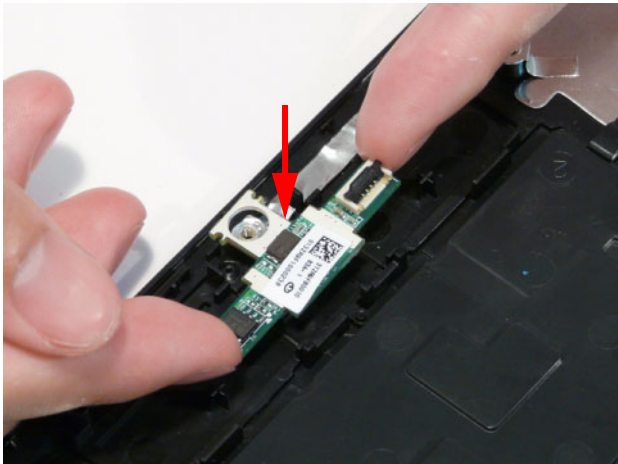

- 1. Slide the bracket at an angle into the guides and lower it onto the upper cover.

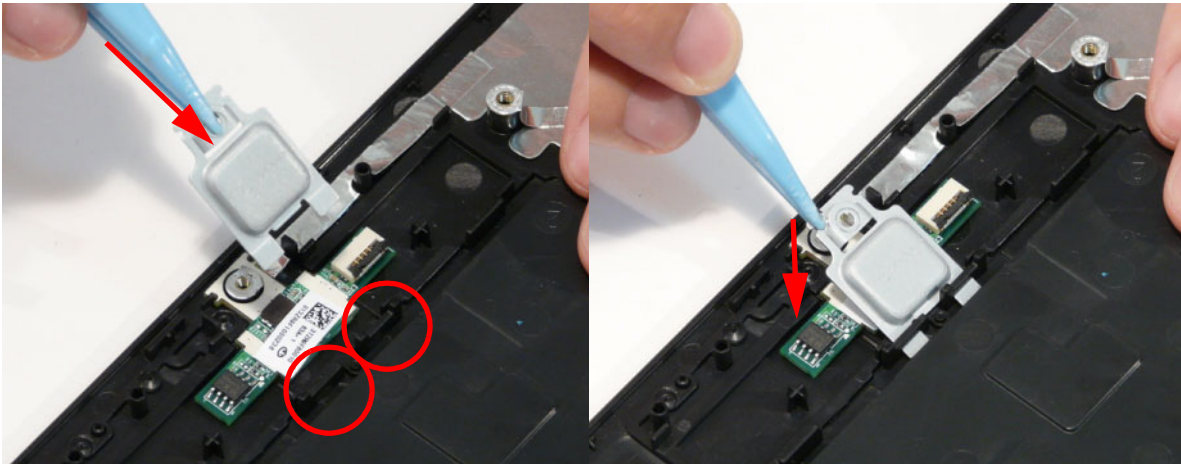


- 2. Replace one (1) screw.

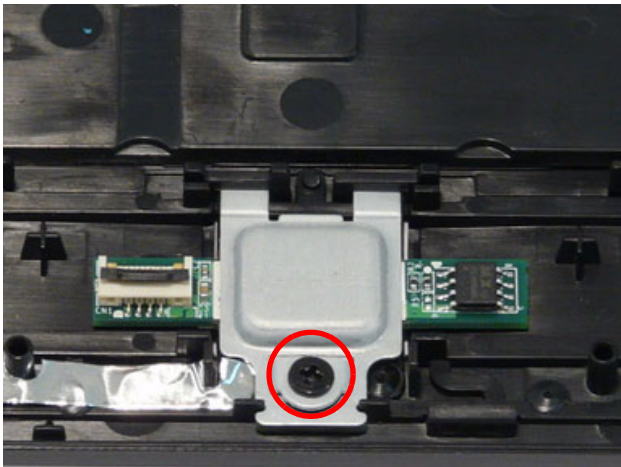


Step	Size	Quantity	Screw Type
Fingerprint Board Assembly	M2.0*3	1	

3. Connect and lock the fingerprint FFC to the fingerprint board.

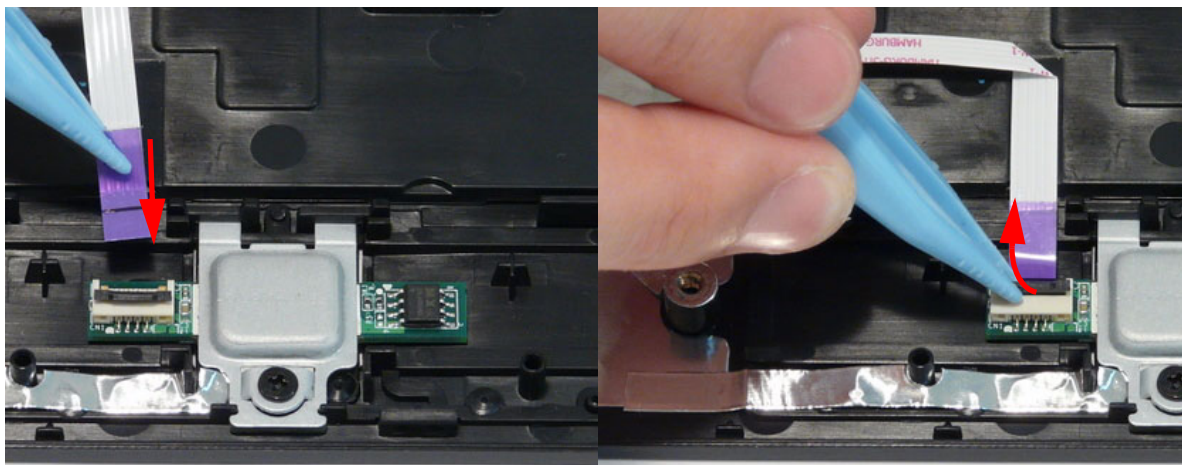


4. Lift the black mylar as shown and apply gentle pressure to the fingerprint FFC to adhere it to the upper cover.

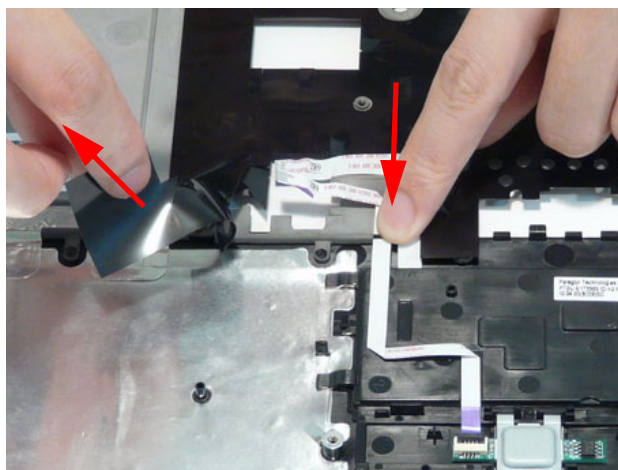


Removing the Power/WiFi Switch Board

- 1. Place the power board onto the Upper Cover.

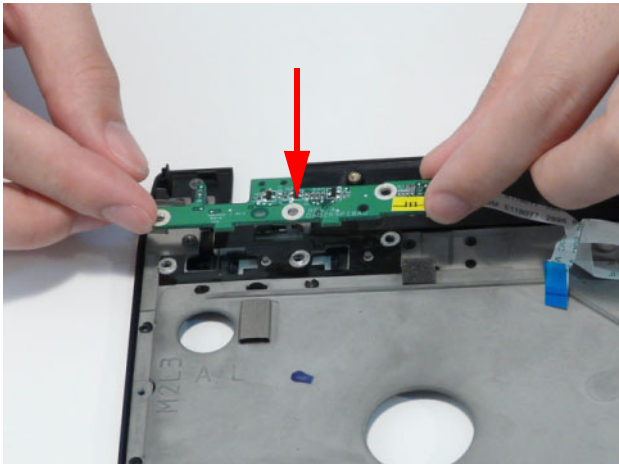


- 2. Replace three (3) screws.

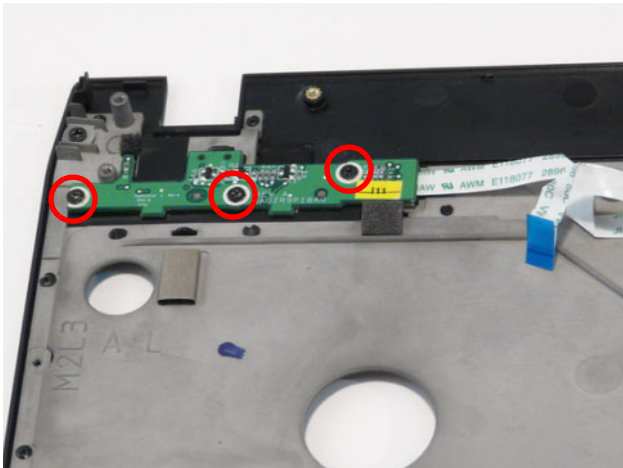

Step	Size	Quantity	Screw Type
Power/WiFi Board Assembly	2.5*4	3	

- 3. Press down on the FFC to adhere it to the upper cover.

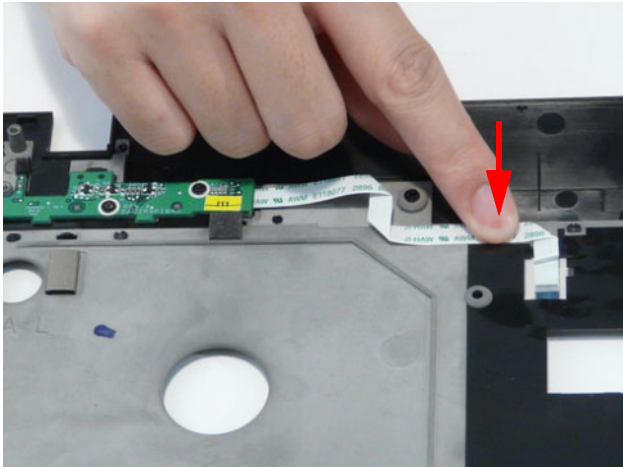


Removing the Upper Cover


1. Place the upper cover onto the chassis.




2. Starting at the bottom, press down on the upper cover to snap the securing latches in place.

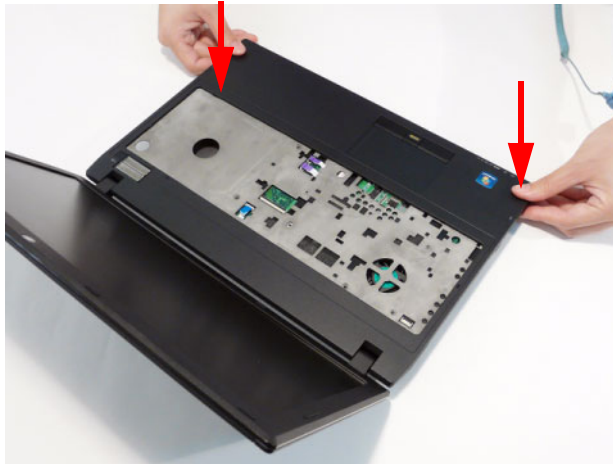

3. Press down on all the edges on the upper case to secure all the latches.

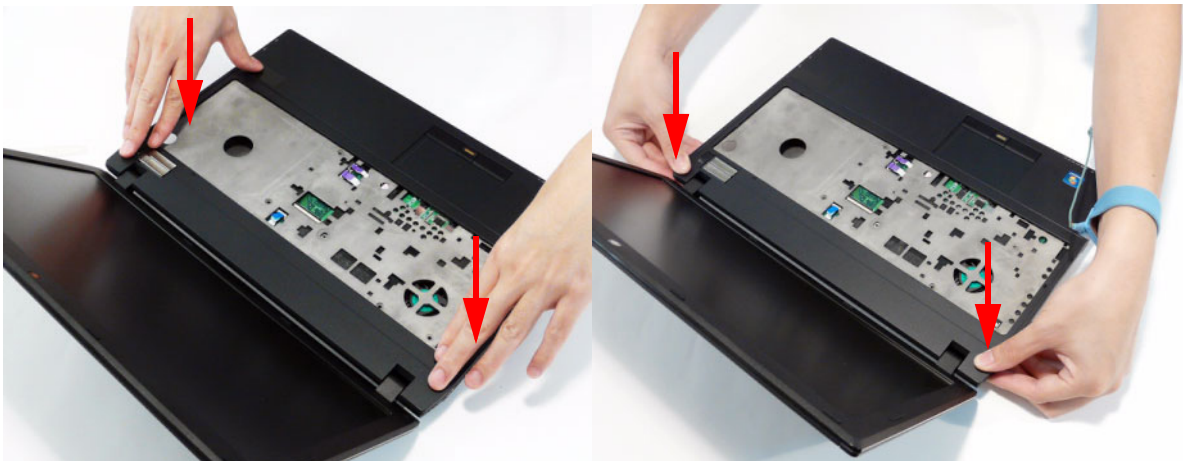


4. Replace five (5) screws.

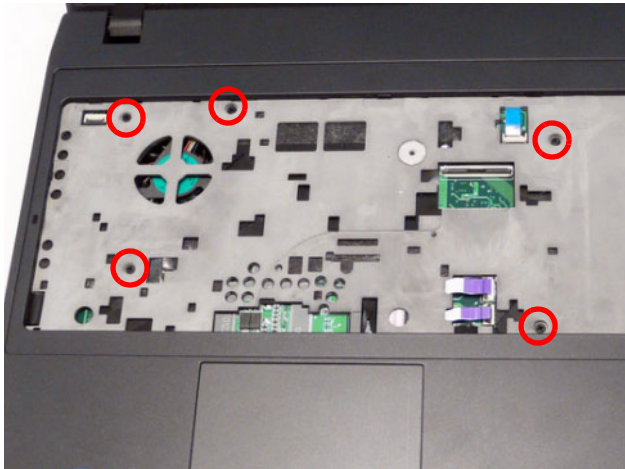


Step	Size	Quantity	Screw Type
Upper Cover Assembly	M2.5*5	5	

5. Connect the following 3 cables from the Mainboard:

- a. Power/WiFi board FFC
- b. Touchpad FFC
- c. Fingerprint FFC

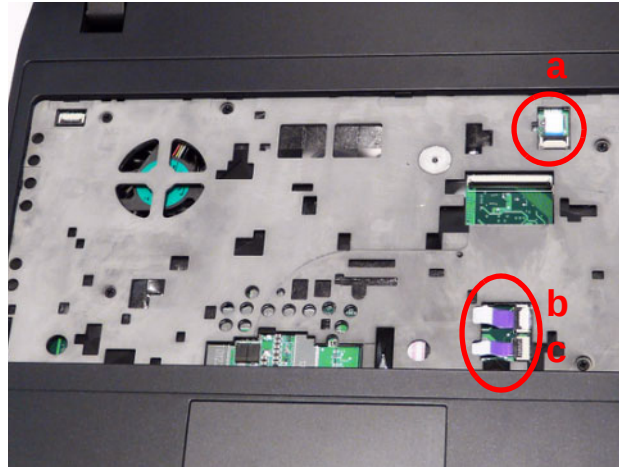


a) Connect and lock the Powerboard/WiFi FFC to the mainboard.

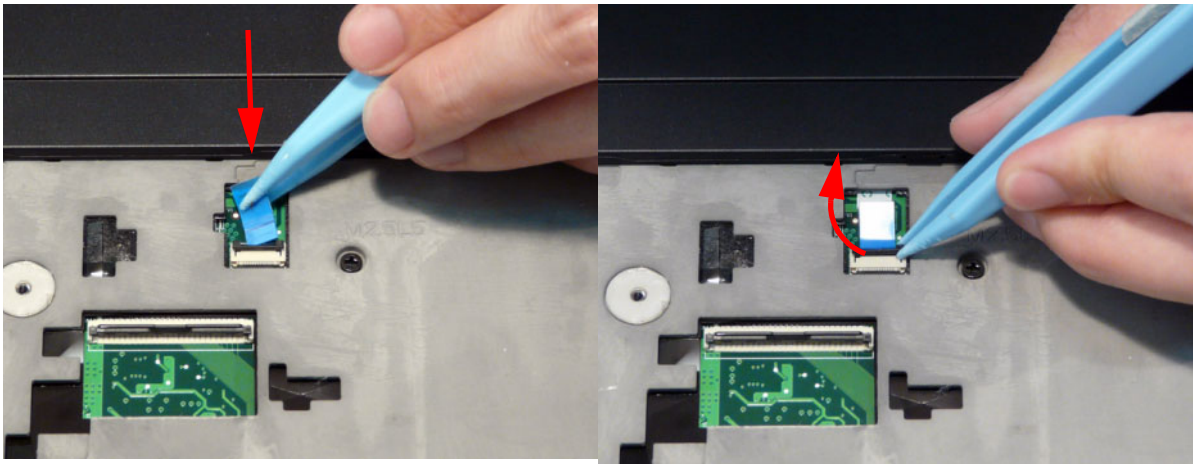


b) Connect and lock the Touchpad FFC to the mainboard.



c) Connect and lock the Fingerprint FFC to the mainboard.

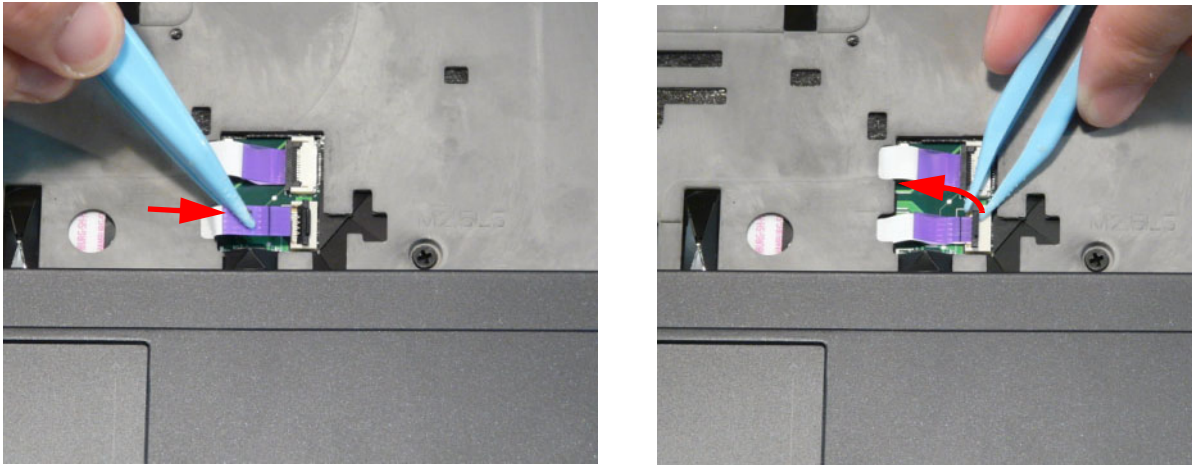

6. Replace the 24 securing screws from the lower cover.

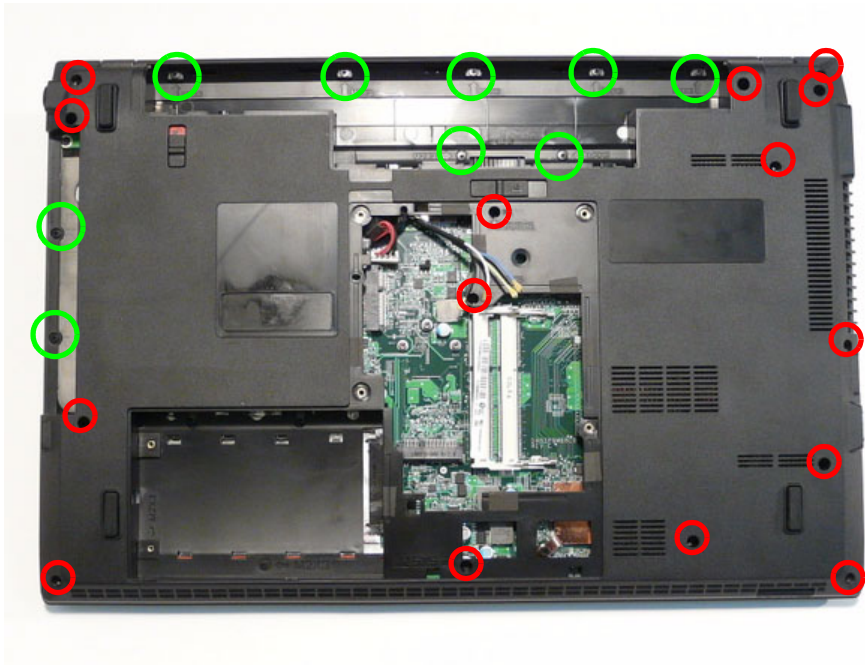


Step	Size	Quantity	Screw Type
Lower Cover (red callout)	M2.5*5	15	
Battery Bay (green callout)	M2.0*3	7	
ODD Bay (green callout)	M2.0*3	2	

Replacing the Keyboard

1. Place the keyboard face down on the palm rest



2. Connect and lock the keyboard FPC cable as shown.

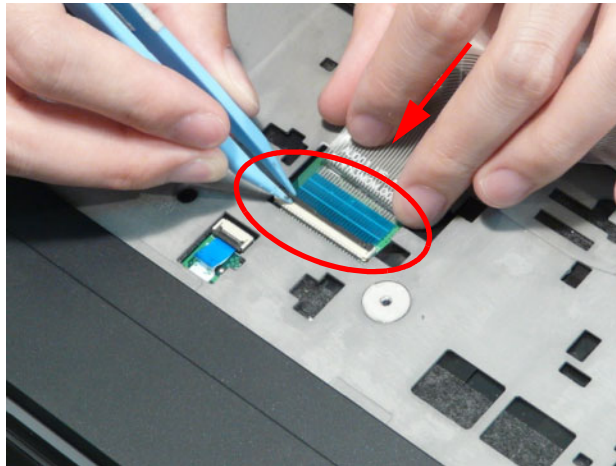

1. Turn the keyboard over and place it on the upper cover.




2. Press down on the keyboard to secure all the latches.



Replacing the Optical Drive Module

- 1. Place the ODD bracket onto the ODD module as shown.

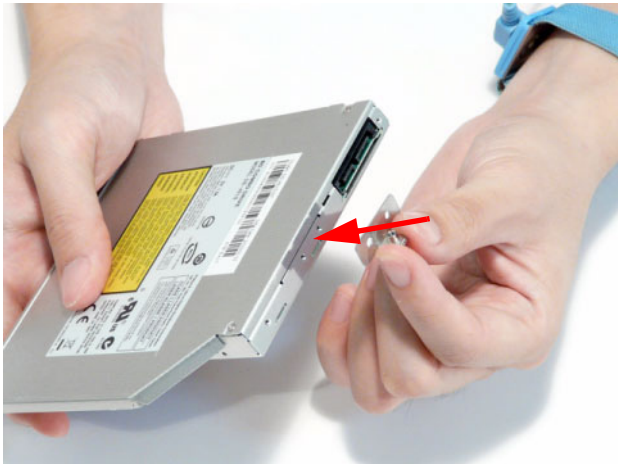

- 2. Replace two (2) screws.




Step	Size	Quantity	Screw Type
ODD Bracket Assembly	M2.0*3L	2	

3. Attach the ODD bezel to the ODD Module as shown.



4. Slide the ODD module into the chassis.

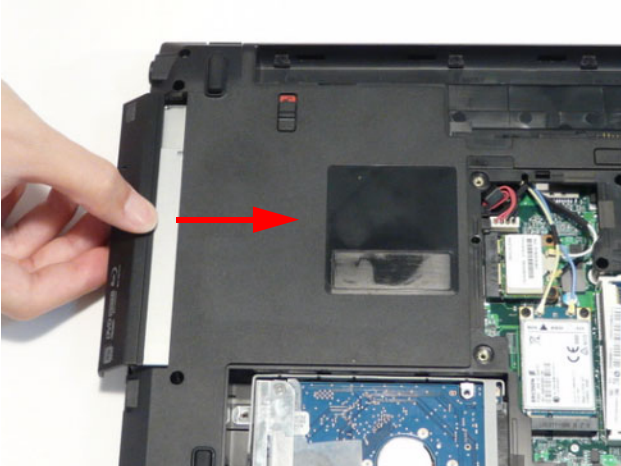


5. Replace one (1) screw.



Step	Size	Quantity	Screw Type
ODD Module Assembly	M2.5*3L	1	

Replacing the WLAN Module

- 1. Insert the 3G Board into the 3G socket.

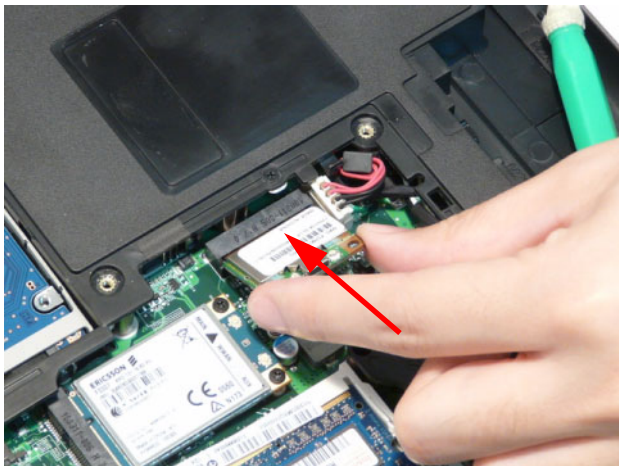


- 2. Replace one (1) screw.



Step	Size	Quantity	Screw Type
WLAN Board Assembly	M2.0*3	1	


3. Connect the two (2) cables to the WLAN Board.

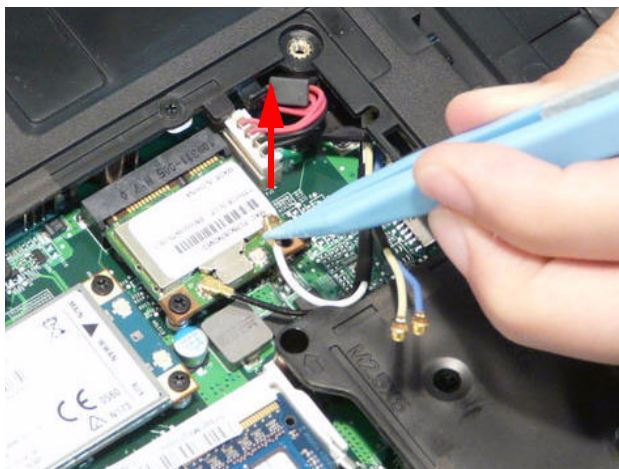

NOTE: Cable placement is as follows: White to J1(right), Black to J2(left).

Replacing the 3G Module


1. Insert the 3G board into the 3G socket.

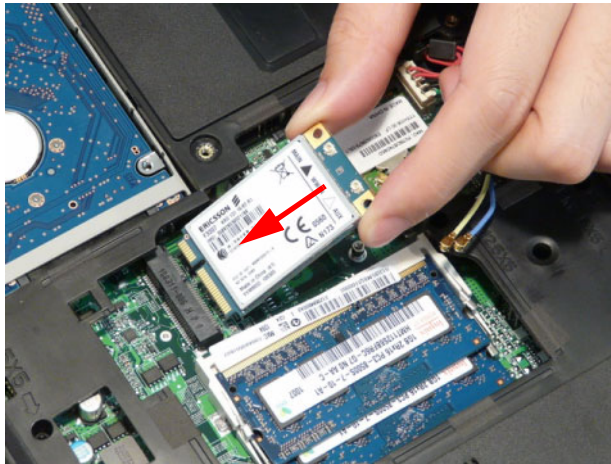

2. Connect the two (2) antenna cables to the 3G Board.



3. Replace two (2) screws.

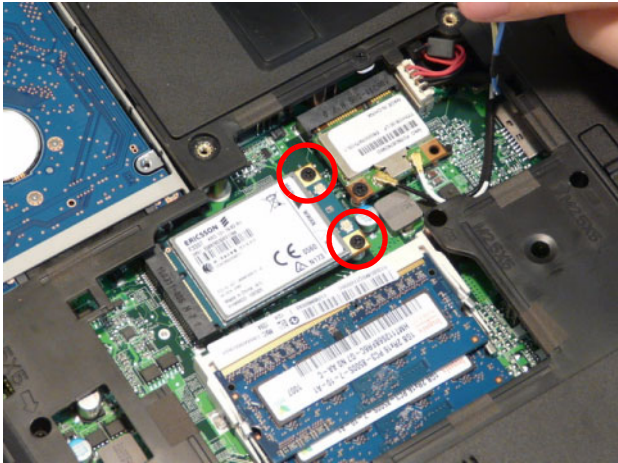

NOTE: Cable placement is as follows: Yellow to Main(top), Blue to Aux(bottom).


Step	Size	Quantity	Screw Type
3G Board Assembly	M2.0*3	2	

Replacing the DIMM Modules

1. Insert the DIMM module into the DIMM socket.




2. Push down on the DIMM module to secure it to the DIMM latches.

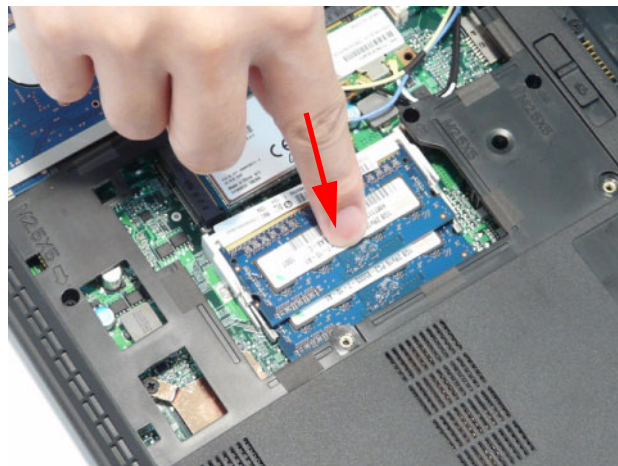


3. Repeat steps for the second DIMM module if present.

Removing the HDD Module

- 1. Place the bracket onto the HDD.

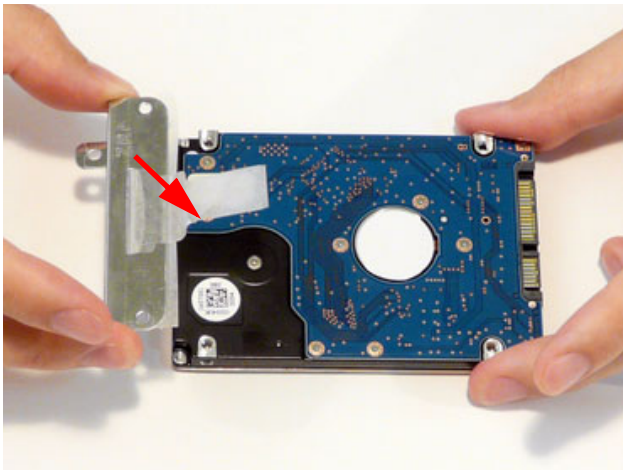


- 2. Replace two (2) screws.

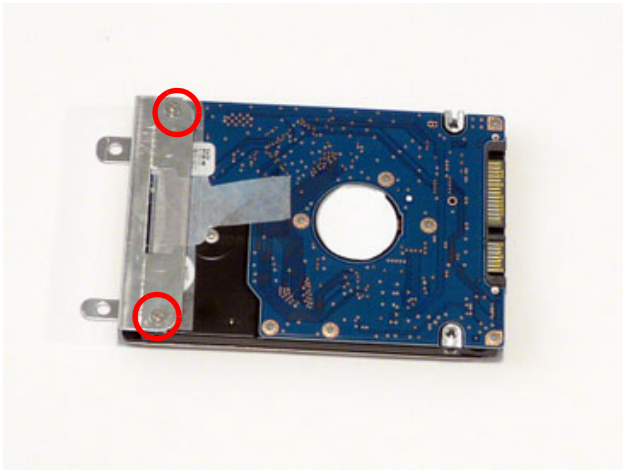


Step	Size	Quantity	Screw Type
HDD Bracket Assembly	M2.5*3Ni	2	


- 3. Pull the sides of the HDD case and insert the case latches into the HDD.

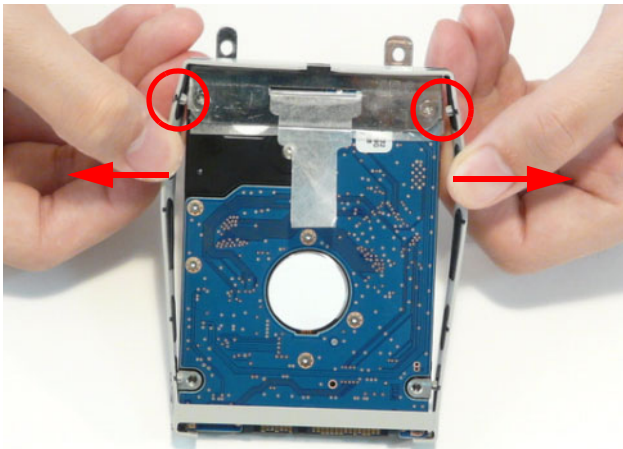


-
4. Lower the case onto the HDD.

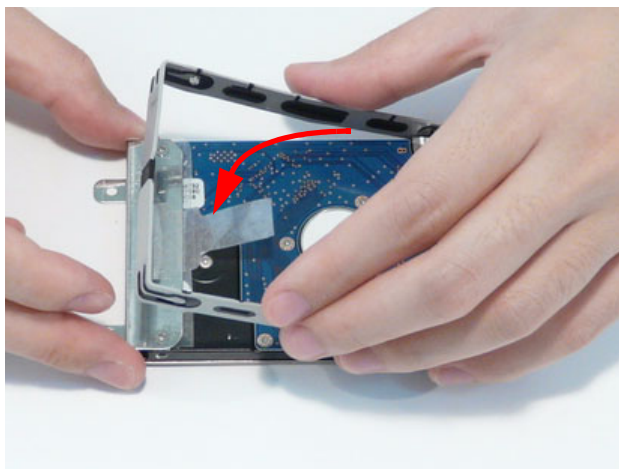


5. Place the HDD into the chassis as shown.

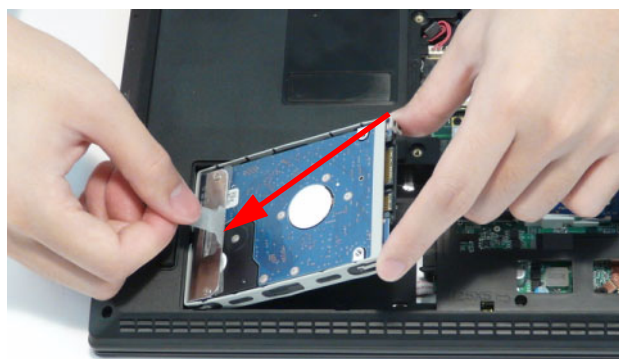

6. Slide the HDD Module in the direction of the arrow.

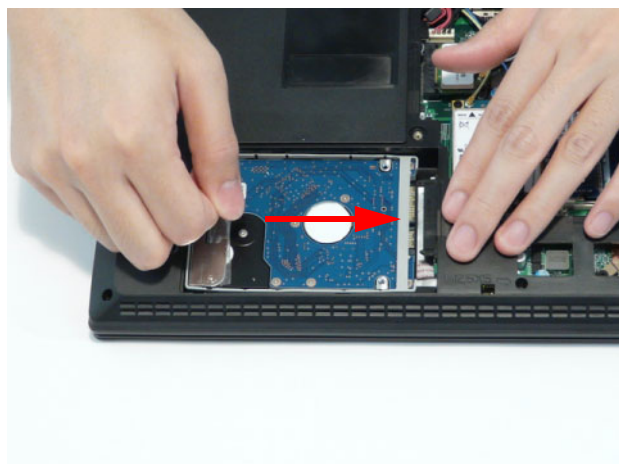


7. Replace one (1) screw.

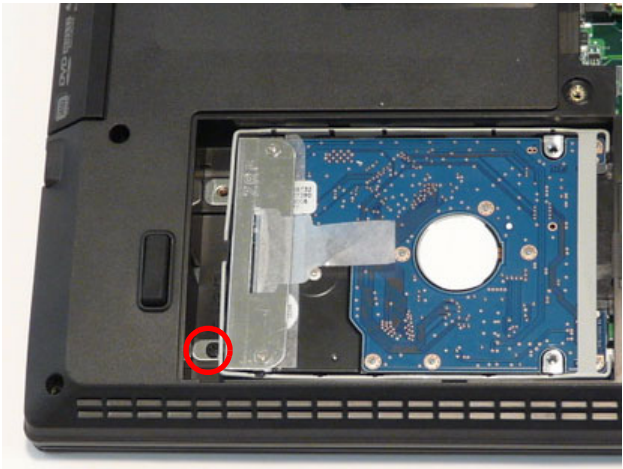


Step	Size	Quantity	Screw Type
HDD Assembly	M2X3	1	

Replacing the Lower Cover

1. Replace the lower cover as shown.

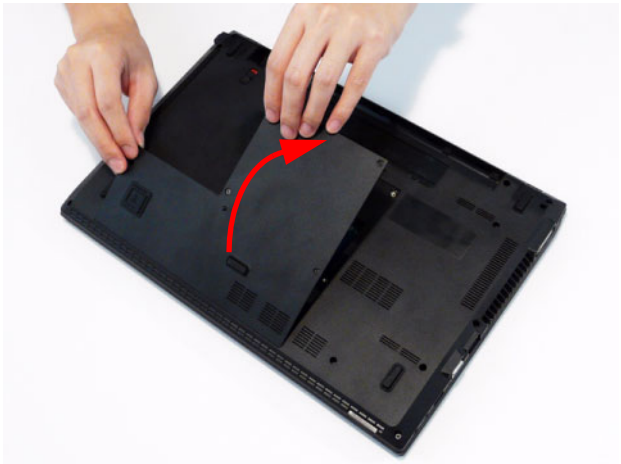

2. Screw four (4) captive screws and one (1) non-captive screw to the lower cover.

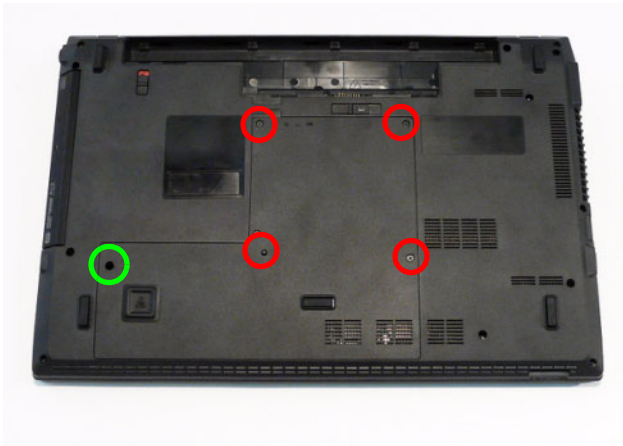

Step	Size	Quantity	Screw Type
Lower Cover Assembly (green callout)	M2.5*5	1	

Replacing the SD dummy card

1. Insert the SD card into slot.




2. Push the SD dummy card all the way in.




Replacing the Battery Pack

1. Insert the battery pack and press down.

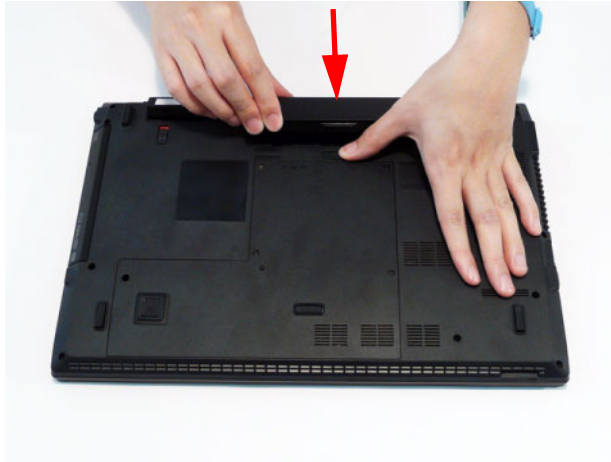

1. Slide the battery lock in the direction shown.

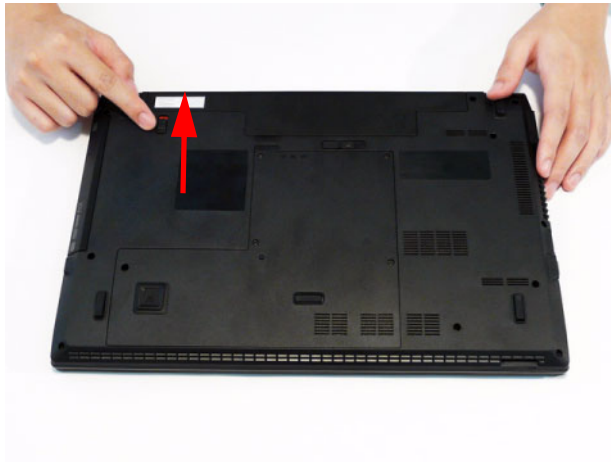

Troubleshooting

Common Problems

Use the following procedure as a guide for computer problems.

NOTE: The diagnostic tests are intended to test only Acer products. Non-Acer products, prototype cards, or modified options can give false errors and invalid system responses.


1. Obtain the failing symptoms in as much detail as possible.
2. Verify the symptoms by attempting to re-create the failure by running the diagnostic test or by repeating the same operation.
3. Use the following table with the verified symptom to determine which page to go to.

Symptoms (Verified)	Go To
Power On Issue	Page 140
No Display Issue	Page 141
LCD Failure	Page 143
Internal Keyboard Failure	Page 143
TouchPad Failure	Page 144
Internal Speaker Failure	Page 144
ODD Failure	Page 147
WLAN Failure	Page 150
Thermal Unit Failure	Page 150
Other Functions Failure	Page 151
Intermittent Failures	Page 152
Undermined Failures	Page 152

4. If the Issue is still not resolved, see "Online Support Information" on page 313.

Power On Issue

If the system doesn't power on, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

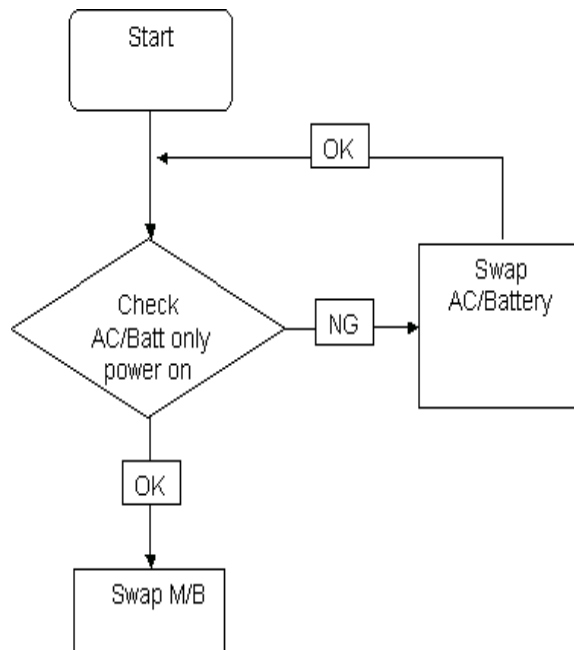


Computer Shutdown Intermittently

If the system powers off at intervals, perform the following actions one at a time to correct the problem.

1. Check the power cable is properly connected to the computer and the electrical outlet.
2. Remove any extension cables between the computer and the outlet.
3. Remove any surge protectors between the computer and the electrical outlet. Plug the computer directly into a known good electrical outlet.
4. Disconnect the power and open the casing to check the Thermal Unit (see "Thermal Unit Failure" on page 150) and fan airways are free of obstructions.
5. Remove all external and non-essential hardware connected to the computer that are not necessary to boot the computer to the failure point.
6. Remove any recently installed software.
7. If the Issue is still not resolved, see "Online Support Information" on page 313.

No Display Issue

If the **Display** doesn't work, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

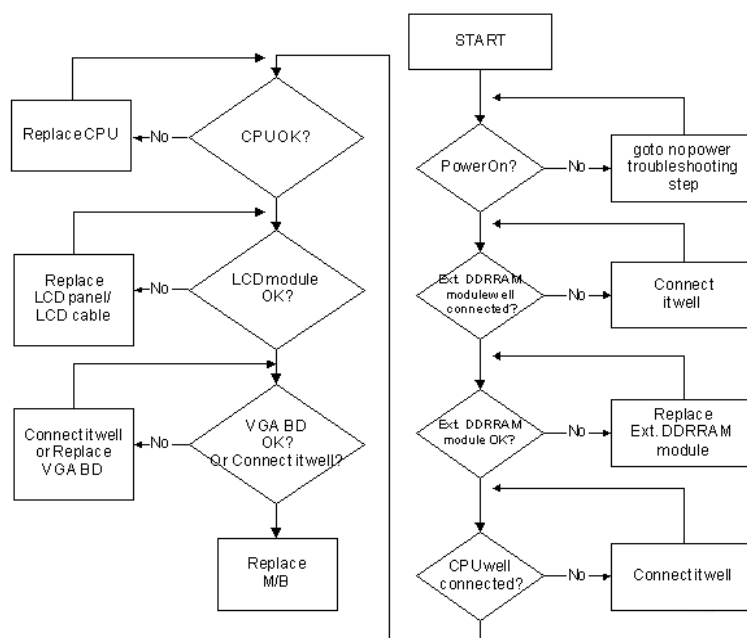

No POST or Video

If the POST or video doesn't display, perform the following actions one at a time to correct the problem.

1. Make sure that the internal display is selected. On this notebook model, switching between the internal display and the external display is done by pressing **Fn+F5**. Reference Product pages for specific model procedures.
2. Make sure the computer has power by checking at least one of the following occurs:
 - Fans start up
 - Status LEDs light up

If there is no power, see “Power On Issue” on page 140.

3. Drain any stored power by removing the power cable and battery and holding down the power button for 10 seconds. Reconnect the power and reboot the computer.
4. Connect an external monitor to the computer and switch between the internal display and the external display is by pressing **Fn+F5** (on this model).

If the POST or video appears on the external display, see “LCD Failure” on page 143.

5. Disconnect power and all external devices including port replicators or docking stations. Remove any memory cards and CD/DVD discs. Restart the computer.

If the computer boots correctly, add the devices one by one until the failure point is discovered.

6. Reseat the memory modules.
7. Remove the drives (see “Disassembly Process” on page 46).
8. If the Issue is still not resolved, see “Online Support Information” on page 313.

Abnormal Video Display

If video displays abnormally, perform the following actions one at a time to correct the problem.

1. Reboot the computer.
2. If permanent vertical/horizontal lines or dark spots display in the same location, the LCD is faulty and should be replaced. See “Disassembly Process” on page 46.
3. If extensive pixel damage is present (different colored spots in the same locations on the screen), the LCD is faulty and should be replaced. See “Disassembly Process” on page 46.
4. Adjust the brightness to its highest level. See the User Manual for instructions on adjusting settings.
NOTE: Ensure that the computer is not running on battery alone as this may reduce display brightness.
If the display is too dim at the highest brightness setting, the LCD is faulty and should be replaced. See “LCD Module Disassembly Process” on page 88.
5. Check the display resolution is correctly configured:
 - a. Minimize or close all Windows.
 - b. If display size is only abnormal in an application, check the view settings and control/mouse wheel zoom feature in the application.
 - c. If desktop display resolution is not normal, right-click on the desktop and select **Personalize**→ **Display Settings**.
 - d. Click and drag the Resolution slider to the desired resolution.
 - e. Click **Apply** and check the display. Readjust if necessary.
6. Roll back the video driver to the previous version if updated.
7. Remove and reinstall the video driver.
8. Check the Device Manager to determine that:
 - The device is properly installed. There are no red Xs or yellow exclamation marks.
 - There are no device conflicts.
 - No hardware is listed under Other Devices.
9. If the Issue is still not resolved, see “Online Support Information” on page 313.
10. Run the Windows Memory Diagnostic from the operating system DVD and follow the onscreen prompts.
11. If the Issue is still not resolved, see “This is a Blank chapter page.” on page Blank.


Random Loss of BIOS Settings

If the computer is experiencing intermittent loss of BIOS information, perform the following actions one at a time to correct the problem.

1. If the computer is more than one year old, replace the CMOS battery.
2. Run a complete virus scan using up-to-date software to ensure the computer is virus free.
3. If the computer is experiencing HDD or ODD BIOS information loss, disconnect and reconnect the power and data cables between devices.
If the BIOS settings are still lost, replace the cables.
4. If HDD information is missing from the BIOS, the drive may be defective and should be replaced.
5. Replace the Motherboard.
6. If the Issue is still not resolved, see “Online Support Information” on page 313.


LCD Failure

If the **LCD** fails, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

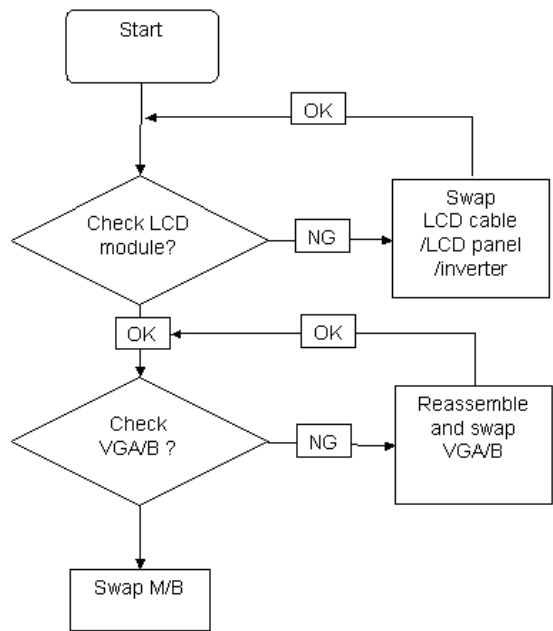


Built-In Keyboard Failure

If the built-in **Keyboard** fails, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

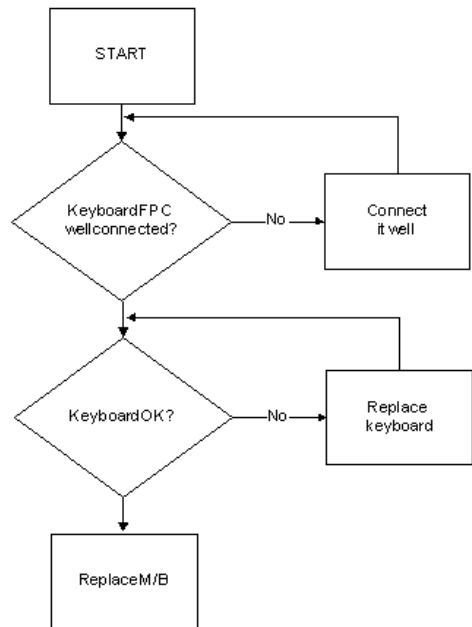


TouchPad Failure

If the **TouchPad** doesn't work, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

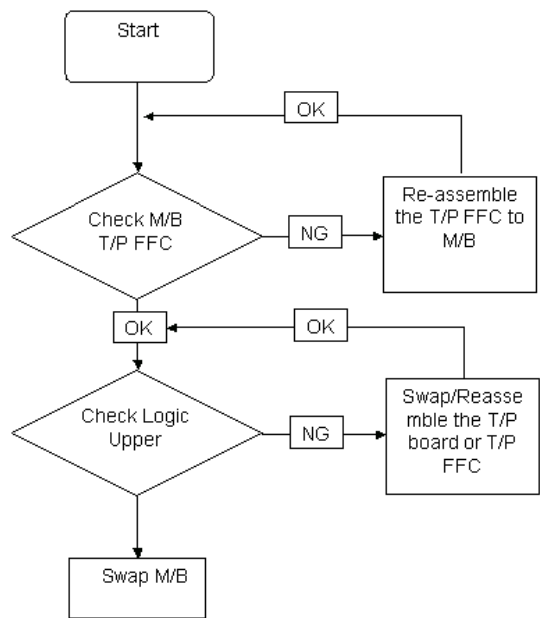

Internal Speaker Failure

If the internal **Speakers** fail, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

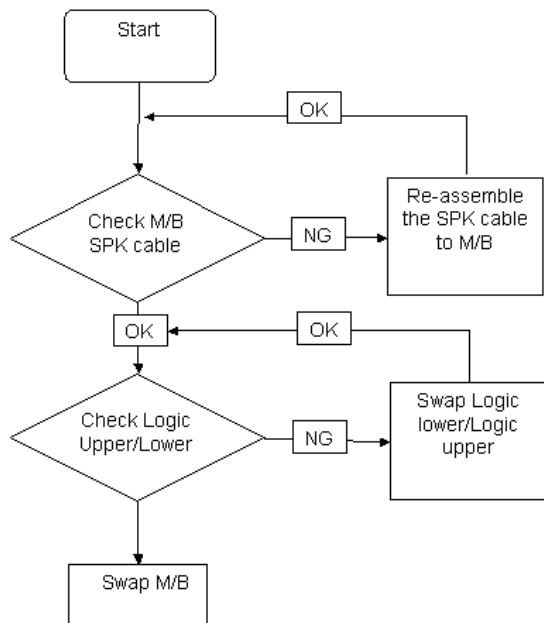

Sound Problems

If sound problems are experienced, perform the following actions one at a time to correct the problem.

1. Reboot the computer.
2. Navigate to **Start→ Control Panel→ System and Maintenance→ System→ Device Manager**. Check the Device Manager to determine that:
 - The device is properly installed.
 - There are no red Xs or yellow exclamation marks.
 - There are no device conflicts.
 - No hardware is listed under Other Devices.
3. Roll back the audio driver to the previous version, if updated recently.
4. Remove and reinstall the audio driver.
5. Ensure that all volume controls are set mid range:
 - a. Click the volume icon on the taskbar and drag the slider to 50. Ensure that the volume is not muted.
 - b. Click Mixer to verify that other audio applications are set to 50 and not muted.
6. Navigate to **Start→ Control Panel→ Hardware and Sound→ Sound**. Ensure that Speakers are selected as the default audio device (green check mark).

NOTE: If Speakers does not show, right-click on the **Playback** tab and select **Show Disabled Devices** (clear by default).
7. Select Speakers and click **Configure** to start **Speaker Setup**. Follow the onscreen prompts to configure the speakers.
8. Remove and recently installed hardware or software.
9. Restore system and file settings from a known good date using **System Restore**.

If the issue is not fixed, repeat the preceding steps and select an earlier time and date.
10. Reinstall the Operating System.
11. If the Issue is still not resolved, see “Online Support Information” on page 313.

Microphone Problems

If internal or external **Microphones** do not operate correctly, perform the following actions one at a time to correct the problem.

1. Check that the microphone is enabled. Navigate to **Start→ Control Panel→ Hardware and Sound→ Sound** and select the **Recording** tab.
2. Right-click on the **Recording** tab and select **Show Disabled Devices** (clear by default).
3. The microphone appears on the **Recording** tab.
4. Right-click on the microphone and select **Enable**.
5. Select the microphone then click **Properties**. Select the **Levels** tab.
6. Increase the volume to the maximum setting and click **OK**.
7. Test the microphone hardware:
 - a. Select the microphone and click **Configure**.
 - b. Select **Set up microphone**.
 - c. Select the microphone type from the list and click **Next**.
 - d. Follow the onscreen prompts to complete the test.
8. If the Issue is still not resolved, see “Online Support Information” on page 313.

HDD Not Operating Correctly

If the **HDD** does not operate correctly, perform the following actions one at a time to correct the problem.

1. Disconnect all external devices.
2. Run a complete virus scan using up-to-date software to ensure the computer is virus free.
3. Run the Windows 7 Startup Repair Utility:
 - a. insert the Windows 7 Operating System DVD in the ODD and restart the computer.
 - b. When prompted, press any key to start to the operating system DVD.
 - c. The **Install Windows** screen displays. Click **Next**.
 - d. Select **Repair your computer**.
 - e. The **System Recovery Options** screen displays. Click **Next**.
 - f. Select the appropriate operating system, and click **Next**.

NOTE: Click **Load Drivers** if controller drives are required.

- g. Select **Startup Repair**.
- h. Startup Repair attempts to locate and resolve issues with the computer.
- i. When complete, click **Finish**.


If an issue is discovered, follow the onscreen information to resolve the problem.

4. Run the Windows Memory Diagnostic Tool. For more information see Windows Help and Support.
5. Restart the computer and press F2 to enter the BIOS Utility. Check the BIOS settings are correct and that CD/DVD drive is set as the first boot device on the Boot menu.
6. Ensure all cables and jumpers on the HDD and ODD are set correctly.
7. Remove any recently added hardware and associated software.
8. Run the Windows Disk Defragmenter. For more information see Windows Help and Support.
9. Run Windows Check Disk by entering **chkdsk /r** from a command prompt. For more information see Windows Help and Support.
10. Restore system and file settings from a known good date using **System Restore**.

If the issue is not fixed, repeat the preceding steps and select an earlier time and date.
11. Replace the HDD. See "Main Unit Disassembly Process" on page 60.

ODD Failure

If the **ODD** fails, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

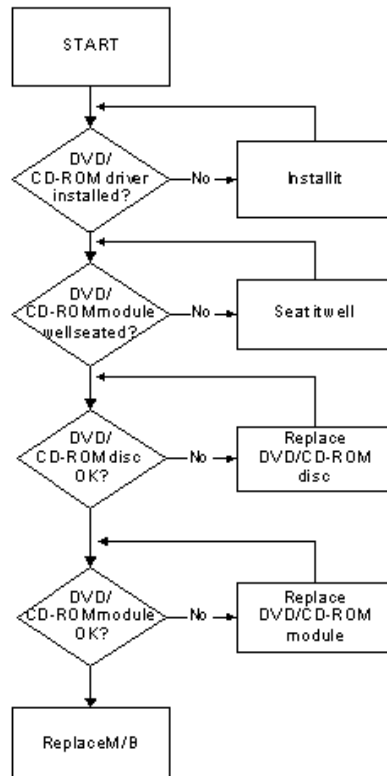

ODD Not Operating Correctly

If the **ODD** exhibits any of the following symptoms it may be faulty:

- Audio CDs do not play when loaded
- DVDs do not play when loaded
- Blank discs do not burn correctly
- DVD or CD play breaks up or jumps
- Optical drive not found or not active:
 - Not shown in My Computer or the BIOS setup
 - LED does not flash when the computer starts up
 - The tray does not eject
- Access failure screen displays
- The ODD is noisy

Perform the following general solutions one at a time to correct the problem.

1. Reboot the computer and retry the operation.
2. Try an alternate disc.
3. Navigate to **Start** → **Computer**. Check that the ODD device is displayed in the **Devices with Removable Storage** panel.
4. Navigate to **Start** → **Control Panel** → **System and Maintenance** → **System** → **Device Manager**.

- a. Double-click **IDE ATA/ATAPI controllers**. If a device displays a down arrow, right-click on the device and click **Enable**.
- b. Double-click **DVD/CD-ROM drives**. If the device displays a down arrow, right-click on the device and click **Enable**.
- c. Check that there are no yellow exclamation marks against the items in **IDE ATA/ATAPI controllers**. If a device has an exclamation mark, right-click on the device and uninstall and reinstall the driver.
- d. Check that there are no yellow exclamation marks against the items in **DVD/CD-ROM drives**. If a device has an exclamation mark, right-click on the device and uninstall and reinstall the driver.
- e. If the exclamation marker is not removed from the item in the lists, try removing any recently installed software and retrying the operation.

Discs Do Not Play

If discs do not play when inserted in the drive, perform the following actions one at a time to correct the problem.

1. Check that the disc is correctly seated in the drive tray and that the label on the disc is visible.
2. Check that the media is clean and scratch free.
3. Try an alternate disc in the drive.
4. Ensure that **AutoPlay** is enabled:
 - a. Navigate to **Start**→ **Control Panel**→ **Hardware and Sound**→ **AutoPlay**.
 - b. Select **Use AutoPlay for all media and devices**.
 - c. In the Audio CD and DVD Movie fields, select the desired player from the drop down menu.
5. Check that the Regional Code is correct for the selected media:

IMPORTANT:Region can only be changed a limited number of times. After Changes remaining reaches zero, the region cannot be changed even Windows is reinstalled or the drive is moved to another computer.

- a. Navigate to **Start**→ **Control Panel**→ **System and Maintenance**→ **System**→ **Device Manager**.
- b. Double-click **DVD/CD-ROM drives**.
- c. Right-click **DVD drive** and click **Properties**, then click the **DVD Region** tab.
- d. Select the region suitable for the media inserted in the drive.

Discs Do Not Burn Properly

If discs can not be burned, perform the following actions one at a time to correct the problem.

1. Ensure that the default drive is record enabled:
 - a. Navigate to **Start**→ **Computer** and right-click the writable ODD icon. Click **Properties**.
 - b. Select the **Recording** tab. In the **Desktop disc recording** panel, select the writable ODD from the drop down list.
 - c. Click **OK**.
2. Ensure that the software used for burning discs is the factory default. If using different software, refer to the software's user manual.

Playback is Choppy

If playback is choppy or jumps, perform the following actions one at a time to correct the problem.

1. Check that system resources are not running low:
 - a. Try closing some applications.
 - b. Reboot and try the operation again.
2. Check that the ODD controller transfer mode is set to DMA:
 - a. Navigate to **Start**→ **Control Panel**→ **System and Maintenance**→ **System**→ **Device Manager**.

-
- b. Double-click **IDE ATA/ATAPI controllers**, then right-click ATA Device 0.
 - c. Click **Properties** and select the **Advanced Settings** tab. Ensure that the **Enable DMA** box is checked and click **OK**.
 - d. Repeat for the other ATA Devices shown if applicable.

Drive Not Detected

If Windows cannot detect the drive, perform the following actions one at a time to correct the problem.

1. Restart the computer and press F2 to enter the BIOS Utility.
2. Check that the drive is detected in the **ATAPI Model Name** field on the Information page.
NOTE: Check that the entry is identical to one of the ODDs specified in “Hardware Specifications and Configurations” on page 17.
3. Turn off the power and remove the cover to inspect the connections to the ODD. See “Main Unit Disassembly Process” on page 60.
 - a. Check for broken connectors on the drive, motherboard, and cables.
 - b. Check for bent or broken pins on the drive, motherboard, and cable connections.
 - c. Try an alternate cable, if available. If the drive works with the new cable, the original cable should be replaced.
4. Reseat the drive ensuring and all cables are connected correctly.
5. Replace the ODD. See “Disassembly Process” on page 46.

Drive Read Failure

If discs cannot be read when inserted in the drive, perform the following actions one at a time to correct the problem.


1. Remove and clean the failed disc.
2. Retry reading the CD or DVD.
 - d. Test the drive using other discs.
 - e. Play a DVD movie
 - f. Listen to a music CD

If the ODD works properly with alternate discs, the original disc is probably defective and should be replaced.

3. Turn off the power and remove the cover to inspect the connections to the ODD. See “Disassembly Process” on page 46.
 - a. Check for broken connectors on the drive, motherboard, and cables.
 - b. Check for bent or broken pins on the drive, motherboard, and cable connections.
 - c. Try an alternate cable, if available. If the drive works with the new cable, the original cable should be replaced.
4. Replace the ODD. See “Disassembly Process” on page 46.


Wireless Function Failure

If the **WLAN** fails, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

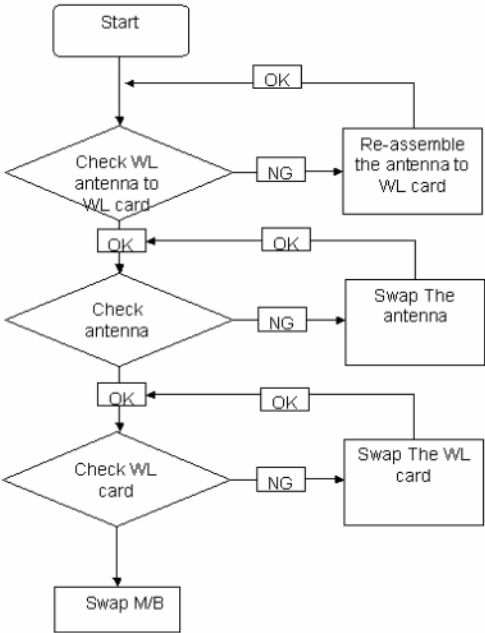

Thermal Unit Failure

If the **Thermal Unit** fails, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

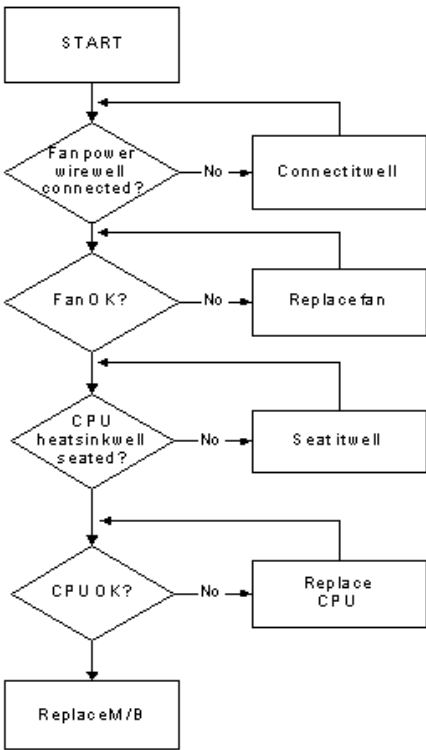

External Mouse Failure

If an external **Mouse** fails, perform the following actions one at a time to correct the problem.

1. Try an alternative mouse.
2. If the mouse uses a wireless connection, insert new batteries and confirm there is a good connection. See the mouse user manual.
3. If the mouse uses a USB connection, try an alternate USB port.
4. Try an alternative program to verify mouse operation. Reinstall the program experiencing mouse failure.
5. Restart the computer.
6. Remove any recently added hardware and associated software.
7. Remove any recently added software and reboot.
8. Restore system and file settings from a known good date using **System Restore**.

If the issue is not fixed, repeat the preceding steps and select an earlier time and date.

9. Run the Event Viewer to check the events log for errors. For more information see Windows Help and Support.
10. Roll back the mouse driver to the previous version if updated recently.
11. Remove and reinstall the mouse driver.
12. Check the Device Manager to determine that:
 - The device is properly installed. There are no red Xs or yellow exclamation marks.
 - There are no device conflicts.
 - No hardware is listed under Other Devices.
13. If the Issue is still not resolved, see "Online Support Information" on page 313.

Other Failures

If the CRT Switch, Dock, LAN Port, external MIC or Speakers, PCI Express Card, 5-in-1 Card Reader or Volume Wheel fail, perform the following general steps to correct the problem. Do not replace a non-defective FRUs:

1. Check Drive whether is OK.
2. Check Test Fixture is ok.
3. Swap M/B to Try.

Intermittent Problems

Intermittent system hang problems can be caused by a variety of reasons that have nothing to do with a hardware defect, such as: cosmic radiation, electrostatic discharge, or software errors. FRU replacement should be considered only when a recurring problem exists.

When analyzing an intermittent problem, do the following:

1. Run the advanced diagnostic test for the system board in loop mode at least 10 times.
2. If no error is detected, do not replace any FRU.
3. If any error is detected, replace the FRU. Rerun the test to verify that there are no more errors.

Undetermined Problems

The diagnostic problems does not identify which adapter or device failed, which installed devices are incorrect, whether a short circuit is suspected, or whether the system is inoperative.

Follow these procedures to isolate the failing FRU (do not isolate non-defective FRU).

NOTE: Verify that all attached devices are supported by the computer.

NOTE: Verify that the power supply being used at the time of the failure is operating correctly. (See “Power On Issue” on page 140.):

1. Power-off the computer.
2. Visually check them for damage. If any problems are found, replace the FRU.
3. Remove or disconnect all of the following devices:
 - Non-Acer devices
 - Printer, mouse, and other external devices
 - Battery pack
 - Hard disk drive
 - DIMM
 - CD-ROM/Diskette drive Module
 - PC Cards
4. Power-on the computer.
5. Determine if the problem has changed.
6. If the problem does not recur, reconnect the removed devices one at a time until you find the failing FRU.
7. If the problem remains, replace the following FRU one at a time. Do not replace a non-defective FRU:
 - System board
 - LCD assembly

Post Codes

Code	Beeps	POST Routine Description
02h		Verify Real Mode
03h		Disable Non-Maskable Interrupt (NMI)
04h		Get CPU type
06h		Initialize system hardware
08h		Initialize chipset with initial POST values
09h		Set IN POST flag
0Ah		Initialize CPU registers
0Bh		Enable CPU cache
0Ch		Initialize caches to initial POST values

Code	Beeps	POST Routine Description
0Fh		Initialize the local bus IDE
10h		Initialize Power Management
11h		Load alternate registers with initial POST values
12h		Restore CPU control word during warm boot
13h		Initialize PCI Bus Mastering devices
14h		Initialize keyboard controller
16h	1-2-2-3	BIOS ROM checksum
17h		Initialize cache before memory autosize
18h		8254 timer initialization
1Ah		8237 DMA controller initialization
1Ch		Reset Programmable Interrupt Controller
20h	1-3-1-1	Test DRAM refresh
22h	1-3-1-3	Test 8742 Keyboard Controller
24h		Set ES segment register to 4 GB
26h		Enable A20 line
28h		Autosize DRAM
29h		Initialize POST Memory Manager
2Ah		Clear 512 KB base RAM
2Ch	1-3-4-1	RAM failure on address line xxxx*
2Eh	1-3-4-3	RAM failure on data bits xxxx* of low byte of memory
bus		
2Fh		Enable cache before system BIOS shadow
30h	1-4-1-1	RAM failure on data bits xxxx* of high byte of memory
bus		
32h		Test CPU bus-clock frequency
33h		Initialize Phoenix Dispatch Manager
36h		Warm start shut down
38h		Shadow system BIOS ROM

Code	Beeps	POST Routine Description
3Ah		Autosize cache
3Ch		Advanced configuration of chipset registers
3Dh		Load alternate registers with CMOS values
42h		Initialize interrupt vectors
45h		POST device initialization
46h	2-1-2-3	Check ROM copyright notice
48h		Check video configuration against CMOS
49h		Initialize PCI bus and devices
4Ah		Initialize all video adapters in system
4Bh		QuietBoot start (optional)
4Ch		Shadow video BIOS ROM

Code	Beeps	POST Routine Description
4Eh		Display BIOS copyright notice
50h		Display CPU type and speed
51h		Initialize EISA board
52h		Test keyboard
54h		Set key click if enabled
58h	2-2-3-1	Test for unexpected interrupts
59h		Initialize POST display service
5Ah		Display prompt "Press F2 to enter SETUP"
5Bh		Disable CPU cache
5Ch		Test RAM between 512 and 640 KB
60h		Test extended memory
62h		Test extended memory address lines
64h		Jump to UserPatch1
66h		Configure advanced cache registers
67h		Initialize Multi Processor APIC
68h		Enable external and CPU caches
69h		Setup System Management Mode (SMM) area
6Ah		Display external L2 cache size
6Bh		Load custom defaults (optional)
6Ch		Display shadow-area message
6Eh		Display possible high address for UMB recovery
70h		Display error messages
72h		Check for configuration errors
76h		Check for keyboard errors
7Ch		Set up hardware interrupt vectors
7Eh		Initialize coprocessor if present
80h		Disable onboard Super I/O ports and IRQs
81h		Late POST device initialization
82h		Detect and install external RS232 ports

Code	Beeps	POST Routine Description
83h		Configure non-MCD IDE controllers
84h		Detect and install external parallel ports
85h		Initialize PC-compatible PnP ISA devices
86h		Re-initialize onboard I/O ports.
87h		Configure Motheboard Configurable Devices (optional)
88h		Initialize BIOS Data Area
89h		Enable Non-Maskable Interrupts (NMIs)
8Ah		Initialize Extended BIOS Data Area
8Bh		Test and initialize PS/2 mouse
8Ch		Initialize floppy controller

Code	Beeps	POST Routine Description
8Fh		Determine number of ATA drives (optional)
90h		Initialize hard-disk controllers
91h		Initialize local-bus hard-disk controllers
92h		Jump to UserPatch2
93h		Build MPTABLE for multi-processor boards
95h		Install CD ROM for boot
96h		Clear huge ES segment register
97h		Fixup Multi Processor table
98h	1-2	Search for option ROMs. One long, two short beeps on checksum failure
99h		Check for SMART Drive (optional)
9Ah		Shadow option ROMs
9Ch		Set up Power Management
9Dh		Initialize security engine (optional)
9Eh		Enable hardware interrupts
9Fh		Determine number of ATA and SCSI drives
A0h		Set time of day
A2h		Check key lock
A4h		Initialize Typematic rate
A8h		Erase F2 prompt
AAh		Scan for F2 key stroke
ACh		Enter SETUP
A Eh		Clear Boot flag
B0h		Check for errors
B2h		POST done - prepare to boot operating system
B4h	1	One short beep before boot
B5h		Terminate QuietBoot (optional)
B6h		Check password (optional)
B9h		Prepare Boot
BAh		Initialize DMI parameters
BBh		Initialize PnP Option ROMs


Code	Beeps	POST Routine Description
BCh		Clear parity checkers
BDh		Display MultiBoot menu
BEh		Clear screen (optional)
BFh		Check virus and backup reminders
C0h		Try to boot with INT 19
C1h		Initialize POST Error Manager (PEM)
C2h		Initialize error logging
C3h		Initialize error display function

Code	Beeps	POST Routine Description
C4h		Initialize system error handler
C5h		PnPnd dual CMOS (optional)
C6h		Initialize notebook docking (optional)
C7h		Initialize notebook docking late
C8h		Force check (optional)
C9h		Extended checksum (optional)
D2h		Unknown interrupt

Code	Beeps	For Boot Block in Flash ROM
E0h		Initialize the chipset
E1h		Initialize the bridge
E2h		Initialize the CPU
E3h		Initialize system timer
E4h		Initialize system I/O
E5h		Check force recovery boot
E6h		Checksum BIOS ROM
E7h		Go to BIOS
E8h		Set Huge Segment
E9h		Initialize Multi Processor
EAh		Initialize OEM special code
EBh		Initialize PIC and DMA
ECh		Initialize Memory type
EDh		Initialize Memory size
EEh		Shadow Boot Block
EFh		System memory test
F0h		Initialize interrupt vectors
F1h		Initialize Run Time Clock
F2h		Initialize video
F3h		Initialize System Management Mode
F4h	1	Output one beep before boot
F5h		Boot to Mini DOS
F6h		Clear Huge Segment
F7h		Boot to Full DOS


Jumper and Connector Locations

Top View

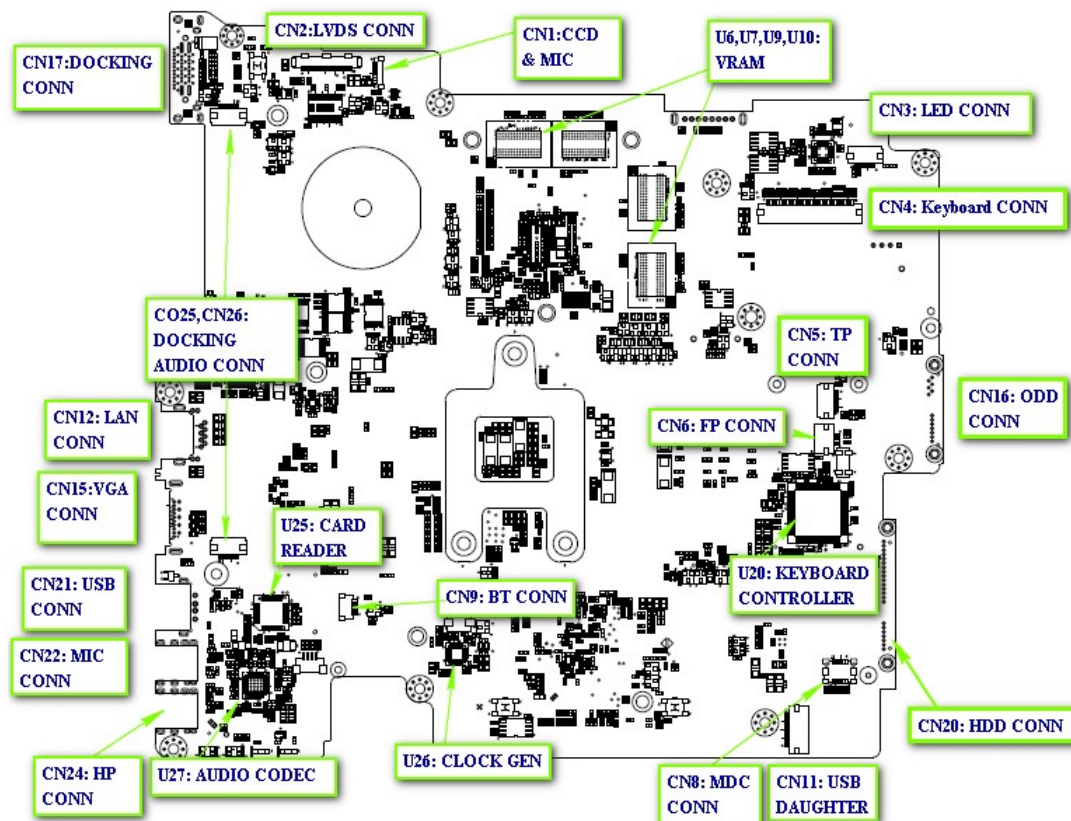

Item	Description	Item	Description
CN17	Docking Conn	CN8	Midc Conn
CN2	Lvds Conn	U26	Clock Gen
CN1	Ccd&Mic	CN9	Bt Conn
U6,U7,U9,U10	Vram	U25	Card Reader
CN3	Led Conn	U27	Audio Codec
CN4	Keyboard Conn	CN24	Hp Conn
CN5	Tp Conn	CN22	Mic Conn
CN6	Fp Conn	CN21	Usb Conn
CN16	Odd Conn	CN15	Vga Conn
U20	Keyboard Controller	CN12	Lan Conn
CN20	Hdd Conn	CO25C, N26	Audio Conn
CN11	Usb Daughter		

Bottom View

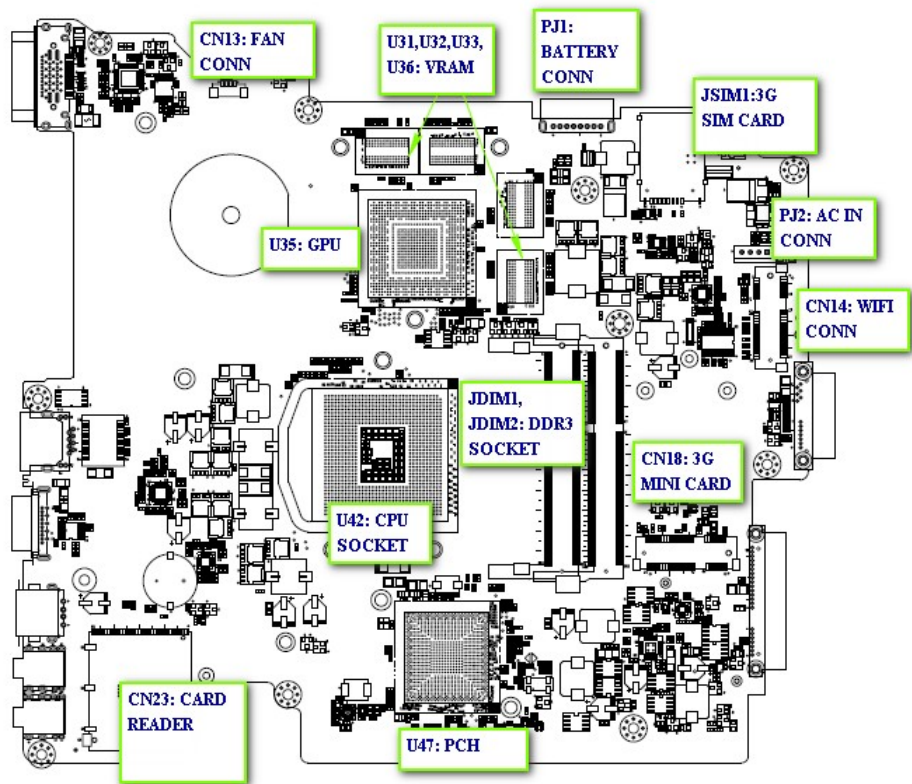

Item	Description	Item	Description
CN13	Fan Conn	CN18	3g Mini Card
U31,U32, U33,U36	Vram	JDIM1,J DIM2	Ddr3 Socket
PJ1	Battery Conn	U42	Cpu Socket
JSIM1	Sim Card	U47	Pch
PJ2	Ac In Conn	CN23	Card Reader
CN14	Wifi Conn	U35	Gpu

Clearing Password Check and BIOS Recovery

This section provide you the standard operating procedures of clearing password and BIOS recovery for Acer ZR9. Acer provides one Hardware Open Gap on the main board for clearing password check, and one Hotkey for enabling BIOS Recovery.


Clearing Password Check

Steps for Clearing BIOS Password Check

If users set BIOS Password (Supervisor Password and/or User Password) for a security reason, BIOS will ask the password during systems POST or when systems enter to BIOS Setup menu. However, once it is necessary to bypass the password check, users need to short the HW Gap to clear the password by the following steps:

1. Power Off the system, and remove HDD, AC and Battery from the machine.
2. See “Removing the Upper Cover” on page 64 to locate the J1 jumper.
3. Use an electric conductivity tool to short the two points of the HW Gap.
4. Plug in AC, keep the short condition on the HW Gap, and press Power Button to power on the system till BIOS POST finish. Then remove the tool from the HW Gap.
5. Restart system. Press **F2** key to enter BIOS Setup menu.
6. If there is no Password request, BIOS Password is cleared. Otherwise, please follow the steps and try again.

NOTE: These steps are only for clearing BIOS Password (Supervisor Password and User Password).

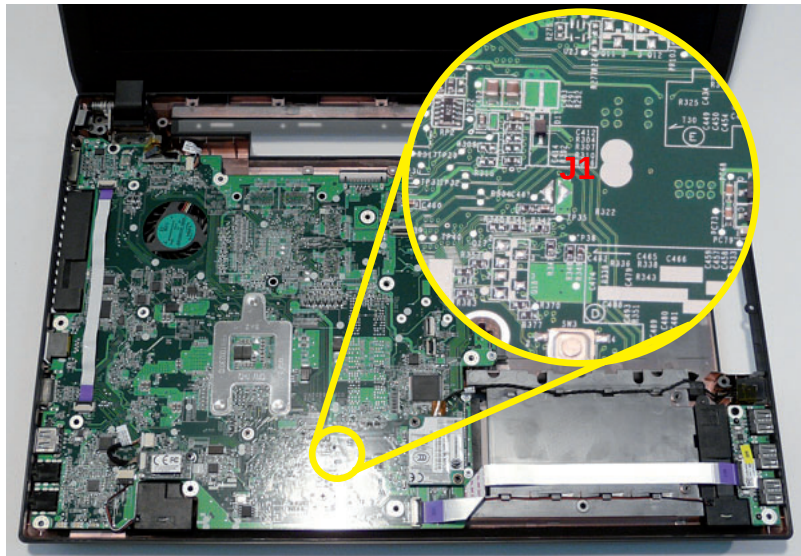

BIOS Recovery by Crisis Disk

BIOS Recovery Boot Block:

BIOS Recovery Boot Block is a special block of BIOS. It is used to boot up the system with minimum BIOS initialization. Users can enable this feature to restore the BIOS firmware to a successful one once the previous BIOS flashing process failed.

BIOS Recovery Hotkey:

The system provides a function hotkey: **Fn+Esc**, for enable BIOS Recovery process when system is powered on during BIOS POST. To use this function, it is strongly recommended to have the AC adapter and Battery present. If this function is enabled, the system will force the BIOS to enter a special BIOS block, called Boot Block.

Steps for BIOS Recovery from USB Storage:

Before doing this, prepare the Crisis USB key. The Crisis USB key could be made by executing the Crisis Disk program in another system with Windows XP OS.

Follow the steps below:

1. Format the USB storage disk using the Fast Format option.
2. Save ROM file (file name: JAL90x64.fd) to the root directory of USB storage. Make sure that there is no other BIOS file saved in the same directory.
3. Plug USB storage into USB port.
4. Press **Fn + ESC** button then plug in AC power.
The Power button flashes once.
5. Press **Power** button to initiate system CRISIS mode.
When CRISIS is complete, the system auto restarts with a workable BIOS.
6. Update the latest version BIOS for this machine by regular BIOS flashing process.

FRU (Field Replaceable Unit) List


This chapter gives you the FRU (Field Replaceable Unit) listing in global configurations of the Acer TravelMate 8572/8572G. Refer to this chapter whenever ordering for parts to repair or for RMA (Return Merchandise Authorization).

Please note that WHEN ORDERING FRU PARTS, you should check the most up-to-date information available on your regional web or channel. For whatever reasons a part number change is made, it will not be noted on the printed Service Guide. For ACER AUTHORIZED SERVICE PROVIDERS, your Acer office may have a DIFFERENT part number code from those given in the FRU list of this printed Service Guide. You MUST use the local FRU list provided by your regional Acer office to order FRU parts for repair and service of customer machines.

NOTE: To scrap or to return the defective parts, you should follow the local government ordinance or regulations on how to dispose it properly, or follow the rules set by your regional Acer office on how to return it.


Exploded Diagrams

LCD Assembly

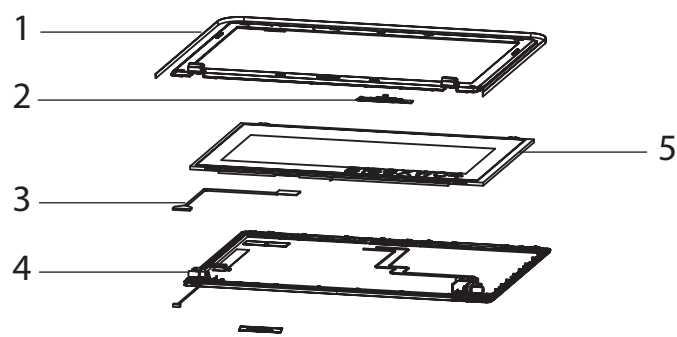

No.	Description	Acer P/N	No.	Description	Acer P/N
1	LCD Bezel	60.TWG07.007	4	LCD Cover	60.TWG07.006
2	Camera	AM.21400.067	5	LCD Module	6M.TWG07.003
3	LCD Cable	50.TWG07.001			

Chassis Assembly

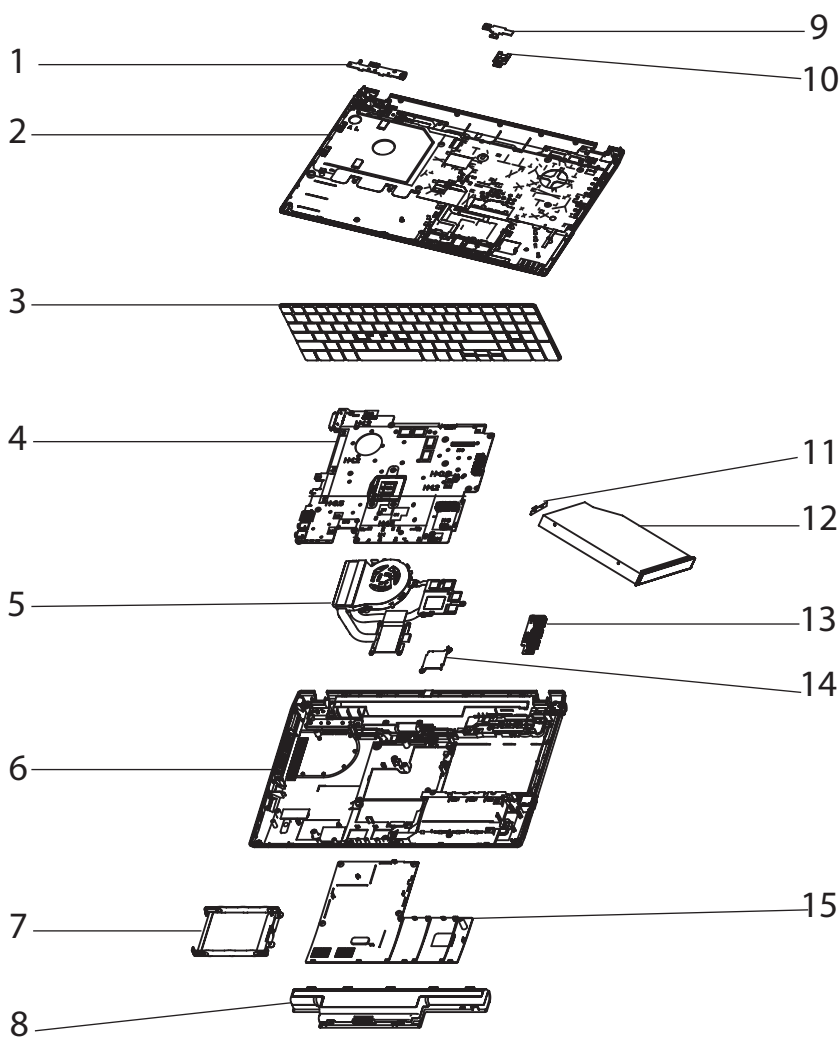

No.	Description	Acer P/N	No.	Description	Acer P/N
1	Function Board	55.TWG07.003	9	Fingerprint Board	55.TWG07.001
2	Upper Case	60.TWG07.004	10	Fingerprint Bracket	33.TWG07.001
3	Keyboard	KB.I170A.228	11	ODD Bracket	33.PDA07.003
4	Mainboard	MB.TW806.001	12	ODD Module	6M.TWG07.001
5	Thermal Module	60.TWG07.009	13	USB Board	55.TWG07.002
6	Lower Case	60.TWG07.011	14	PCH Heatsink	33.TWG07.002
7	HDD Holder	42.TWG07.002	15	Base Door	42.TWG07.001
8	Battery	BT.00605.062			

Acer TravelMate 8572/8572G FRU List

Category	Part Name	Description	Acer Part No.
ADAPTER			
	Adapter DELTA 65W 19V 1.7x5.5x11 Yellow ADP-65JH DB A, LV5 LED LF	Z06 ADP 19V 3.42A ADP-65JH DBA S.P	AP.06501.026
	Adapter LITE-ON 65W 19V 1.7x5.5x11 Yellow PA-1650-22AC LV5 LED LF	Z06 ADP 19V 3.42A PA-1650-22 AC S.P	AP.06503.024
	Adapter HIPRO 65W 19V 1.7x5.5x11 Yellow HP-A0652R3B 1LF, LV5 LED LF	Z06 ADP 19V 3.42AHP-A0652R3B1LF S.P	AP.0650A.012
	Adapter DELTA 90W 19V 1.7x5.5x11 Blue ADP-90CD DB A, LV5 LED LF	ZK6 ADP 19V 4.74A ADP-90CD DBA S.P	AP.09001.027
	Adapter LITE-ON 90W 19V 1.7x5.5x11 Blue PA-1900-34AR, LV5 LED LF	ZK6 ADP 19V 4.74A PA-1900-34AR S.P	AP.09003.021
	Adapter HIPRO 90W 19V 1.7x5.5x11 Blue HP-A0904A3 B1LF, LV5 LED LF	ZK6 ADP 19V 4.74AHP-A0904A3B1LF S.P	AP.0900A.005
BATTERY			
	Battery PANASONIC AS10D Li-Ion 3S2P PANASONIC 6 cell 4400mAh Main COMMON ID:AS10D51	ZYD BATT LI,AS10D51 3S2P 4.4A S.P	BT.00605.062
	Battery SANYO AS10D Li-Ion 3S2P SANYO 6 cell 4400mAh Main COMMON ID:AS10D31	ZYD BATT LI,AS10D31 3S2P 4.4A S.P	BT.00603.111
	Battery SANYO AS10D Li-Ion 3S2P SANYO 6 cell 6000mAh Main COMMON ID:AS10D3E	ZR9 BATT LI,AS10D3E 3S2P 6.0A S.P	BT.00603.117
	Battery PANASONIC AS10D Li-Ion 3S2P PANASONIC 6 cell 6000mAh Main COMMON ID:AS10D5E	ZR9 BATT LI,AS10D5E 3S2P 6.0A S.P	BT.00605.065
	Battery SIMPLO AS10D Li-Ion 3S2P SAMSUNG 6 cell 6000mAh Main COMMON ID:AS10D7E	ZR9 BATT LI,AS10D7E 3S2P 6.0A S.P	BT.00607.130

Category	Part Name	Description	Acer Part No.
	Battery SANYO AS10G Li-Ion 3S3P SANYO 9 cell 9000mAh Main COMMON ID:AS10G3E	ZR9 BATT LI,AS10G3E 3S3P 9.0A S.P	BT.00903.013
BOARD			
	Foxconn Wirelss LAN Atheros HB95BG (HM) T77H121.10	ZQ2 W/L MINICARD 802.11BG(T77H121.10)S.P	NI.23600.077
	Foxconn Wireless LAN Atheros HB93 2x2 BGN (HM)	ZY6 W/L 802.11 B/G/N H MINI(T77H047.31) S.P	NI.23600.062
	Foxconn Wireless LAN Atheros HB97 2x2 BGN (HM)	ZQ2 W/L MINICARD 802.11BGN(T77H167.07) S.P	NI.23600.072
	Liteon Wireless LAN Atheris HB93 1x2 BGN (HM) WN6602AH	ZH8 WLAN 802.11B/G/N WN6602AH-AA S.P	NI.23600.051
	Liteon Wireless LAN Atheris HB97 2x2 BGN (HM) WN6603AH	ZR9 WLAN 802.11 B/G/N 2X2(WN6603AH-AA)S.P	NI.23600.073
	Foxconn Wireless LAN Broadcom 4312H BG (HM)	ZA8 WLAN (802.11B/G)BROADCOM S.P	NI.23600.053
	Foxconn Wireless LAN Broadcomm 43225 2x2 BGN (HM) T77H103.00	ZQ2 W/L 802.11 B/G/N T77H103.00S.P	NI.23600.066
	Foxconn Bluetooth FOX BRM 2046 BT2.1	ZY9 BLUETOOTH T60H928.33 S.P	BH.21100.004
	Foxconn Bluetooth BRM 2046 BT3.0 (T60H928.33) f/w:861	ZY9 BLUETOOTH T60H928.33 S.P	BH.21100.008
	Foxconn Bluetooth ATH AR3011	ZQ1 BLUETOOTH MODULE MT77H056.00 S.P	BH.21100.005
	Foxconn Bluetooth ATH AR3011 (BT3.0)	ZQ1 BLUETOOTH MODULE MT77H056.00 S.P	BH.21100.009
	Foxconn Bluetooth BRM 2070 (T77H114.01)	ZYD BLUETOOTH MODULE T77H114.01 S.P	BH.21100.007
	Foxconn Bluetooth BRM 2070 (T77H114.01) BT 3.0	ZYD BLUETOOTH MODULE T77H114.01 S.P	BH.21100.010
	Ericsson F3307-900MHz	ZR7 WWAN CARD KRD 131 16/82 S.P	LC.21300.039

Category	Part Name	Description	Acer Part No.
	Lite-On Conexant -Unizion 1.5_3.3v AUS RD02-D330 B85247600G	ZY2 MODEM CARD B85247600G S.P	FX.22500.021
	FP BOARD	ZR9 FP/B ASSY S.P	55.TWG07.001
	USB BOARD	ZR9 USB/B ASSY	55.TWG07.002
	FUNCTION BOARD	ZR9 SWITCH/B ASSY	55.TWG07.003
CABLE			
	PWR CORD V943B30001218008 DANISH 3P	ZR1 PWR CORD V943B30001218008 DANISH S/P	27.A03V7.006
	PWR CORD(ISR)1.8M 3PBLK FZ0I0008-038	ZR1 PWR CORD(ISR)1.8M 3PBLK S/P	27.TATV7.005
	PWR CORD V50CB3T3012180QD TW- 110V,3P	ZR1 PWR CORD V50CB3T3012180QD TW S/P	27.A99V7.002
	POWER CORD(SWI)1.8M 3PBLACK FZ010008-011	ZR1 POWER CORD(SWI)1.8M 3PBLACK S/P	27.A99V7.004
	POWER CORD(IT) 1.8M 3PBLACK FZ010008-008	ZR1 POWER CORD(IT) 1.8M 3P S/P	27.A99V7.005
	POWER CORD(S.A) 1.8M 3BLACK FZ010008-006	ZR1 POWER CORD(S.A) 1.8M 3BLACK S/P	27.T48V7.001
	POWER CORD US 3PIN ROHS	ZB1 PWR CORD US S/P	27.TAXV7.001
	POWER CORD(EU) 1.8M 3PBLACK FM010008-010	ZR1 POWER CORD(EU) 1.8M 3PBLACK S/P	27.TATV7.001
	POWER CORD BRAZIL IMETRO 3 PIN	BL3 POWER CORD BRAZIL 3P S/P	27.S0607.001
	POWER CORD UK 3PIN	ET2S POWER CORD S/ P-UK	27.A03V7.004
	POWER CORD ITALIAN 3PIN	EI2 POWER CORD 3P ITALY S.P.	27.A99V7.005
	POWER CORD PRC 3P Y536B30001218008	EW1 POWER CORD S.P. (CHINESE)	27.TATV7.004
	POWER CORD AU W/ LABEL (3 PIN)	ZL6A POWER CORD S/ P-AU S.P.	27.A50V7.003
	BLUETOOTH CABLE	ZQ1 BLUETOOTH CABLE ASSY(5P/ 8P,1A)S.P	50.PSR07.001
	BLUETOOTH CABLE (6P FOR BT3.0 BRM2070)	ZQ1 CABLE BLUETOOTH3.0(5P/ 6P,3A)S/P	50.TVM07.002

Category	Part Name	Description	Acer Part No.
CASE/COVER/BRACKET ASSEMBLY			
	LOWER CASE (W/ SPK SET,USB BD FFC, MODEM) FOR 90W	ZR9 BASE 90W S/P	60.TWG07.011
	LOWER CASE (W/ SPK SET,USB BD FFC, MODEM) FOR 65W	ZR9 BASE 65W S/P	60.TWG07.001
	LOWER CASE (W/ SPK SET,USB BD FFC, W/O MODEM) FOR 90W	ZR9 BASE SUB ASSY 65W WO RJ11S/P	60.TWG07.002
	LOWER CASE (W/ SPK SET,USB BD FFC, W/O MODEM) FOR 65W	ZR9 BASE SUB ASSY 90W WO RJ11S.P	60.TWG07.003
	UPPER CASE (W/ FP, W/ FFC*3)	ZR9 TOP SUB ASSY S.P	60.TWG07.004
	UPPER CASE (W/O FP, W/ FFC*2)	ZR9 TOP SUB ASSY WO FP S.P	60.TWG07.005
	BASE DOOR	ZR9 RAM DOOR SUB ASSY	42.TWG07.001
	DUMMY CARD	ZYD DUMMY SD CARD(EBZYD018) S/P	42.TVM07.002
	FINGERPRINT BRACKET	ZR9 FINGER BKT S.P	33.TWG07.001
	HDD HOLDER	ZR9 DASP HDD HOLDER-1S/P	42.TWG07.002
CPU/PROCESSOR			
	CPU Intel Core i3 330M PGA 2.13G 35W Arrandale, TJ90, VT, 3M L3	ZY9 CPU(988P)I3-330M 2.13G SLBMD(PGA)S.P	KC.33001.DMP
	CPU Intel Core i3 350M PGA 2.26G 35W Arrandale, TJ90, VT, 3M L3	ZY9 CPU(988P)I3-350M 2.26G SLBPK(PGA)S.P	KC.35001.DMP
	CPU Intel Core i3 350M PGA 2.26G 35W K-0 TJ90, VT	ZR9 CPU(988P)I3-350M 2.26G SLBU5(PGA)S/P	KC.35K01.DMP
	CPU Intel Core i5 430M PGA 2.26G ARD, up to SC 2.53G, 3M L3	ZY9 CPU(988P)I5-430M 2.26G SLBPN(PGA)S.P	KC.43001.DMP
	CPU Intel Core i5 520M 2.4G 3M	ZY9 CPU(988P)I5-520M 2.4G SLBNB(PGA)S.P	KC.52001.DMP
	CPU Intel Core i5 540M 2.53G 3M	ZY9 CPU(988P)I5-540M 2.53G SLBPG(PGA)S.P	KC.54001.DMP
	CPU Intel Core i7 620M PGA 2.66G 4M	ZY9 CPU(988P)I7-620M 2.66G SLBPD(PGA)S.P	KC.62001.DMP
		ZR9 CPU(988P)P6000 1.86G Q4LE(PGA) S.P	KC.60001.DPP
	CPU Intel Pentium Dual-Core P6000 1.86G 35W C2 DDR3-1066	ZR9 CPU(988P)P6000 1.86G Q4LE(PGA) S.P	KC.60001.DPP
	CPU Intel Core i5 450M PGA 2.4G 35W K-0 up to SC 2.66G	ZQ3 CPU(988P)I5-450M 2.4G SLBTZ(PGA)S.P	KC.45K01.DMP

Category	Part Name	Description	Acer Part No.
DVD RW DRIVE			
	ODD SUPER MULTI 12.7mm MODULE ASSY 8X	SM	6M.TWG07.001
	ODD TOSHIBA Super-Multi DRIVE 12.7mm Tray DL 8X TS-L633C LF W/O bezel SATA (HF + Windows 7)	ZY9 DVD+/-RW SATA TS-L633C S.P	KU.00801.035
	ODD HLDS Super-Multi DRIVE 12.7mm Tray DL 8X GT30N LF W/O bezel SATA (HF + Windows 7)	ZY7 DVD+/-RW/RAM GT30N S.P	KU.0080D.048
	ODD SONY Super-Multi DRIVE 12.7mm Tray DL 8X AD-7585H LF W/O bezel SATA (HF + Windows 7)	ZY9 DVD/RW/RAM AD-7585H S.P	KU.0080E.027
	ODD PLDS Super-Multi DRIVE 12.7mm Tray DL 8X DS-8A4SH LF W/O bezel SATA (HF + Windows 7)	ZY9 DVD/RW/RAM DS-8A4SH F/W: CA11 S.P	KU.0080F.006
	ODD HLDS Super-Multi DRIVE 12.7mm Tray DL 8X GT31N (R5-1) LF W/O bezel SATA with Renesas Solution (HF + Windows 7)	ZQ1 DVD+/-RW/RAM GT31N S.P	KU.0080D.054
	ODD BEZEL - SUPER-MULTI	ZR9 ODD BEZEL SUPER-MULTI S/P	42.TWG07.003
	ODD BRACKET	ZY8 ODD BKT S.P	33.PDA07.003
DVD RW DRIVE			
	ODD BD COMBO 12.7mm MODULE ASSY 4X	BD-COMBO	6M.TWG07.002
	ODD HLDS BD COMBO 12.7mm Tray DL 4X CT21N LF W/O bezel 1.00 SATA (HF + Windows 7)	ZQ1 DVD/RW SATA BD-COMBO CT21N F/W:1.00 S.P	KO.0040D.004
	ODD PLDS BD COMBO 12.7mm Tray DL 4X DS-4E1S LF W/O bezel SATA (Windows 7)	ZY9 BLUE RAY COMBO DS-4E1S FW: EA17 S.P	KO.0040F.003
	ODD BEZEL - BLUE RAY	ZR9 ODD BEZEL BLUE RAY S/P	42.TWG07.004
	ODD BRACKET	ZY8 ODD BKT S.P	33.PDA07.003

Category	Part Name	Description	Acer Part No.
HDD/HARD DISK DRIVE			
	HDD SEAGATE 2.5" 7200rpm 320GB ST9320423AS Holiday SATA LF F/W:0002SDM1	ZY9 HDD(320G)ST9320423A S 9HV14E-500 S.P	KH.32001.016
	HDD SEAGATE 2.5" 5400rpm 160GB ST9160314AS Wyatt SATA LF F/W:0001SDM1	ZH7 HDD(160G)ST9160314A S 9HH13C-188 STN BSQ	KH.16001.042
	HDD TOSHIBA 2.5" 5400rpm 160GB MK1665GSX, Capricorn BS, 320G/P SATA 8MB LF F/W:GJ001J	ZQ1 HDD(160G) MK1665GSX-EUL S.P	KH.16004.008
	HDD HGST 2.5" 5400rpm 160GB HTS545016B9A300 Panther B SATA LF F/ W:C60F Disk imbalance criteria = 0.014g-cm	ZH7 HDD(160G) HTS545016B9A300 S.P	KH.16007.026
	HDD WD 2.5" 5400rpm 160GB WD1600BEVT- 22A23T0 , WD, ML320S SATA 8MB LF F/ W:01.01A01	ZQ1 HDD(160G)WD1600BEV T-22A23T0 S.P	KH.16008.027
	HDD SEAGATE 2.5" 5400rpm 250GB ST9250315AS Wyatt SATA LF F/W:0001SDM1	Z06 HDD(250G)ST9250315A S 9HH132-188 S.P	KH.25001.016
	HDD TOSHIBA 2.5" 5400rpm 250GB MK2565GSX, Capricorn BS, 320G/P SATA 8MB LF F/W:GJ001J	ZQ1 HDD(250G) MK2565GSX-EUL S.P	KH.25004.005
	HDD WD 2.5" 5400rpm 250GB WD2500BEVT- 22A23T0, WD, ML320S SATA 8MB LF F/ W:01.01A01.	ZQ1 HDD(250G)WD2500BEV T-22A23T0 S.P	KH.25008.025
	HDD HGST 2.5" 5400rpm 250GB HTS545025B9A300 Panther B SATA LF F/ W:C60F Disk imbalance criteria = 0.014g-cm	ZH7 HDD(250G)HTS545025B 9A300 S.P	KH.25007.016
	HDD SEAGATE 2.5" 5400rpm 320GB ST9320325AS Wyatt SATA LF F/W:0001SDM1	ZH7 HDD(320G)ST9320325A S 9HH13E-188 S.P	KH.32001.017
	HDD TOSHIBA 2.5" 5400rpm 320GB Capricorn BS ,MK3265GSX SATA 8MB LF F/W:GJ001J	ZQ1 HDD(320G) MK3265GSX-EUL S.P	KH.32004.004

Category	Part Name	Description	Acer Part No.
	HDD HGST 2.5" 5400rpm 320GB HTS545032B9A300 Panther B SATA LF F/ W:C60F Disk imbalance criteria = 0.014g-cm	ZH7 HDD(320G) HTS545032B9A300 S.P	KH.32007.008
	HDD WD 2.5" 5400rpm 320GB WD3200BEVT- 22A23T0,ML320S,WD SATA 8MB LF F/ W:01.01A01	ZQ1 HDD(320G)WD3200BEV T-22A23T0 S.P	KH.32008.019
	HDD SEAGATE 2.5" 5400rpm 500GB ST9500325AS Wyatt SATA LF F/W:0001SDM1	ZK2 HDD(500G) ST9500325AS S.P	KH.50001.011
	HDD TOSHIBA 2.5" 5400rpm 500GB MK5065GSX,Capricorn BS, 320G/P SATA 8MB LF F/ W:GJ001J	ZQ1 HDD(500G) MK5065GSX-EUL S.P	KH.50004.002
	HDD HGST 2.5" 5400rpm 500GB HTS545050B9A300 Panther B SATA LF F/ W:C60F Disk imbalance criteria = 0.014g-cm	ZH7 HDD(500G) HTS545050B9A300 S.P	KH.50007.010
	HDD WD 2.5" 5400rpm 500GB WD5000BEVT- 22A0RT0, ML320M,WD SATA 8MB LF F/ W:01.01A01	ZQ1 HDD(500G)WD5000BEV T-22A0RT0 S.P	KH.50008.017
	HDD TOSHIBA 2.5" 5400rpm 640GB MK6465GSX,Capricorn BS,320G/P SATA 8MB LF F/W:GJ002J	ZQ2 HDD (640G) MK6465GSX-EULS.P	KH.64004.001
	HDD WD 2.5" 5400rpm 640GB WD6400BEVT- 22A0RT0, ML320 SATA 8MB LF F/W:01.01A01	ZY9 HDD(640GB)WD6400BE VT-22A0RT0 S.P	KH.64008.004
	HDD SEAGATE 2.5" 7200rpm 250GB ST9250410AS Holiday SATA LF F/W:0002SDM1	ZR9 HDD(250G)ST9250410A S 9HV142-188 S.P	KH.25001.017
	HDD HGST 2.5" 7200rpm 250GB HTS723225L9A360 Falcon-C SATA LF F/ W:C30F	SA6 HDD(250G)HTS723225L 9A360 S.P	KH.25007.014
	HDD SEAGATE 2.5" 7200rpm 320GB ST9320423AS Holiday SATA LF F/W:0002SDM1	ZR9 HDD(320G)ST9320423A S 9HV14E-188 S.P	KH.32001.016
	HDD HGST 2.5" 7200rpm 320GB HTS723232L9A360 Falcon-C SATA 16MB LF F/ W:C30F	SA6 HDD(320G)HTS723232L 9A360 S.P	KH.32007.005

Category	Part Name	Description	Acer Part No.
	HDD SEAGATE 2.5" 7200rpm 500GB ST9500420AS Holiday SATA LF F/W:0002SDM1	ZR9 HDD(500G)ST9500420A S 9HV144-188 S.P	KH.50001.013
	HDD HGST 2.5" 7200rpm 500GB HTS725050A9A364 SATA 8MB LF F/W: C70E	ZR9 HDD(500G)HTS725050A 9A364 0A73275 S.P	KH.50007.011
	Flash Disk INTEL SSD NAND 160GB SSDSA2MH160G2C1 MM# 902384 LF	ZR9 SSD SATA(160G)2.5"SSDSA2 MH160G2C1 S.P	KF.1600N.003
	Flash Disk INTEL SSD NAND 160GB SSDSA2MH160G2AC MM#908113 9.5mm LF+HF	ZR9 SSD SATA(160G)2.5"SSDSA2 MH160G2AC S.P	KF.1600N.005
	HDD BRACKET	ZR6 HDD-BKT S.P	33.EDM07.001
KEYBOARD			
	Keyboard ACER TM7T_A10B TM7T Internal 17 Standard 105KS Black US International Texture	ZYD K/ B(UI)ZYD(AEZYDR00,3A) S.P	KB.I170A.228
	Keyboard ACER TM7T_A10B TM7T Internal 17 Standard 106KS Black German Texture	ZYD K/ B(GERMAN)ZYD(AEZYD G00,3A)S.P	KB.I170A.211
	Keyboard ACER TM7T_A10B 17 Standard 105KS Black Chinese Texture	ZYD K/B(TAIWAN)S.P	KB.I170A.207
	Keyboard ACER TM7T_A10B 17 Standard 105KS Black Greek Texture	ZYD K/B(GREEK)S/P	KB.I170A.212
	Keyboard ACER TM7T_A10B 17 Standard 106KS Black Swiss/G Texture	ZYD K/B(SWISS)S/P	KB.I170A.224
	Keyboard ACER TM7T_A10B 17 Standard 105KS Black Thailand Texture	ZYD K/B(THAI)S/P	KB.I170A.225
	Keyboard ACER TM7T_A10B 17 Standard 106KS Black SLO/CRO Texture	ZYD K/B(CROATIAN)S/P	KB.I170A.221
	Keyboard ACER TM7T_A10B 17 Standard 106KS Black CZ/SK Texture	ZYD K/B(CZ-SLOVAK)S/ P	KB.I170A.206

Category	Part Name	Description	Acer Part No.
	Keyboard ACER TM7T_A10B 17 Standard 106KS Black Hungarian Texture	ZYD K/ B(HUNGARIAN)S/P	KB.I170A.213
	Keyboard ACER TM7T_A10B 17 Standard 106KS Black Brazilian Portuguese Texture	ZYD K/B(BRAZIL)S/P	KB.I170A.205
	Keyboard ACER TM7T_A10B 17 Standard 105KS Black Russian Texture	ZYD K/B(RUSSIAN)S/P	KB.I170A.220
	Keyboard ACER TM7T_A10B 17 Standard 106KS Black Turkish Texture	ZYD K/B(TURKISH)S/P	KB.I170A.226
	Keyboard ACER TM7T_A10B 17 Standard 106KS Black Belgium Texture	ZYD K/B(BELGIUM)S/P	KB.I170A.204
	Keyboard ACER TM7T_A10B 17 Standard 106KS Black Sweden Texture	ZYD K/B(SWEDISH)S/P	KB.I170A.223
	Keyboard ACER TM7T_A10B 17 Standard 106KS Black Italian Texture	ZYD K/B(ITALIAN)S/P	KB.I170A.214
	Keyboard ACER TM7T_A10B 17 Standard 109KS Black Japanese Texture	ZYD K/B(JAPAN)S.P	KB.I170A.215
	Keyboard ACER TM7T_A10B 17 Standard 106KS Black US w/ Canadian French Texture	ZYD K/B(US-FR-CAN)S/ P	KB.I170A.230
	Keyboard ACER TM7T_A10B 17 Standard 106KS Black Danish Texture	ZYD K/B(DANISH)S/P	KB.I170A.208
	Keyboard ACER TM7T_A10B TM7T Internal 17 Standard 106KS Black Spanish Texture	ZYD K/B(SPANISH)S/P	KB.I170A.222

Category	Part Name	Description	Acer Part No.
LCD			
	LCD MODULE 15.6" ASSY LED GLARE W/ ANTENNA*2 FOR WIFI	LCD MODULE WIFI	6M.TWG07.003
	LED LCD AUO 15.6"W WXGA Glare B156XW04 V0 LF 200nit 8ms 400:1 (Power saving)	ZR7 LCD 15.6"(LED)B156XW04 S.P	LK.15605.015
	LCD MODULE 15.6" ASSY LED NON-GLARE W/ ANTENNA*2 FOR WIFI	LCD MODULE WIFI	6M.TWG07.005
	LED LCD AUO 15.6"W WXGA None Glare B156XW04 V1 LF 200nit 8ms 500:1 (Power saving)	ZR9 LCD 15.6"(LED)B156XW04 V1(H/W:0A)S.P	LK.15605.017
	LED LCD LPL 15.6"W WXGA None Glare LP156WH3-TLM1 LF 200nit 16ms 500:1 (Power saving)	ZR9 LCD 15.6"(LED) LP156WH3-TLM1 S.P	LK.15608.010
	LED LCD AUO 15.6"W WXGA None Glare B156XW03 V2 LF 220nit 8ms 500:1	ZR9 LCD 15.6"(LED)B156XW03 V2(H/W:0A)S.P	LK.15605.006
	LED LCD LPL 15.6"W WXGA None Glare LP156WH3-TLB1 LF 200nit 8ms 300:1	ZR9 LCD 15.6"(LED) LP156WH3-TLB1S.P	LK.15608.004
	LED LCD SAMSUNG 15.6"W WXGA None Glare LTN156AT11-001 LF 200nit 16ms 500:1 power saving	ZR9 LCD 15.6"(LED) LTN156AT11-001 S.P	LK.15606.011
	LCD MODULE 15.6" ASSY LED GLARE W/ ANTENNA*4 FOR 3G	LCD MODULE 3G	6M.TWG07.004
	LCD MODULE 15.6" ASSY LED NON-GLARE W/ ANTENNA*4 FOR 3G	LCD MODULE 3G	6M.TWG07.006
	LCD COVER W/ LCD HINGE, MIC, MIC CABLE, ANT*2 FOR WIFI	ZR9 LCD COVER WIFI S.P	60.TWG07.006
	LCD BEZEL W/RUBBER	ZR9 LCD BEZEL S/P	60.TWG07.007
	LCD CABLE	ZR9 LCD CABLE(19V,40/ 30P,1A)S.P	50.TWG07.001

Category	Part Name	Description	Acer Part No.
	Chicony 1.3M CH9665SN (CNF9157)	ZQ1 CAMERA CNF915721004970LH S.P	AM.21400.067
	Suyin 1.3M SY9665SN	ZQ1 CAMERA 09P2BF127 S.P	AM.21400.068
	Liteon 1.3M LT9665AL (09P2SF119)	ZQ1 CAMERA 09P2SF119 S.P	AM.21400.069
MAINBOARD			
	MAIN BOARD HM55 N11P W/CARD READER BT, W/ O CPU RAM, FOR NON-3G	ZR9 MB(N11P/HYN/BT)W/O CPU,TPM,3G S.P	MB.TW806.001
	MAIN BOARD HM55 N11M W/CARD READER BT, W/ O CPU RAM, FOR NON-3G	ZR9 MB(N11M/SAM/BT)W/O CPU,TPM,3G S.P	MB.TW706.001
	MAIN BOARD HM55 UMA W/CARD READER BT, W/ O CPU RAM, FOR NON-3G	ZR9 MB(UMA/BT)W/O CPU,TPM,3G S.P	MB.TW606.001
	MAIN BOARD HM55 N11P W/CARD READER BT, W/ O CPU RAM, FOR 3G	ZR9 MB(N11P/SAM/BT/3G)W/O CPU,TPM S.P	MB.TZ506.001
	MAIN BOARD HM55 N11M W/CARD READER BT, W/ O CPU RAM, FOR 3G	ZR9 MB(N11M/HYN/BT/3G)W/O CPU,TPM S.P	MB.TXP06.001
	MAIN BOARD HM55 UMA W/CARD READER BT, W/ O CPU RAM, FOR 3G	ZR9 MB(UMA/BT/3G)W/O CPU,TPM S.P	MB.TXN06.001
MEMORY			
	Memory ELPIDA SO-DIMM DDRIII 1066 1GB EBJ10UE8BDS0-AE-F LF 128*8 0.065um	ZE8 RAM(1GB)DDR3 EBJ10UE8BDS0-AE-F S.P	KN.1GB09.012
	Memory SAMSUNG SO-DIMM DDRIII 1066 1GB M471B2873EH1-CF8 LF 64*16 0.055um	ZR6 RAM(1G)DDR3 M471B2873EH1-CF8 S.P	KN.1GB0B.028
	Memory HYNIX SO-DIMM DDRIII 1066 1GB HMT112S6BFR6C-G7 N0 LF 64*16 0.055um	ZE9 RAM(1GB)DDR3 HMT112S6BFR6C N0 LF S.P	KN.1GB0G.025
	Memory ELPIDA SO-DIMM DDRIII 1066 2GB EBJ21UE8BDS0-AE-F LF 128*8 0.065um	ZE8 RAM(2GB)DDR3 EBJ21UE8BDS0-AE-F S.P	KN.2GB09.006

Category	Part Name	Description	Acer Part No.
	Memory SAMSUNG SO-DIMM DDRIII 1066 4GB M471B5273BH1-CF8 LF 256*8 0.055um	ZE8 RAM(4GB) DDR3 M471B5273BH1-CF8 S.P	KN.4GB0B.007
	Memory ELPIDA SO-DIMM DDRIII 1333 1GB EBJ10UE8BDS0-DJ-F LF 128*8 0.065um	ZQ1 RAM(1GB)DDR3 EBJ10UE8BDS0-DJ-F S.P	KN.1GB09.015
	Memory SAMSUNG SO-DIMM DDRIII 1333 1GB M471B2873FHS-CH9 LF 128*8 46nm	ZQ1 RAM(1GB)DDR3 M471B2873FHS-CH9 S.P	KN.1GB0B.035
	Memory HYNIX SO-DIMM DDRIII 1333 1GB HMT112S6TFR8C-H9 LF 128*8 0.055um	ZR9 RAM(1GB)DDR3 HMT112S6TFR8C-H9 S.P	KN.1GB0G.026
	Memory KINGSTON SO-DIMM DDRIII 1333 2GB ACR256X64D3S1333C9 LF 128*8 0.065um	ZYD RAM 2G DDRIII ACR256X64D3S1333C9 S.P	KN.2GB07.004
	Memory HYNIX SO-DIMM DDRIII 1333 2GB HMT125S6TFR8C-H9 LF 128*8 0.055um	ZYD RAM(2GB)DDR3 HMT125S6TFR8C-H9 S.P	KN.2GB0G.016
	Memory NANYA SO-DIMM DDRIII 1333 2GB NT2GC64B8HC0NS-CG LF 128*8 0.065um	ZQ2 RAM(2GB)DDR3 NT2GC64B8HC0NS-CG S.P	KN.2GB03.017
	Memory ELPIDA SO-DIMM DDRIII 1333 2GB EBJ21UE8BDS0-DJ-F LF 128*8 0.065um	ZQ1 RAM(2GB)DDR3 EBJ21UE8BDS0-DJ-F S.P	KN.2GB09.007
	Memory SAMSUNG SO-DIMM DDRIII 1333 2GB M471B5673FH0-CH9 LF 128*8 46nm	ZQ1 RAM(2GB)DDR3 M471B5673FH0-CH9 S.P	KN.2GB0B.023
	Memory ELPIDA SO-DIMM DDRIII 1333 4GB EBJ41UF8BAS0-DJ-F LF 256*8 0.055um	ZQ1 RAM(4GB)DDR3 EBJ41UF8BAS0-DJ-F S.P	KN.4GB09.001
	Memory SAMSUNG SO-DIMM DDRIII 1333 4GB M471B5273CH0-CH9 LF 256*8 46nm	ZQ2 RAM(4GB)DDR3 M471B5273CH0-CH9S.P	KN.4GB0B.010
HEATSINK			
	THERMAL MODULE 35W FOR UMA	ZR9 THERMAL MODULE ASSY 35W UMA S/P	60.TWG07.009
	THERMAL MODULE 35W FOR DIS	ZR9 THERMAL MODULE ASSY 35W DISS/P	60.TWG07.010

Category	Part Name	Description	Acer Part No.
	HEAT SINK	ZR9 HEAT SINK PCH S/P	33.TWG07.002
SPEAKER			
	SPEAKER SET (W/ L/R)	ZR9 SPEAKER MODULE ASSY (WITH L/R)S/P	23.TWG07.001
MISCELLANEOUS			
	RUBBER - BASE DOOR	ZR9 DOOR-RUB S/P	47.TWG07.002
	RUBBER - LCD BEZEL SIDE	ZR9 BEZEL SIDE RUBBER S/P	47.TWG07.003
	RUBBER - LCD BEZEL TOP	ZR9 BEZEL TOP RUBBER S/P	47.TWG07.004
	RUBBER - BASE	ZR9 BASE-RUBBER S/P	47.TWG07.005
	SCREW RUBBER - BASE R	ZR9 BASE-SRW-RUB-1S/P	47.TWG07.007
	SCREW RUBBER - BASE L	ZR9 BASE-SRW-RUB-2 S/P	47.TWG07.008
	SCREW RUBBER - BASE MIDDLE	ZR9 BASE-SRW-RUB-3 S/P	47.TWG07.009
	LCD BEZEL SCREW MYLAR	ZYD BEZEL SCREW MYLAR S.P	47.TVM07.008
	MYLAR FOR NON SIM CARD	ZR9 NON-SIM-CARD-MYLAR S/P	47.TWG07.006
	KB STANDOFF	ZR9 KB STANDOF S/P	47.TWG07.001

Screw List

Screws	Part Name	Description	Acer Part No..
SCREW			
	SCREW M2.5*3.0-I(BZN)	ZY2 SCREW M2.5*3.0-I(BZN) S.P	86.TPK07.003
	SCREW M2.0*3.0-I(BKAG)(NYLOK) IRON	ZY6 SCREW M2.0*3.0-I(BKAG)(NYLOK) IRON S.P	86.ARE07.002
	SCREW M2.5*4.0-I(BZN)(NYLOK)IRON T=0.5	SCREW M2.5*4.0-I(BZN)(NYLOK)IRON T=0.5	86.PTN07.004
	SCREW M2.5*5.0-I(BZN)	ZY2 SCREW M2.5*5.0-I(BZN) S.P	86.ARE07.003
	SCREW M3*0.5+3.5I	ZY5D SCREW M3*0.5+3.5I S.P	86.N1407.007
	SCREW M2.5*3.0-I(ZN) T=0.5	ZQ1 SCREW M2.5*3.0-I(ZN) T=0.5 S.P	86.PSR07.002

Model Definition and Configuration

Acer TravelMateTM8572

Model	RO	Country	Acer Part No	Description
TM8572-332G16Mi	WW	GCTWN	S2.TW603.003	TM8572-332G16Mi W7PR32TWW1 MC UMACFkk_3 2*1G/160/6L3.0/5R/bg_FP_1.3C_MA_ES61
TM8572-332G16Mi	WW	WW	S2.TW603.004	TM8572-332G16Mi W7PR32TWW1 MC UMACFkk_3 2*1G/160/6L3.0/5R/bg_FP_1.3C_MA_ES62
TM8572-332G16Mn	WW	GCTWN	S2.TW603.001	TM8572-332G16Mn W7PR32TWW1 MC UMACFkk_3V3 1*2G/160/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-332G16Mn	WW	GCTWN	S2.TW603.005	TM8572-332G16Mn W7PR32TWW1 MC UMACFkk_3 2*1G/160/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-332G16Mn	WW	GCTWN	S2.TWF03.001	TM8572-332G16Mn W7PR32TWW1 MC UMACKk_3V3 1*2G/160/6L3.0/5R/bgn_1.3C_MA_ES61
TM8572-332G16Mn	EMEA	South Africa	LX.TW603.001	TM8572-332G16Mn EM W7PR32EMTRZA2 MC XPP UMACFkk_3 1*2G/160/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-332G16Mn	WW	WW	S2.TW603.002	TM8572-332G16Mn W7PR32TWW1 MC UMACFkk_3V3 1*2G/160/6L3.0/5R/bgn_FP_1.3C_MA_ES62
TM8572-332G16Mn	WW	WW	S2.TW603.006	TM8572-332G16Mn W7PR32TWW1 MC UMACFkk_3 2*1G/160/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES62
TM8572-332G16Mn	WW	WW	S2.TWF03.002	TM8572-332G16Mn W7PR32TWW1 MC UMACKk_3V3 1*2G/160/6L3.0/5R/bgn_1.3C_MA_ES62
TM8572-332G16Mnkk	AAP	India	LX.TW603.164	TM8572-332G16Mnkk W7PR32INTRIN1 MC XPP UMACFkk_3 1*2G/160/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-332G25Mn	WW	GCTWN	S2.TXN03.001	TM8572-332G25Mn W7PR32TWW1 MC UMAGCFkk_3 2*1G/250/BT/6L3.0/5R/bgn_FP_1.3C_F33-900_MA_ES61
TM8572-332G25Mn	EMEA	South Africa	LX.TW603.002	TM8572-332G25Mn EM W7PR32EMTRZA2 MC XPP UMACFkk_3 1*2G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-332G25Mn	EMEA	Turkey	LX.TWF03.001	TM8572-332G25Mn EM W7PR32EMTRTR1 MC UMACKk_3 1*2G/250/BT/6L3.0/5R/bgn_1.3C_MA_TR41

Model	RO	Country	Acer Part No	Description
TM8572-332G25Mn	WW	WW	S2.TXN03.002	TM8572-332G25Mn W7PR32TWW1 MC UMAGCFkk_3 2*1G/250/BT/6L3.0/5R/bgn_FP_1.3C_F33-900_MA_ES62
TM8572-332G32Mn	EMEA	Middle East	LX.TW603.023	TM8572-332G32Mn EM W7PR32EMTRME2 MC UMACFkk_3 1*2G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_AR21
TM8572-332G32Mn	EMEA	South Africa	LX.TW603.003	TM8572-332G32Mn EM W7PR32EMTRZA2 MC XPP UMACFkk_3 1*2G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-332G50Mn	EMEA	South Africa	LX.TW603.004	TM8572-332G50Mn EM W7PR32EMTRZA2 MC XPP UMACFkk_3 1*2G/500_L/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-332G64Mn	EMEA	South Africa	LX.TW603.005	TM8572-332G64Mn EM W7PR32EMTRZA2 MC XPP UMACFkk_3 1*2G/640/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-333G32Mnkk	EMEA	Belgium	LX.TW603.184	TM8572-333G32Mnkk W7PR32TRBE1 MC XPP UMACFkk_3 2G+1G/320_7.2K/BT/6L3.0/5R/bgn_FP_1.3C_MA_NL12
TM8572-333G32Mnkk	EMEA	Holland	LX.TW603.183	TM8572-333G32Mnkk W7PR32TRNL1 MC XPP UMACFkk_3 2G+1G/320_7.2K/BT/6L3.0/5R/bgn_FP_1.3C_MA_NL12
TM8572-334G25Mn	EMEA	South Africa	LX.TW603.006	TM8572-334G25Mn EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2*2G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-334G32Mn	EMEA	South Africa	LX.TW603.007	TM8572-334G32Mn EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2*2G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-334G50Mn	EMEA	South Africa	LX.TW603.008	TM8572-334G50Mn EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2*2G/500_L/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-334G50Mnkk	EMEA	Italy	LX.TW603.191	TM8572-334G50Mnkk W7PR32TRIT1 MC XPP UMACFkk_3 2*2G/500_L/BT/6L3.0/5R/bgn_FP_1.3C_MA_IT11
TM8572-334G64Mn	EMEA	South Africa	LX.TW603.009	TM8572-334G64Mn EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2*2G/640/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-352G16Mnkk	AAP	Australia/ New Zealand	LX.TW603.193	TM8572-352G16Mnkk W7PR32TRAU1 MC XPP UMACFkk_3 1*2G/160/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-352G16Mnkk	AAP	India	LX.TW603.163	TM8572-352G16Mnkk W7PR32INTRIN1 MC XPP UMACFkk_3 1*2G/160/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61

Model	RO	Country	Acer Part No	Description
TM8572-352G16Mnkk	EMEA	South Africa	LX.TW603.171	TM8572-352G16Mnkk EM W7PR32EMTRZA2 MC XPP UMACFkk_3 1*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-352G25Mnkk	EMEA	South Africa	LX.TW603.166	TM8572-352G25Mnkk EM W7PR32EMTRZA2 MC XPP UMACFkk_3 1*2G/250_7.2K/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-352G32Mnkk	EMEA	South Africa	LX.TW603.167	TM8572-352G32Mnkk EM W7PR32EMTRZA2 MC XPP UMACFkk_3 1*2G/320_7.2K/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-352G50Mnkk	EMEA	South Africa	LX.TW603.169	TM8572-352G50Mnkk EM W7PR32EMTRZA2 MC XPP UMACFkk_3 1*2G/500_7.2K/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-352G64Mnkk	EMEA	South Africa	LX.TW603.170	TM8572-352G64Mnkk EM W7PR32EMTRZA2 MC XPP UMACFkk_3 1*2G/640/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-353G32Mn	EMEA	Germany	LX.TW603.027	TM8572-353G32Mn W7PR32TRDE1 MC XPP UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_DE62
TM8572-353G32Mnkk	PA	Canada	LX.TW603.161	TM8572-353G32Mnkk W7PR32TRCA2 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_FR82
TM8572-353G32Mnkk	EMEA	UK	LX.TW603.168	TM8572-353G32Mnkk W7PR32TRGB1 MC XPP UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES62
TM8572-354G16Mnkk	EMEA	Algeria	LX.TW603.077	TM8572-354G16Mnkk EM W7PR32EMTRDZ1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES81
TM8572-354G16Mnkk	EMEA	Austria	LX.TW603.039	TM8572-354G16Mnkk W7PR32TRAT1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_DE62
TM8572-354G16Mnkk	EMEA	Baltic	LX.TW603.032	TM8572-354G16Mnkk W7PR32TRBC3 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_SV21
TM8572-354G16Mnkk	EMEA	Baltic	LX.TW603.033	TM8572-354G16Mnkk W7PR32TRBC5 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_LT11
TM8572-354G16Mnkk	EMEA	Baltic	LX.TW603.054	TM8572-354G16Mnkk W7PR32TRBC4 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_LT11
TM8572-354G16Mnkk	EMEA	Belgium	LX.TW603.036	TM8572-354G16Mnkk W7PR32TRBE1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_NL12
TM8572-354G16Mnkk	EMEA	Cyprus	LX.TW603.049	TM8572-354G16Mnkk W7PR32TRCY1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES63

Model	RO	Country	Acer Part No	Description
TM8572-354G16Mnkk	EMEA	Czech	LX.TW603.030	TM8572-354G16Mnkk W7PR32TRCZ2 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_SK12
TM8572-354G16Mnkk	EMEA	Denmark	LX.TW603.031	TM8572-354G16Mnkk W7PR32TRDK2 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_ENS2
TM8572-354G16Mnkk	EMEA	Finland	LX.TW603.038	TM8572-354G16Mnkk W7PR32TRFI2 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_FI12
TM8572-354G16Mnkk	EMEA	France	LX.TW603.043	TM8572-354G16Mnkk W7PR32TRFR1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES82
TM8572-354G16Mnkk	EMEA	Germany	LX.TW603.056	TM8572-354G16Mnkk W7PR32TRDE1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_DE62
TM8572-354G16Mnkk	EMEA	Greece	LX.TW603.044	TM8572-354G16Mnkk W7PR32TRGR1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_EL32
TM8572-354G16Mnkk	EMEA	Holland	LX.TW603.058	TM8572-354G16Mnkk W7PR32TRNL1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_NL12
TM8572-354G16Mnkk	EMEA	Hungary	LX.TW603.045	TM8572-354G16Mnkk W7PR32TRHU1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_HU12
TM8572-354G16Mnkk	EMEA	Israel	LX.TW603.053	TM8572-354G16Mnkk W7PR32TRIL1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_HE53
TM8572-354G16Mnkk	EMEA	Israel	LX.TW603.055	TM8572-354G16Mnkk W7PR32TRIL1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_HE32
TM8572-354G16Mnkk	EMEA	Italy	LX.TW603.042	TM8572-354G16Mnkk W7PR32TRIT1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_IT11
TM8572-354G16Mnkk	EMEA	Latvia	LX.TW603.040	TM8572-354G16Mnkk W7PR32TRLV1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_RU22
TM8572-354G16Mnkk	EMEA	Latvia	LX.TW603.063	TM8572-354G16Mnkk W7PR32TRLV1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_LT11
TM8572-354G16Mnkk	EMEA	Luxembou rg	LX.TW603.061	TM8572-354G16Mnkk W7PR32TRLU3 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_IT42
TM8572-354G16Mnkk	EMEA	Middle East	LX.TW603.064	TM8572-354G16Mnkk EM W7PR32EMTRME6 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-354G16Mnkk	EMEA	Middle East	LX.TW603.065	TM8572-354G16Mnkk EM W7PR32EMTRME9 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES81

Model	RO	Country	Acer Part No	Description
TM8572-354G16Mnkk	EMEA	Middle East	LX.TW603.067	TM8572-354G16Mnkk EM W7PR32EMTRME4 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_RU62
TM8572-354G16Mnkk	EMEA	Middle East	LX.TW603.069	TM8572-354G16Mnkk EM W7PR32EMTRME2 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_AR21
TM8572-354G16Mnkk	EMEA	Middle East	LX.TW603.074	TM8572-354G16Mnkk EM W7PR32EMTRMEB MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-354G16Mnkk	EMEA	Middle East	LX.TW603.075	TM8572-354G16Mnkk EM W7PR32EMTRME3 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES81
TM8572-354G16Mnkk	EMEA	Middle East	LX.TW603.076	TM8572-354G16Mnkk EM W7PR32EMTRMEB MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_ARA1
TM8572-354G16Mnkk	EMEA	Middle East	LX.TW603.078	TM8572-354G16Mnkk EM W7PR32EMTRME2 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_AR11
TM8572-354G16Mnkk	EMEA	Middle East	LX.TW603.079	TM8572-354G16Mnkk EM W7PR32EMTRME9 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_AR52
TM8572-354G16Mnkk	EMEA	Norway	LX.TW603.037	TM8572-354G16Mnkk W7PR32TRNO1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_NO12
TM8572-354G16Mnkk	EMEA	Norway	LX.TW603.062	TM8572-354G16Mnkk W7PR32TRNO3 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_ENS2
TM8572-354G16Mnkk	EMEA	Poland	LX.TW603.060	TM8572-354G16Mnkk W7PR32TRPL1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_PL72
TM8572-354G16Mnkk	EMEA	Portugal	LX.TW603.029	TM8572-354G16Mnkk W7PR32TRPT1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_PT12
TM8572-354G16Mnkk	EMEA	South Africa	LX.TW603.066	TM8572-354G16Mnkk EM W7PR32EMTRZA4 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_ENA1
TM8572-354G16Mnkk	EMEA	South Africa	LX.TW603.068	TM8572-354G16Mnkk EM W7PR32EMTRZA5 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-354G16Mnkk	EMEA	South Africa	LX.TW603.070	TM8572-354G16Mnkk EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61

Model	RO	Country	Acer Part No	Description
TM8572-354G16Mnkk	EMEA	South Africa	LX.TW603.071	TM8572-354G16Mnkk EM W7PR32EMTRZA1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES81
TM8572-354G16Mnkk	EMEA	South Africa	LX.TW603.073	TM8572-354G16Mnkk EM W7PR32EMTRZA6 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_PT11
TM8572-354G16Mnkk	EMEA	South Africa	LX.TXN03.007	TM8572-354G16Mnkk EM W7PR32EMTRZA2 MC XPP UMAGCFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_F33-900_MA_ES61
TM8572-354G16Mnkk	EMEA	Spain	LX.TW603.041	TM8572-354G16Mnkk W7PR32TRES1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES52
TM8572-354G16Mnkk	EMEA	Sweden	LX.TW603.057	TM8572-354G16Mnkk W7PR32TRSE1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_FI12
TM8572-354G16Mnkk	EMEA	Switzerland	LX.TW603.059	TM8572-354G16Mnkk W7PR32TRCH1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_IT42
TM8572-354G16Mnkk	EMEA	Turkey	LX.TW603.072	TM8572-354G16Mnkk EM W7PR32EMTRTR1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_TR41
TM8572-354G16Mnkk	EMEA	UK	LX.TW603.048	TM8572-354G16Mnkk W7PR32TRGB1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES62
TM8572-354G16Mnkk	EMEA	Ukraine	LX.TW603.080	TM8572-354G16Mnkk W7PR32RUTRUK1 MC XPP UMACFkk_3 2*2G/S160G_2.5/BT/6L3.0/5R/bgn_FP_1.3C_MA_RU61
TM8572-354G25Mnkk	EMEA	South Africa	LX.TW603.172	TM8572-354G25Mnkk EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2*2G/250_7.2K/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-354G25Mnkk	EMEA	South Africa	LX.TXN03.004	TM8572-354G25Mnkk EM W7PR32EMTRZA2 MC XPP UMAGCFkk_3 2*2G/250_7.2K/BT/6L3.0/5R/bgn_FP_1.3C_F33-900_MA_ES61
TM8572-354G32Mn	AAP	Australia/New Zealand	LX.TW603.025	TM8572-354G32Mn W7PR32TRAU1 MC UMACFkk_3 1*4G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-354G32Mn	EMEA	South Africa	LX.TW603.018	TM8572-354G32Mn EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2*2G/320/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-354G32Mnkk	AAP	Australia/New Zealand	LX.TW603.160	TM8572-354G32Mnkk W7PR32TRAU1 MC UMACFkk_3 2*2G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61

Model	RO	Country	Acer Part No	Description
TM8572-354G32Mnkk	EMEA	South Africa	LX.TW603.026	TM8572-354G32Mnkk EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2*2G/320_7.2K/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-354G32Mnkk	EMEA	South Africa	LX.TXN03.002	TM8572-354G32Mnkk EM W7PR32EMTRZA2 MC XPP UMAGCFkk_3 2*2G/320_7.2K/BT/6L3.0/5R/bgn_FP_1.3C_F33-900_MA_ES61
TM8572-354G32Mnkk	EMEA	Spain	LX.TW603.182	TM8572-354G32Mnkk W7PR32TRES1 MC XPP UMACFkk_3 2*2G/320/6L3.0/5R/bgn_FP_1.3C_MA_ES52
TM8572-354G50Mnkk	EMEA	South Africa	LX.TW603.173	TM8572-354G50Mnkk EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2*2G/500_7.2K/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-354G50Mnkk	EMEA	South Africa	LX.TXN03.005	TM8572-354G50Mnkk EM W7PR32EMTRZA2 MC XPP UMAGCFkk_3 2*2G/500_7.2K/BT/6L3.0/5R/bgn_FP_1.3C_F33-900_MA_ES61
TM8572-354G64Mnkk	EMEA	South Africa	LX.TW603.174	TM8572-354G64Mnkk EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2*2G/640/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-354G64Mnkk	EMEA	South Africa	LX.TXN03.006	TM8572-354G64Mnkk EM W7PR32EMTRZA2 MC XPP UMAGCFkk_3 2*2G/640/BT/6L3.0/5R/bgn_FP_1.3C_F33-900_MA_ES61
TM8572-432G16Mn	EMEA	South Africa	LX.TW603.020	TM8572-432G16Mn EM W7PR32EMTRZA2 MC XPP UMACFkk_3 1*2G/160/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-432G25Mn	EMEA	South Africa	LX.TW603.010	TM8572-432G25Mn EM W7PR32EMTRZA2 MC XPP UMACFkk_3 1*2G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-432G32Mn	EMEA	South Africa	LX.TW603.011	TM8572-432G32Mn EM W7PR32EMTRZA2 MC XPP UMACFkk_3 1*2G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-432G50Mn	EMEA	South Africa	LX.TW603.012	TM8572-432G50Mn EM W7PR32EMTRZA2 MC XPP UMACFkk_3 1*2G/500_L/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-432G64Mn	EMEA	South Africa	LX.TW603.013	TM8572-432G64Mn EM W7PR32EMTRZA2 MC XPP UMACFkk_3 1*2G/640/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-433G32Mn	EMEA	Turkey	LX.TWF03.002	TM8572-433G32Mn EM W7PR32EMTRTR1 MC UMACKk_3 2G+1G/320/BT/6L3.0/5R/bgn_1.3C_MA_TR41

Model	RO	Country	Acer Part No	Description
TM8572-433G32Mnkk	EMEA	Belgium	LX.TW603.186	TM8572-433G32Mnkk W7PR32TRBE1 MC XPP UMACFkk_3 2G+1G/320_7.2K/BT/9L3.0/5R/bgn_FP_1.3C_MA_NL12
TM8572-433G32Mnkk	EMEA	Holland	LX.TW603.185	TM8572-433G32Mnkk W7PR32TRNL1 MC XPP UMACFkk_3 2G+1G/320_7.2K/BT/9L3.0/5R/bgn_FP_1.3C_MA_NL12
TM8572-434G25Mn	EMEA	South Africa	LX.TW603.014	TM8572-434G25Mn EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2*2G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-434G32Mn	EMEA	South Africa	LX.TW603.015	TM8572-434G32Mn EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2*2G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-434G32Mnkk	EMEA	Germany	LX.TW603.190	TM8572-434G32Mnkk W7PR32TRDE1 MC XPP UMACFkk_3 2*2G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_DE62
TM8572-434G50Mn	EMEA	South Africa	LX.TW603.016	TM8572-434G50Mn EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2*2G/500_L/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-434G64Mn	EMEA	South Africa	LX.TW603.017	TM8572-434G64Mn EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2*2G/640/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-524G25Mnkk	EMEA	South Africa	LX.TW603.179	TM8572-524G25Mnkk EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2*2G/250_7.2K/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-524G32Mn	AAP	Australia/ New Zealand	LX.TXN03.001	TM8572-524G32Mn W7PR32TRAU1 MC XPP UMAGCFkk_3 2*2G/320/BT/6L3.0/5R/bgn_FP_1.3C_F33-900_MA_ES61
TM8572-524G32Mn	PA	USA	LX.TW603.022	TM8572-524G32Mn W7PR32TRUS1 MC UMACFkk_3 2*2G/320_7.2K/BT/6L3.0/5R/bgn_FP_1.3C_MA_FRB3
TM8572-524G32Mnkk	EMEA	South Africa	LX.TW603.180	TM8572-524G32Mnkk EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2*2G/320_7.2K/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-524G50Mnkk	PA	Canada	LX.TW603.162	TM8572-524G50Mnkk W7PR32TRCA2 MC UMACFkk_3 2*2G/500_L/BT/6L3.0/5R/bgn_FP_1.3C_MA_FR82
TM8572-524G50Mnkk	EMEA	South Africa	LX.TW603.181	TM8572-524G50Mnkk EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2*2G/500_7.2K/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-524G64Mnkk	EMEA	South Africa	LX.TW603.178	TM8572-524G64Mnkk EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2*2G/640/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61

Model	RO	Country	Acer Part No	Description
TM8572-542G32Mnkk	EMEA	Middle East	LX.TW603.187	TM8572-542G32Mnkk EM W7PR32EMTRME6 MC XPP UMACFkk_3 1*2G/320/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-542G32Mnkk	EMEA	Middle East	LX.TW603.189	TM8572-542G32Mnkk EM W7PR32EMTSME6 MC XPP UMACFkk_3 1*2G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-544G32Mnkk	AAP	Australia/ New Zealand	LX.TW603.192	TM8572-544G32Mnkk W7PR32TRAU1 MC XPP UMACFkk_3 2*2G/320/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-5452G32Mnkk	EMEA	Middle East	LX.TW603.188	TM8572-5452G32Mnkk EM W7PR32EMTRME6 MC XPP UMACFkk_3 1*2G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-5453G25Mnkk	EMEA	Albania/ Macedonia	LX.TW603.153	TM8572-5453G25Mnkk W7PR32TSAL1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_A111
TM8572-5453G25Mnkk	EMEA	Algeria	LX.TW603.094	TM8572-5453G25Mnkk EM W7PR32EMTRDZ1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES81
TM8572-5453G25Mnkk	EMEA	Austria	LX.TW603.108	TM8572-5453G25Mnkk W7PR32TRAT1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_DE62
TM8572-5453G25Mnkk	EMEA	Austria	LX.TW603.135	TM8572-5453G25Mnkk W7PR32TSAT1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_DE61
TM8572-5453G25Mnkk	EMEA	Baltic	LX.TW603.101	TM8572-5453G25Mnkk W7PR32TRBC3 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_SV21
TM8572-5453G25Mnkk	EMEA	Baltic	LX.TW603.102	TM8572-5453G25Mnkk W7PR32TRBC5 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_LT11
TM8572-5453G25Mnkk	EMEA	Baltic	LX.TW603.129	TM8572-5453G25Mnkk W7PR32TRBC4 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_LT11
TM8572-5453G25Mnkk	EMEA	Baltic	LX.TW603.137	TM8572-5453G25Mnkk W7PR32TSBC4 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_LT11
TM8572-5453G25Mnkk	EMEA	Baltic	LX.TW603.140	TM8572-5453G25Mnkk W7PR32TSBC3 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_SV21
TM8572-5453G25Mnkk	EMEA	Baltic	LX.TW603.156	TM8572-5453G25Mnkk W7PR32TSBC5 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_LT11

Model	RO	Country	Acer Part No	Description
TM8572-5453G25Mnkk	EMEA	Belgium	LX.TW603.105	TM8572-5453G25Mnkk W7PR32TRBE1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_NL12
TM8572-5453G25Mnkk	EMEA	Belgium	LX.TW603.144	TM8572-5453G25Mnkk W7PR32TSBE1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_NL11
TM8572-5453G25Mnkk	EMEA	Cyprus	LX.TW603.124	TM8572-5453G25Mnkk W7PR32TRCY1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_ES63
TM8572-5453G25Mnkk	EMEA	Cyprus	LX.TW603.147	TM8572-5453G25Mnkk W7PR32TSCY1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_ES61
TM8572-5453G25Mnkk	EMEA	Czech	LX.TW603.098	TM8572-5453G25Mnkk W7PR32TRCZ2 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_SK12
TM8572-5453G25Mnkk	EMEA	Czech	LX.TW603.142	TM8572-5453G25Mnkk W7PR32TSCZ2 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_SK11
TM8572-5453G25Mnkk	EMEA	Denmark	LX.TW603.099	TM8572-5453G25Mnkk W7PR32TRDK2 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_ENS2
TM8572-5453G25Mnkk	EMEA	Denmark	LX.TW603.145	TM8572-5453G25Mnkk W7PR32TSDK2 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_ENS1
TM8572-5453G25Mnkk	EMEA	Finland	LX.TW603.107	TM8572-5453G25Mnkk W7PR32TRFI2 MC XPP UMACFkk_3 2G+1G/250/BT/ 6L3.0/5R/bgn_FP_1.3C_MA_FI12
TM8572-5453G25Mnkk	EMEA	Finland	LX.TW603.146	TM8572-5453G25Mnkk W7PR32TSFI2 MC XPP UMACFkk_3 2G+1G/250/BT/ 6L3.0/5R/bgn_FP_1.3C_MA_FI11
TM8572-5453G25Mnkk	EMEA	France	LX.TW603.118	TM8572-5453G25Mnkk W7PR32TRFR1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_ES82
TM8572-5453G25Mnkk	EMEA	France	LX.TW603.149	TM8572-5453G25Mnkk W7PR32TSFR1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_ES81
TM8572-5453G25Mnkk	EMEA	Germany	LX.TW603.131	TM8572-5453G25Mnkk W7PR32TRDE1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_DE62
TM8572-5453G25Mnkk	EMEA	Germany	LX.TW603.150	TM8572-5453G25Mnkk W7PR32TSDE1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_DE61

Model	RO	Country	Acer Part No	Description
TM8572-5453G25Mnkk	EMEA	Greece	LX.TW603.119	TM8572-5453G25Mnkk W7PR32TRGR1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_EL32
TM8572-5453G25Mnkk	EMEA	Greece	LX.TW603.155	TM8572-5453G25Mnkk W7PR32TSGR1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_EL31
TM8572-5453G25Mnkk	EMEA	Holland	LX.TW603.110	TM8572-5453G25Mnkk W7PR32TRNL1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_NL12
TM8572-5453G25Mnkk	EMEA	Holland	LX.TW603.138	TM8572-5453G25Mnkk W7PR32TSNL1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_NL11
TM8572-5453G25Mnkk	EMEA	Hungary	LX.TW603.120	TM8572-5453G25Mnkk W7PR32TRHU1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_HU12
TM8572-5453G25Mnkk	EMEA	Hungary	LX.TW603.151	TM8572-5453G25Mnkk W7PR32TSHU1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_HU11
TM8572-5453G25Mnkk	EMEA	Israel	LX.TW603.128	TM8572-5453G25Mnkk W7PR32TRIL1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_HE53
TM8572-5453G25Mnkk	EMEA	Israel	LX.TW603.130	TM8572-5453G25Mnkk W7PR32TRIL1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_HE32
TM8572-5453G25Mnkk	EMEA	Israel	LX.TW603.157	TM8572-5453G25Mnkk W7PR32TSIL1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_HE61
TM8572-5453G25Mnkk	EMEA	Italy	LX.TW603.117	TM8572-5453G25Mnkk W7PR32TRIT1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_IT11
TM8572-5453G25Mnkk	EMEA	Italy	LX.TW603.141	TM8572-5453G25Mnkk W7PR32TSIT1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_IT11
TM8572-5453G25Mnkk	EMEA	Latvia	LX.TW603.109	TM8572-5453G25Mnkk W7PR32TRLV1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_RU22
TM8572-5453G25Mnkk	EMEA	Latvia	LX.TW603.115	TM8572-5453G25Mnkk W7PR32TRLV1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_LT11
TM8572-5453G25Mnkk	EMEA	Luxembou rg	LX.TW603.113	TM8572-5453G25Mnkk W7PR32TRLU3 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_IT42
TM8572-5453G25Mnkk	EMEA	Luxembou rg	LX.TW603.152	TM8572-5453G25Mnkk W7PR32TSLU3 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_IT41

Model	RO	Country	Acer Part No	Description
TM8572-5453G25Mnkk	EMEA	Middle East	LX.TW603.081	TM8572-5453G25Mnkk EM W7PR32EMTRME6 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_ES61
TM8572-5453G25Mnkk	EMEA	Middle East	LX.TW603.082	TM8572-5453G25Mnkk EM W7PR32EMTRME9 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_ES81
TM8572-5453G25Mnkk	EMEA	Middle East	LX.TW603.084	TM8572-5453G25Mnkk EM W7PR32EMTRME4 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_RU62
TM8572-5453G25Mnkk	EMEA	Middle East	LX.TW603.086	TM8572-5453G25Mnkk EM W7PR32EMTRME2 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_AR21
TM8572-5453G25Mnkk	EMEA	Middle East	LX.TW603.091	TM8572-5453G25Mnkk EM W7PR32EMTRMEB MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_ES61
TM8572-5453G25Mnkk	EMEA	Middle East	LX.TW603.092	TM8572-5453G25Mnkk EM W7PR32EMTRME3 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_ES81
TM8572-5453G25Mnkk	EMEA	Middle East	LX.TW603.093	TM8572-5453G25Mnkk EM W7PR32EMTRMEB MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_ARA1
TM8572-5453G25Mnkk	EMEA	Middle East	LX.TW603.095	TM8572-5453G25Mnkk EM W7PR32EMTRME2 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_AR11
TM8572-5453G25Mnkk	EMEA	Middle East	LX.TW603.096	TM8572-5453G25Mnkk EM W7PR32EMTRME9 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_AR52
TM8572-5453G25Mnkk	EMEA	Norway	LX.TW603.106	TM8572-5453G25Mnkk W7PR32TRNO1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_NO12
TM8572-5453G25Mnkk	EMEA	Norway	LX.TW603.114	TM8572-5453G25Mnkk W7PR32TRNO3 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_ENS2
TM8572-5453G25Mnkk	EMEA	Norway	LX.TW603.139	TM8572-5453G25Mnkk W7PR32TSNO1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_NO11
TM8572-5453G25Mnkk	EMEA	Norway	LX.TW603.143	TM8572-5453G25Mnkk W7PR32TSNO3 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/ bgn_FP_1.3C_MA_ENS1

Model	RO	Country	Acer Part No	Description
TM8572-5453G25Mnkk	EMEA	Poland	LX.TW603.112	TM8572-5453G25Mnkk W7PR32TRPL1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_PL72
TM8572-5453G25Mnkk	EMEA	Poland	LX.TW603.133	TM8572-5453G25Mnkk W7PR32TSPL1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_PL71
TM8572-5453G25Mnkk	EMEA	Portugal	LX.TW603.097	TM8572-5453G25Mnkk W7PR32TRPT1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_PT12
TM8572-5453G25Mnkk	EMEA	Portugal	LX.TW603.136	TM8572-5453G25Mnkk W7PR32TSPT1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_PT11
TM8572-5453G25Mnkk	EMEA	South Africa	LX.TW603.083	TM8572-5453G25Mnkk EM W7PR32EMTRZA4 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_ENA1
TM8572-5453G25Mnkk	EMEA	South Africa	LX.TW603.085	TM8572-5453G25Mnkk EM W7PR32EMTRZA5 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-5453G25Mnkk	EMEA	South Africa	LX.TW603.087	TM8572-5453G25Mnkk EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-5453G25Mnkk	EMEA	South Africa	LX.TW603.088	TM8572-5453G25Mnkk EM W7PR32EMTRZA1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES81
TM8572-5453G25Mnkk	EMEA	South Africa	LX.TW603.090	TM8572-5453G25Mnkk EM W7PR32EMTRZA6 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_PT11
TM8572-5453G25Mnkk	EMEA	Spain	LX.TW603.116	TM8572-5453G25Mnkk W7PR32TRES1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES52
TM8572-5453G25Mnkk	EMEA	Spain	LX.TW603.134	TM8572-5453G25Mnkk W7PR32TSES1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES51
TM8572-5453G25Mnkk	EMEA	Sweden	LX.TW603.132	TM8572-5453G25Mnkk W7PR32TRSE1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_FI12
TM8572-5453G25Mnkk	EMEA	Sweden	LX.TW603.158	TM8572-5453G25Mnkk W7PR32TSSE1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_FI11
TM8572-5453G25Mnkk	EMEA	Switzerland	LX.TW603.111	TM8572-5453G25Mnkk W7PR32TRCH1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_IT42

Model	RO	Country	Acer Part No	Description
TM8572-5453G25Mnkk	EMEA	Switzerland	LX.TW603.159	TM8572-5453G25Mnkk W7PR32TSC1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_IT41
TM8572-5453G25Mnkk	EMEA	Turkey	LX.TW603.089	TM8572-5453G25Mnkk EM W7PR32EMTRTR1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_TR41
TM8572-5453G25Mnkk	EMEA	UK	LX.TW603.123	TM8572-5453G25Mnkk W7PR32TRGB1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES62
TM8572-5453G25Mnkk	EMEA	UK	LX.TW603.154	TM8572-5453G25Mnkk W7PR32TSG1 MC XPP UMACFkk_3 2G+1G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-5453G50Mn	PA	ACLA-Spanish	LX.TW603.024	TM8572-5453G50Mn EM W7PR32EMTREA1 MC UMACFkk_3 2G+1G/500_L/6L3.0/5R/bgn_FP_1.3C_MA_ES51
TM8572-5454G25Mnkk	EMEA	South Africa	LX.TW603.175	TM8572-5454G25Mnkk EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2*2G/250_7.2K/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-5454G32Mn	EMEA	Germany	LX.TW603.028	TM8572-5454G32Mn W7PR32TRDE1 MC XPP UMACFkk_3 2*2G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_DE62
TM8572-5454G32Mn	EMEA	Germany	LX.TXN03.003	TM8572-5454G32Mn W7PR32TRDE1 MC XPP UMAGCFkk_3 2*2G/320/BT/9L3.0/5R/bgn_FP_1.3C_F33-900_MA_DE62
TM8572-5454G32Mnkk	EMEA	South Africa	LX.TW603.165	TM8572-5454G32Mnkk EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2*2G/320_7.2K/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-5454G50Mnkk	PA	ACLA-Spanish	LX.TW602.051	TM8572-5454G50Mnkk EM W7HP64EMTREA1 MC UMACFkk_3 2*2G/500_L/9L3.0/5R/bgn_FP_1.3C_MA_ES51
TM8572-5454G50Mnkk	EMEA	South Africa	LX.TW603.176	TM8572-5454G50Mnkk EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2*2G/500_7.2K/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-5454G64Mnkk	EMEA	South Africa	LX.TW603.177	TM8572-5454G64Mnkk EM W7PR32EMTRZA2 MC XPP UMACFkk_3 2*2G/640/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572-624G50Mn	PA	USA	LX.TW603.021	TM8572-624G50Mn W7PR32TRUS1 MC UMACFkk_3 2*2G/500_7.2K/BT/6L3.0/5R/bgn_FP_1.3C_MA_FRB3

Model	Country	Acer Part No	BOM Name	CPU	VGA Chip
TM8572-332G16Mi	GCTWN	S2.TW603.003	TM8572T_UMAC Fkk_3	Ci3330M	UMA
TM8572-332G16Mi	WW	S2.TW603.004	TM8572T_UMAC Fkk_3	Ci3330M	UMA
TM8572-332G16Mn	GCTWN	S2.TW603.001	TM8572T_UMAC Fkk_3	Ci3330M	UMA
TM8572-332G16Mn	GCTWN	S2.TW603.005	TM8572T_UMAC Fkk_3	Ci3330M	UMA
TM8572-332G16Mn	GCTWN	S2.TWF03.001	TM8572T_UMAC kk_3	Ci3330M	UMA
TM8572-332G16Mn	South Africa	LX.TW603.001	TM8572T_UMAC Fkk_3	Ci3330M	UMA
TM8572-332G16Mn	WW	S2.TW603.002	TM8572T_UMAC Fkk_3	Ci3330M	UMA
TM8572-332G16Mn	WW	S2.TW603.006	TM8572T_UMAC Fkk_3	Ci3330M	UMA
TM8572-332G16Mn	WW	S2.TWF03.002	TM8572T_UMAC kk_3	Ci3330M	UMA
TM8572-332G16Mnkk	India	LX.TW603.164	TM8572T_UMAC Fkk_3	Ci3330M	UMA
TM8572-332G25Mn	GCTWN	S2.TXN03.001	TM8572_UMAG CFkk_3	Ci3330M	UMA
TM8572-332G25Mn	South Africa	LX.TW603.002	TM8572T_UMAC Fkk_3	Ci3330M	UMA
TM8572-332G25Mn	Turkey	LX.TWF03.001	TM8572T_UMAC kk_3	Ci3330M	UMA
TM8572-332G25Mn	WW	S2.TXN03.002	TM8572_UMAG CFkk_3	Ci3330M	UMA
TM8572-332G32Mn	Middle East	LX.TW603.023	TM8572T_UMAC Fkk_3	Ci3330M	UMA
TM8572-332G32Mn	South Africa	LX.TW603.003	TM8572T_UMAC Fkk_3	Ci3330M	UMA
TM8572-332G50Mn	South Africa	LX.TW603.004	TM8572T_UMAC Fkk_3	Ci3330M	UMA
TM8572-332G64Mn	South Africa	LX.TW603.005	TM8572T_UMAC Fkk_3	Ci3330M	UMA
TM8572-333G32Mnkk	Belgium	LX.TW603.184	TM8572T_UMAC Fkk_3	Ci3330M	UMA
TM8572-333G32Mnkk	Holland	LX.TW603.183	TM8572T_UMAC Fkk_3	Ci3330M	UMA
TM8572-334G25Mn	South Africa	LX.TW603.006	TM8572T_UMAC Fkk_3	Ci3330M	UMA
TM8572-334G32Mn	South Africa	LX.TW603.007	TM8572T_UMAC Fkk_3	Ci3330M	UMA
TM8572-334G50Mn	South Africa	LX.TW603.008	TM8572T_UMAC Fkk_3	Ci3330M	UMA
TM8572-334G50Mnkk	Italy	LX.TW603.191	TM8572T_UMAC Fkk_3	Ci3330M	UMA

Model	Country	Acer Part No	BOM Name	CPU	VGA Chip
TM8572-334G64Mn	South Africa	LX.TW603.009	TM8572T_UMAC Fkk_3	Ci3330M	UMA
TM8572-352G16Mnkk	Australia/ New Zealand	LX.TW603.193	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-352G16Mnkk	India	LX.TW603.163	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-352G16Mnkk	South Africa	LX.TW603.171	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-352G25Mnkk	South Africa	LX.TW603.166	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-352G32Mnkk	South Africa	LX.TW603.167	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-352G50Mnkk	South Africa	LX.TW603.169	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-352G64Mnkk	South Africa	LX.TW603.170	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-353G32Mn	Germany	LX.TW603.027	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-353G32Mnkk	Canada	LX.TW603.161	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-353G32Mnkk	UK	LX.TW603.168	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Algeria	LX.TW603.077	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Austria	LX.TW603.039	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Baltic	LX.TW603.032	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Baltic	LX.TW603.033	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Baltic	LX.TW603.054	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Belgium	LX.TW603.036	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Cyprus	LX.TW603.049	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Czech	LX.TW603.030	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Denmark	LX.TW603.031	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Finland	LX.TW603.038	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	France	LX.TW603.043	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Germany	LX.TW603.056	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Greece	LX.TW603.044	TM8572T_UMAC Fkk_3	Ci3350M	UMA

Model	Country	Acer Part No	BOM Name	CPU	VGA Chip
TM8572-354G16Mnkk	Holland	LX.TW603.058	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Hungary	LX.TW603.045	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Israel	LX.TW603.053	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Israel	LX.TW603.055	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Italy	LX.TW603.042	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Latvia	LX.TW603.040	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Latvia	LX.TW603.063	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Luxembou rg	LX.TW603.061	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Middle East	LX.TW603.064	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Middle East	LX.TW603.065	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Middle East	LX.TW603.067	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Middle East	LX.TW603.069	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Middle East	LX.TW603.074	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Middle East	LX.TW603.075	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Middle East	LX.TW603.076	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Middle East	LX.TW603.078	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Middle East	LX.TW603.079	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Norway	LX.TW603.037	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Norway	LX.TW603.062	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Poland	LX.TW603.060	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Portugal	LX.TW603.029	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	South Africa	LX.TW603.066	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	South Africa	LX.TW603.068	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	South Africa	LX.TW603.070	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	South Africa	LX.TW603.071	TM8572T_UMAC Fkk_3	Ci3350M	UMA

Model	Country	Acer Part No	BOM Name	CPU	VGA Chip
TM8572-354G16Mnkk	South Africa	LX.TW603.073	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	South Africa	LX.TXN03.007	TM8572_UMAG CFkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Spain	LX.TW603.041	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Sweden	LX.TW603.057	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Switzerland	LX.TW603.059	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Turkey	LX.TW603.072	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	UK	LX.TW603.048	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G16Mnkk	Ukraine	LX.TW603.080	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G25Mnkk	South Africa	LX.TW603.172	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G25Mnkk	South Africa	LX.TXN03.004	TM8572_UMAG CFkk_3	Ci3350M	UMA
TM8572-354G32Mn	Australia/ New Zealand	LX.TW603.025	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G32Mn	South Africa	LX.TW603.018	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G32Mnkk	Australia/ New Zealand	LX.TW603.160	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G32Mnkk	South Africa	LX.TW603.026	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G32Mnkk	South Africa	LX.TXN03.002	TM8572_UMAG CFkk_3	Ci3350M	UMA
TM8572-354G32Mnkk	Spain	LX.TW603.182	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G50Mnkk	South Africa	LX.TW603.173	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G50Mnkk	South Africa	LX.TXN03.005	TM8572_UMAG CFkk_3	Ci3350M	UMA
TM8572-354G64Mnkk	South Africa	LX.TW603.174	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572-354G64Mnkk	South Africa	LX.TXN03.006	TM8572_UMAG CFkk_3	Ci3350M	UMA
TM8572-432G16Mn	South Africa	LX.TW603.020	TM8572T_UMAC Fkk_3	Ci5430M	UMA
TM8572-432G25Mn	South Africa	LX.TW603.010	TM8572T_UMAC Fkk_3	Ci5430M	UMA
TM8572-432G32Mn	South Africa	LX.TW603.011	TM8572T_UMAC Fkk_3	Ci5430M	UMA
TM8572-432G50Mn	South Africa	LX.TW603.012	TM8572T_UMAC Fkk_3	Ci5430M	UMA

Model	Country	Acer Part No	BOM Name	CPU	VGA Chip
TM8572-432G64Mn	South Africa	LX.TW603.013	TM8572T_UMAC Fkk_3	Ci5430M	UMA
TM8572-433G32Mn	Turkey	LX.TWF03.002	TM8572T_UMAC kk_3	Ci5430M	UMA
TM8572-433G32Mnkk	Belgium	LX.TW603.186	TM8572T_UMAC Fkk_3	Ci5430M	UMA
TM8572-433G32Mnkk	Holland	LX.TW603.185	TM8572T_UMAC Fkk_3	Ci5430M	UMA
TM8572-434G25Mn	South Africa	LX.TW603.014	TM8572T_UMAC Fkk_3	Ci5430M	UMA
TM8572-434G32Mn	South Africa	LX.TW603.015	TM8572T_UMAC Fkk_3	Ci5430M	UMA
TM8572-434G32Mnkk	Germany	LX.TW603.190	TM8572T_UMAC Fkk_3	Ci5430M	UMA
TM8572-434G50Mn	South Africa	LX.TW603.016	TM8572T_UMAC Fkk_3	Ci5430M	UMA
TM8572-434G64Mn	South Africa	LX.TW603.017	TM8572T_UMAC Fkk_3	Ci5430M	UMA
TM8572-524G25Mnkk	South Africa	LX.TW603.179	TM8572T_UMAC Fkk_3	Ci5520M	UMA
TM8572-524G32Mn	Australia/ New Zealand	LX.TXN03.001	TM8572_UMAG CFkk_3	Ci5520M	UMA
TM8572-524G32Mn	USA	LX.TW603.022	TM8572T_UMAC Fkk_3	Ci5520M	UMA
TM8572-524G32Mnkk	South Africa	LX.TW603.180	TM8572T_UMAC Fkk_3	Ci5520M	UMA
TM8572-524G50Mnkk	Canada	LX.TW603.162	TM8572T_UMAC Fkk_3	Ci5520M	UMA
TM8572-524G50Mnkk	South Africa	LX.TW603.181	TM8572T_UMAC Fkk_3	Ci5520M	UMA
TM8572-524G64Mnkk	South Africa	LX.TW603.178	TM8572T_UMAC Fkk_3	Ci5520M	UMA
TM8572-542G32Mnkk	Middle East	LX.TW603.187	TM8572T_UMAC Fkk_3	Ci5540M	UMA
TM8572-542G32Mnkk	Middle East	LX.TW603.189	TM8572T_UMAC Fkk_3	Ci5540M	UMA
TM8572-544G32Mnkk	Australia/ New Zealand	LX.TW603.192	TM8572T_UMAC Fkk_3	Ci5540M	UMA
TM8572-5452G32Mnkk	Middle East	LX.TW603.188	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Albania/ Macedonia	LX.TW603.153	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Algeria	LX.TW603.094	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Austria	LX.TW603.108	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Austria	LX.TW603.135	TM8572T_UMAC Fkk_3	Ci5450M	UMA

Model	Country	Acer Part No	BOM Name	CPU	VGA Chip
TM8572-5453G25Mnkk	Baltic	LX.TW603.101	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Baltic	LX.TW603.102	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Baltic	LX.TW603.129	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Baltic	LX.TW603.137	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Baltic	LX.TW603.140	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Baltic	LX.TW603.156	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Belgium	LX.TW603.105	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Belgium	LX.TW603.144	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Cyprus	LX.TW603.124	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Cyprus	LX.TW603.147	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Czech	LX.TW603.098	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Czech	LX.TW603.142	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Denmark	LX.TW603.099	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Denmark	LX.TW603.145	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Finland	LX.TW603.107	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Finland	LX.TW603.146	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	France	LX.TW603.118	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	France	LX.TW603.149	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Germany	LX.TW603.131	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Germany	LX.TW603.150	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Greece	LX.TW603.119	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Greece	LX.TW603.155	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Holland	LX.TW603.110	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Holland	LX.TW603.138	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Hungary	LX.TW603.120	TM8572T_UMAC Fkk_3	Ci5450M	UMA

Model	Country	Acer Part No	BOM Name	CPU	VGA Chip
TM8572-5453G25Mnkk	Hungary	LX.TW603.151	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Israel	LX.TW603.128	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Israel	LX.TW603.130	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Israel	LX.TW603.157	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Italy	LX.TW603.117	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Italy	LX.TW603.141	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Latvia	LX.TW603.109	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Latvia	LX.TW603.115	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Luxembou rg	LX.TW603.113	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Luxembou rg	LX.TW603.152	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Middle East	LX.TW603.081	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Middle East	LX.TW603.082	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Middle East	LX.TW603.084	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Middle East	LX.TW603.086	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Middle East	LX.TW603.091	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Middle East	LX.TW603.092	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Middle East	LX.TW603.093	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Middle East	LX.TW603.095	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Middle East	LX.TW603.096	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Norway	LX.TW603.106	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Norway	LX.TW603.114	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Norway	LX.TW603.139	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Norway	LX.TW603.143	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Poland	LX.TW603.112	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Poland	LX.TW603.133	TM8572T_UMAC Fkk_3	Ci5450M	UMA

Model	Country	Acer Part No	BOM Name	CPU	VGA Chip
TM8572-5453G25Mnkk	Portugal	LX.TW603.097	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Portugal	LX.TW603.136	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	South Africa	LX.TW603.083	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	South Africa	LX.TW603.085	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	South Africa	LX.TW603.087	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	South Africa	LX.TW603.088	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	South Africa	LX.TW603.090	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Spain	LX.TW603.116	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Spain	LX.TW603.134	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Sweden	LX.TW603.132	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Sweden	LX.TW603.158	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Switzerland	LX.TW603.111	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Switzerland	LX.TW603.159	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	Turkey	LX.TW603.089	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	UK	LX.TW603.123	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G25Mnkk	UK	LX.TW603.154	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5453G50Mn	ACLA-Spanish	LX.TW603.024	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5454G25Mnkk	South Africa	LX.TW603.175	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5454G32Mn	Germany	LX.TW603.028	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5454G32Mn	Germany	LX.TXN03.003	TM8572_UMAG CFkk_3	Ci5450M	UMA
TM8572-5454G32Mnkk	South Africa	LX.TW603.165	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5454G50Mnkk	ACLA-Spanish	LX.TW602.051	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5454G50Mnkk	South Africa	LX.TW603.176	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-5454G64Mnkk	South Africa	LX.TW603.177	TM8572T_UMAC Fkk_3	Ci5450M	UMA
TM8572-624G50Mn	USA	LX.TW603.021	TM8572T_UMAC Fkk_3	Ci7620M	UMA

Model	Country	Acer Part No	VRAM 1	Memory 1	Memory 2
TM8572-332G16Mi	GCTWN	S2.TW603.003	N	SO1GBIII10	SO1GBIII10
TM8572-332G16Mi	WW	S2.TW603.004	N	SO1GBIII10	SO1GBIII10
TM8572-332G16Mn	GCTWN	S2.TW603.001	N	SO2GBIII10	N
TM8572-332G16Mn	GCTWN	S2.TW603.005	N	SO1GBIII10	SO1GBIII10
TM8572-332G16Mn	GCTWN	S2.TWF03.001	N	SO2GBIII10	N
TM8572-332G16Mn	South Africa	LX.TW603.001	N	SO2GBIII10	N
TM8572-332G16Mn	WW	S2.TW603.002	N	SO2GBIII10	N
TM8572-332G16Mn	WW	S2.TW603.006	N	SO1GBIII10	SO1GBIII10
TM8572-332G16Mn	WW	S2.TWF03.002	N	SO2GBIII10	N
TM8572-332G16Mnkk	India	LX.TW603.164	N	SO2GBIII10	N
TM8572-332G25Mn	GCTWN	S2.TXN03.001	N	SO1GBIII10	SO1GBIII10
TM8572-332G25Mn	South Africa	LX.TW603.002	N	SO2GBIII10	N
TM8572-332G25Mn	Turkey	LX.TWF03.001	N	SO2GBIII10	N
TM8572-332G25Mn	WW	S2.TXN03.002	N	SO1GBIII10	SO1GBIII10
TM8572-332G32Mn	Middle East	LX.TW603.023	N	SO2GBIII10	N
TM8572-332G32Mn	South Africa	LX.TW603.003	N	SO2GBIII10	N
TM8572-332G50Mn	South Africa	LX.TW603.004	N	SO2GBIII10	N
TM8572-332G64Mn	South Africa	LX.TW603.005	N	SO2GBIII10	N
TM8572-333G32Mnkk	Belgium	LX.TW603.184	N	SO2GBIII10	SO1GBIII10
TM8572-333G32Mnkk	Holland	LX.TW603.183	N	SO2GBIII10	SO1GBIII10
TM8572-334G25Mn	South Africa	LX.TW603.006	N	SO2GBIII10	SO2GBIII10
TM8572-334G32Mn	South Africa	LX.TW603.007	N	SO2GBIII10	SO2GBIII10
TM8572-334G50Mn	South Africa	LX.TW603.008	N	SO2GBIII10	SO2GBIII10
TM8572-334G50Mnkk	Italy	LX.TW603.191	N	SO2GBIII10	SO2GBIII10
TM8572-334G64Mn	South Africa	LX.TW603.009	N	SO2GBIII10	SO2GBIII10
TM8572-352G16Mnkk	Australia/ New Zealand	LX.TW603.193	N	SO2GBIII10	N
TM8572-352G16Mnkk	India	LX.TW603.163	N	SO2GBIII10	N
TM8572-352G16Mnkk	South Africa	LX.TW603.171	N	SO2GBIII10	N

Model	Country	Acer Part No	VRAM 1	Memory 1	Memory 2
TM8572-352G25Mnkk	South Africa	LX.TW603.166	N	SO2GBIII10	N
TM8572-352G32Mnkk	South Africa	LX.TW603.167	N	SO2GBIII10	N
TM8572-352G50Mnkk	South Africa	LX.TW603.169	N	SO2GBIII10	N
TM8572-352G64Mnkk	South Africa	LX.TW603.170	N	SO2GBIII10	N
TM8572-353G32Mn	Germany	LX.TW603.027	N	SO2GBIII10	SO1GBIII10
TM8572-353G32Mnkk	Canada	LX.TW603.161	N	SO2GBIII10	SO1GBIII10
TM8572-353G32Mnkk	UK	LX.TW603.168	N	SO2GBIII10	SO1GBIII10
TM8572-354G16Mnkk	Algeria	LX.TW603.077	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Austria	LX.TW603.039	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Baltic	LX.TW603.032	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Baltic	LX.TW603.033	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Baltic	LX.TW603.054	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Belgium	LX.TW603.036	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Cyprus	LX.TW603.049	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Czech	LX.TW603.030	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Denmark	LX.TW603.031	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Finland	LX.TW603.038	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	France	LX.TW603.043	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Germany	LX.TW603.056	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Greece	LX.TW603.044	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Holland	LX.TW603.058	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Hungary	LX.TW603.045	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Israel	LX.TW603.053	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Israel	LX.TW603.055	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Italy	LX.TW603.042	N	SO2GBIII10	SO2GBIII10

Model	Country	Acer Part No	VRAM 1	Memory 1	Memory 2
TM8572-354G16Mnkk	Latvia	LX.TW603.040	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Latvia	LX.TW603.063	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Luxembourg	LX.TW603.061	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Middle East	LX.TW603.064	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Middle East	LX.TW603.065	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Middle East	LX.TW603.067	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Middle East	LX.TW603.069	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Middle East	LX.TW603.074	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Middle East	LX.TW603.075	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Middle East	LX.TW603.076	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Middle East	LX.TW603.078	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Middle East	LX.TW603.079	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Norway	LX.TW603.037	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Norway	LX.TW603.062	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Poland	LX.TW603.060	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Portugal	LX.TW603.029	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	South Africa	LX.TW603.066	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	South Africa	LX.TW603.068	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	South Africa	LX.TW603.070	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	South Africa	LX.TW603.071	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	South Africa	LX.TW603.073	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	South Africa	LX.TXN03.007	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Spain	LX.TW603.041	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Sweden	LX.TW603.057	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Switzerland	LX.TW603.059	N	SO2GBIII10	SO2GBIII10

Model	Country	Acer Part No	VRAM 1	Memory 1	Memory 2
TM8572-354G16Mnkk	Turkey	LX.TW603.072	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	UK	LX.TW603.048	N	SO2GBIII10	SO2GBIII10
TM8572-354G16Mnkk	Ukraine	LX.TW603.080	N	SO2GBIII10	SO2GBIII10
TM8572-354G25Mnkk	South Africa	LX.TW603.172	N	SO2GBIII10	SO2GBIII10
TM8572-354G25Mnkk	South Africa	LX.TXN03.004	N	SO2GBIII10	SO2GBIII10
TM8572-354G32Mn	Australia/ New Zealand	LX.TW603.025	N	SO4GBIII10	N
TM8572-354G32Mn	South Africa	LX.TW603.018	N	SO2GBIII10	SO2GBIII10
TM8572-354G32Mnkk	Australia/ New Zealand	LX.TW603.160	N	SO2GBIII10	SO2GBIII10
TM8572-354G32Mnkk	South Africa	LX.TW603.026	N	SO2GBIII10	SO2GBIII10
TM8572-354G32Mnkk	South Africa	LX.TXN03.002	N	SO2GBIII10	SO2GBIII10
TM8572-354G32Mnkk	Spain	LX.TW603.182	N	SO2GBIII10	SO2GBIII10
TM8572-354G50Mnkk	South Africa	LX.TW603.173	N	SO2GBIII10	SO2GBIII10
TM8572-354G50Mnkk	South Africa	LX.TXN03.005	N	SO2GBIII10	SO2GBIII10
TM8572-354G64Mnkk	South Africa	LX.TW603.174	N	SO2GBIII10	SO2GBIII10
TM8572-354G64Mnkk	South Africa	LX.TXN03.006	N	SO2GBIII10	SO2GBIII10
TM8572-432G16Mn	South Africa	LX.TW603.020	N	SO2GBIII10	N
TM8572-432G25Mn	South Africa	LX.TW603.010	N	SO2GBIII10	N
TM8572-432G32Mn	South Africa	LX.TW603.011	N	SO2GBIII10	N
TM8572-432G50Mn	South Africa	LX.TW603.012	N	SO2GBIII10	N
TM8572-432G64Mn	South Africa	LX.TW603.013	N	SO2GBIII10	N
TM8572-433G32Mn	Turkey	LX.TWF03.002	N	SO2GBIII10	SO1GBIII10
TM8572-433G32Mnkk	Belgium	LX.TW603.186	N	SO2GBIII10	SO1GBIII10
TM8572-433G32Mnkk	Holland	LX.TW603.185	N	SO2GBIII10	SO1GBIII10
TM8572-434G25Mn	South Africa	LX.TW603.014	N	SO2GBIII10	SO2GBIII10

Model	Country	Acer Part No	VRAM 1	Memory 1	Memory 2
TM8572-434G32Mn	South Africa	LX.TW603.015	N	SO2GBIII10	SO2GBIII10
TM8572-434G32Mnkk	Germany	LX.TW603.190	N	SO2GBIII10	SO2GBIII10
TM8572-434G50Mn	South Africa	LX.TW603.016	N	SO2GBIII10	SO2GBIII10
TM8572-434G64Mn	South Africa	LX.TW603.017	N	SO2GBIII10	SO2GBIII10
TM8572-524G25Mnkk	South Africa	LX.TW603.179	N	SO2GBIII10	SO2GBIII10
TM8572-524G32Mn	Australia/ New Zealand	LX.TXN03.001	N	SO2GBIII10	SO2GBIII10
TM8572-524G32Mn	USA	LX.TW603.022	N	SO2GBIII10	SO2GBIII10
TM8572-524G32Mnkk	South Africa	LX.TW603.180	N	SO2GBIII10	SO2GBIII10
TM8572-524G50Mnkk	Canada	LX.TW603.162	N	SO2GBIII10	SO2GBIII10
TM8572-524G50Mnkk	South Africa	LX.TW603.181	N	SO2GBIII10	SO2GBIII10
TM8572-524G64Mnkk	South Africa	LX.TW603.178	N	SO2GBIII10	SO2GBIII10
TM8572-542G32Mnkk	Middle East	LX.TW603.187	N	SO2GBIII10	N
TM8572-542G32Mnkk	Middle East	LX.TW603.189	N	SO2GBIII10	N
TM8572-544G32Mnkk	Australia/ New Zealand	LX.TW603.192	N	SO2GBIII10	SO2GBIII10
TM8572-5452G32Mnkk	Middle East	LX.TW603.188	N	SO2GBIII10	N
TM8572-5453G25Mnkk	Albania/ Macedonia	LX.TW603.153	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Algeria	LX.TW603.094	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Austria	LX.TW603.108	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Austria	LX.TW603.135	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Baltic	LX.TW603.101	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Baltic	LX.TW603.102	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Baltic	LX.TW603.129	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Baltic	LX.TW603.137	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Baltic	LX.TW603.140	N	SO2GBIII10	SO1GBIII10

Model	Country	Acer Part No	VRAM 1	Memory 1	Memory 2
TM8572-5453G25Mnkk	Baltic	LX.TW603.156	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Belgium	LX.TW603.105	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Belgium	LX.TW603.144	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Cyprus	LX.TW603.124	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Cyprus	LX.TW603.147	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Czech	LX.TW603.098	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Czech	LX.TW603.142	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Denmark	LX.TW603.099	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Denmark	LX.TW603.145	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Finland	LX.TW603.107	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Finland	LX.TW603.146	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	France	LX.TW603.118	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	France	LX.TW603.149	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Germany	LX.TW603.131	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Germany	LX.TW603.150	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Greece	LX.TW603.119	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Greece	LX.TW603.155	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Holland	LX.TW603.110	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Holland	LX.TW603.138	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Hungary	LX.TW603.120	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Hungary	LX.TW603.151	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Israel	LX.TW603.128	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Israel	LX.TW603.130	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Israel	LX.TW603.157	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Italy	LX.TW603.117	N	SO2GBIII10	SO1GBIII10

Model	Country	Acer Part No	VRAM 1	Memory 1	Memory 2
TM8572-5453G25Mnkk	Italy	LX.TW603.141	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Latvia	LX.TW603.109	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Latvia	LX.TW603.115	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Luxembourg	LX.TW603.113	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Luxembourg	LX.TW603.152	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Middle East	LX.TW603.081	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Middle East	LX.TW603.082	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Middle East	LX.TW603.084	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Middle East	LX.TW603.086	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Middle East	LX.TW603.091	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Middle East	LX.TW603.092	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Middle East	LX.TW603.093	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Middle East	LX.TW603.095	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Middle East	LX.TW603.096	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Norway	LX.TW603.106	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Norway	LX.TW603.114	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Norway	LX.TW603.139	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Norway	LX.TW603.143	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Poland	LX.TW603.112	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Poland	LX.TW603.133	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Portugal	LX.TW603.097	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Portugal	LX.TW603.136	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	South Africa	LX.TW603.083	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	South Africa	LX.TW603.085	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	South Africa	LX.TW603.087	N	SO2GBIII10	SO1GBIII10

Model	Country	Acer Part No	VRAM 1	Memory 1	Memory 2
TM8572-5453G25Mnkk	South Africa	LX.TW603.088	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	South Africa	LX.TW603.090	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Spain	LX.TW603.116	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Spain	LX.TW603.134	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Sweden	LX.TW603.132	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Sweden	LX.TW603.158	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Switzerland	LX.TW603.111	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Switzerland	LX.TW603.159	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	Turkey	LX.TW603.089	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	UK	LX.TW603.123	N	SO2GBIII10	SO1GBIII10
TM8572-5453G25Mnkk	UK	LX.TW603.154	N	SO2GBIII10	SO1GBIII10
TM8572-5453G50Mn	ACLA-Spanish	LX.TW603.024	N	SO2GBIII10	SO1GBIII10
TM8572-5454G25Mnkk	South Africa	LX.TW603.175	N	SO2GBIII10	SO2GBIII10
TM8572-5454G32Mn	Germany	LX.TW603.028	N	SO2GBIII10	SO2GBIII10
TM8572-5454G32Mn	Germany	LX.TXN03.003	N	SO2GBIII10	SO2GBIII10
TM8572-5454G32Mnkk	South Africa	LX.TW603.165	N	SO2GBIII10	SO2GBIII10
TM8572-5454G50Mnkk	ACLA-Spanish	LX.TW602.051	N	SO2GBIII10	SO2GBIII10
TM8572-5454G50Mnkk	South Africa	LX.TW603.176	N	SO2GBIII10	SO2GBIII10
TM8572-5454G64Mnkk	South Africa	LX.TW603.177	N	SO2GBIII10	SO2GBIII10
TM8572-624G50Mn	USA	LX.TW603.021	N	SO2GBIII10	SO2GBIII10

Model	Country	Acer Part No	HDD 1(GB)	Wireless LAN1
TM8572-332G16Mi	GCTWN	S2.TW603.003	N160GB5.4KS	3rd WiFi BG
TM8572-332G16Mi	WW	S2.TW603.004	N160GB5.4KS	3rd WiFi BG
TM8572-332G16Mn	GCTWN	S2.TW603.001	N160GB5.4KS	3rd WiFi 2x2 BGN

Model	Country	Acer Part No	HDD 1(GB)	Wireless LAN1
TM8572-332G16Mn	GCTWN	S2.TW603.005	N160GB5.4KS	3rd WiFi 2x2 BGN
TM8572-332G16Mn	GCTWN	S2.TWF03.001	N160GB5.4KS	3rd WiFi 2x2 BGN
TM8572-332G16Mn	South Africa	LX.TW603.001	N160GB5.4KS	3rd WiFi 2x2 BGN
TM8572-332G16Mn	WW	S2.TW603.002	N160GB5.4KS	3rd WiFi 2x2 BGN
TM8572-332G16Mn	WW	S2.TW603.006	N160GB5.4KS	3rd WiFi 2x2 BGN
TM8572-332G16Mn	WW	S2.TWF03.002	N160GB5.4KS	3rd WiFi 2x2 BGN
TM8572-332G16Mnkk	India	LX.TW603.164	N160GB5.4KS	3rd WiFi 2x2 BGN
TM8572-332G25Mn	GCTWN	S2.TXN03.001	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-332G25Mn	South Africa	LX.TW603.002	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-332G25Mn	Turkey	LX.TWF03.001	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-332G25Mn	WW	S2.TXN03.002	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-332G32Mn	Middle East	LX.TW603.023	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572-332G32Mn	South Africa	LX.TW603.003	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572-332G50Mn	South Africa	LX.TW603.004	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572-332G64Mn	South Africa	LX.TW603.005	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572-333G32Mnkk	Belgium	LX.TW603.184	N320GB7.2KS	3rd WiFi 2x2 BGN
TM8572-333G32Mnkk	Holland	LX.TW603.183	N320GB7.2KS	3rd WiFi 2x2 BGN
TM8572-334G25Mn	South Africa	LX.TW603.006	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-334G32Mn	South Africa	LX.TW603.007	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572-334G50Mn	South Africa	LX.TW603.008	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572-334G50Mnkk	Italy	LX.TW603.191	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572-334G64Mn	South Africa	LX.TW603.009	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572-352G16Mnkk	Australia/ New Zealand	LX.TW603.193	N160GB5.4KS	3rd WiFi 2x2 BGN
TM8572-352G16Mnkk	India	LX.TW603.163	N160GB5.4KS	3rd WiFi 2x2 BGN

Model	Country	Acer Part No	HDD 1(GB)	Wireless LAN1
TM8572-352G16Mnkk	South Africa	LX.TW603.171	SSD25160	3rd WiFi 2x2 BGN
TM8572-352G25Mnkk	South Africa	LX.TW603.166	N250GB7.2KS	3rd WiFi 2x2 BGN
TM8572-352G32Mnkk	South Africa	LX.TW603.167	N320GB7.2KS	3rd WiFi 2x2 BGN
TM8572-352G50Mnkk	South Africa	LX.TW603.169	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572-352G64Mnkk	South Africa	LX.TW603.170	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572-353G32Mn	Germany	LX.TW603.027	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572-353G32Mnkk	Canada	LX.TW603.161	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572-353G32Mnkk	UK	LX.TW603.168	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Algeria	LX.TW603.077	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Austria	LX.TW603.039	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Baltic	LX.TW603.032	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Baltic	LX.TW603.033	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Baltic	LX.TW603.054	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Belgium	LX.TW603.036	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Cyprus	LX.TW603.049	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Czech	LX.TW603.030	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Denmark	LX.TW603.031	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Finland	LX.TW603.038	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	France	LX.TW603.043	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Germany	LX.TW603.056	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Greece	LX.TW603.044	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Holland	LX.TW603.058	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Hungary	LX.TW603.045	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Israel	LX.TW603.053	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Israel	LX.TW603.055	SSD25160	3rd WiFi 2x2 BGN

Model	Country	Acer Part No	HDD 1(GB)	Wireless LAN1
TM8572-354G16Mnkk	Italy	LX.TW603.042	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Latvia	LX.TW603.040	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Latvia	LX.TW603.063	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Luxembo urg	LX.TW603.061	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Middle East	LX.TW603.064	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Middle East	LX.TW603.065	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Middle East	LX.TW603.067	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Middle East	LX.TW603.069	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Middle East	LX.TW603.074	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Middle East	LX.TW603.075	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Middle East	LX.TW603.076	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Middle East	LX.TW603.078	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Middle East	LX.TW603.079	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Norway	LX.TW603.037	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Norway	LX.TW603.062	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Poland	LX.TW603.060	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Portugal	LX.TW603.029	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	South Africa	LX.TW603.066	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	South Africa	LX.TW603.068	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	South Africa	LX.TW603.070	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	South Africa	LX.TW603.071	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	South Africa	LX.TW603.073	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	South Africa	LX.TXN03.007	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Spain	LX.TW603.041	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Sweden	LX.TW603.057	SSD25160	3rd WiFi 2x2 BGN

Model	Country	Acer Part No	HDD 1(GB)	Wireless LAN1
TM8572-354G16Mnkk	Switzerland	LX.TW603.059	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Turkey	LX.TW603.072	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	UK	LX.TW603.048	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G16Mnkk	Ukraine	LX.TW603.080	SSD25160	3rd WiFi 2x2 BGN
TM8572-354G25Mnkk	South Africa	LX.TW603.172	N250GB7.2KS	3rd WiFi 2x2 BGN
TM8572-354G25Mnkk	South Africa	LX.TXN03.004	N250GB7.2KS	3rd WiFi 2x2 BGN
TM8572-354G32Mn	Australia/ New Zealand	LX.TW603.025	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572-354G32Mn	South Africa	LX.TW603.018	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572-354G32Mnkk	Australia/ New Zealand	LX.TW603.160	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572-354G32Mnkk	South Africa	LX.TW603.026	N320GB7.2KS	3rd WiFi 2x2 BGN
TM8572-354G32Mnkk	South Africa	LX.TXN03.002	N320GB7.2KS	3rd WiFi 2x2 BGN
TM8572-354G32Mnkk	Spain	LX.TW603.182	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572-354G50Mnkk	South Africa	LX.TW603.173	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572-354G50Mnkk	South Africa	LX.TXN03.005	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572-354G64Mnkk	South Africa	LX.TW603.174	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572-354G64Mnkk	South Africa	LX.TXN03.006	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572-432G16Mn	South Africa	LX.TW603.020	N160GB5.4KS	3rd WiFi 2x2 BGN
TM8572-432G25Mn	South Africa	LX.TW603.010	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-432G32Mn	South Africa	LX.TW603.011	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572-432G50Mn	South Africa	LX.TW603.012	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572-432G64Mn	South Africa	LX.TW603.013	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572-433G32Mn	Turkey	LX.TWF03.002	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572-433G32Mnkk	Belgium	LX.TW603.186	N320GB7.2KS	3rd WiFi 2x2 BGN
TM8572-433G32Mnkk	Holland	LX.TW603.185	N320GB7.2KS	3rd WiFi 2x2 BGN

Model	Country	Acer Part No	HDD 1(GB)	Wireless LAN1
TM8572-434G25Mn	South Africa	LX.TW603.014	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-434G32Mn	South Africa	LX.TW603.015	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572-434G32Mnkk	Germany	LX.TW603.190	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572-434G50Mn	South Africa	LX.TW603.016	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572-434G64Mn	South Africa	LX.TW603.017	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572-524G25Mnkk	South Africa	LX.TW603.179	N250GB7.2KS	3rd WiFi 2x2 BGN
TM8572-524G32Mn	Australia/ New Zealand	LX.TXN03.001	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572-524G32Mn	USA	LX.TW603.022	N320GB7.2KS	3rd WiFi 2x2 BGN
TM8572-524G32Mnkk	South Africa	LX.TW603.180	N320GB7.2KS	3rd WiFi 2x2 BGN
TM8572-524G50Mnkk	Canada	LX.TW603.162	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572-524G50Mnkk	South Africa	LX.TW603.181	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572-524G64Mnkk	South Africa	LX.TW603.178	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572-542G32Mnkk	Middle East	LX.TW603.187	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572-542G32Mnkk	Middle East	LX.TW603.189	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572-544G32Mnkk	Australia/ New Zealand	LX.TW603.192	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5452G32Mnkk	Middle East	LX.TW603.188	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Albania/ Macedonia	LX.TW603.153	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Algeria	LX.TW603.094	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Austria	LX.TW603.108	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Austria	LX.TW603.135	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Baltic	LX.TW603.101	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Baltic	LX.TW603.102	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Baltic	LX.TW603.129	N250GB5.4KS	3rd WiFi 2x2 BGN

Model	Country	Acer Part No	HDD 1(GB)	Wireless LAN1
TM8572-5453G25Mnkk	Baltic	LX.TW603.137	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Baltic	LX.TW603.140	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Baltic	LX.TW603.156	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Belgium	LX.TW603.105	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Belgium	LX.TW603.144	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Cyprus	LX.TW603.124	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Cyprus	LX.TW603.147	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Czech	LX.TW603.098	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Czech	LX.TW603.142	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Denmark	LX.TW603.099	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Denmark	LX.TW603.145	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Finland	LX.TW603.107	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Finland	LX.TW603.146	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	France	LX.TW603.118	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	France	LX.TW603.149	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Germany	LX.TW603.131	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Germany	LX.TW603.150	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Greece	LX.TW603.119	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Greece	LX.TW603.155	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Holland	LX.TW603.110	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Holland	LX.TW603.138	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Hungary	LX.TW603.120	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Hungary	LX.TW603.151	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Israel	LX.TW603.128	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Israel	LX.TW603.130	N250GB5.4KS	3rd WiFi 2x2 BGN

Model	Country	Acer Part No	HDD 1(GB)	Wireless LAN1
TM8572-5453G25Mnkk	Israel	LX.TW603.157	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Italy	LX.TW603.117	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Italy	LX.TW603.141	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Latvia	LX.TW603.109	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Latvia	LX.TW603.115	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Luxembo urg	LX.TW603.113	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Luxembo urg	LX.TW603.152	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Middle East	LX.TW603.081	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Middle East	LX.TW603.082	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Middle East	LX.TW603.084	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Middle East	LX.TW603.086	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Middle East	LX.TW603.091	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Middle East	LX.TW603.092	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Middle East	LX.TW603.093	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Middle East	LX.TW603.095	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Middle East	LX.TW603.096	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Norway	LX.TW603.106	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Norway	LX.TW603.114	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Norway	LX.TW603.139	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Norway	LX.TW603.143	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Poland	LX.TW603.112	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Poland	LX.TW603.133	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Portugal	LX.TW603.097	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Portugal	LX.TW603.136	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	South Africa	LX.TW603.083	N250GB5.4KS	3rd WiFi 2x2 BGN

Model	Country	Acer Part No	HDD 1(GB)	Wireless LAN1
TM8572-5453G25Mnkk	South Africa	LX.TW603.085	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	South Africa	LX.TW603.087	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	South Africa	LX.TW603.088	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	South Africa	LX.TW603.090	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Spain	LX.TW603.116	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Spain	LX.TW603.134	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Sweden	LX.TW603.132	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Sweden	LX.TW603.158	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Switzerland	LX.TW603.111	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Switzerland	LX.TW603.159	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	Turkey	LX.TW603.089	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	UK	LX.TW603.123	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G25Mnkk	UK	LX.TW603.154	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5453G50Mn	ACLA-Spanish	LX.TW603.024	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5454G25Mnkk	South Africa	LX.TW603.175	N250GB7.2KS	3rd WiFi 2x2 BGN
TM8572-5454G32Mn	Germany	LX.TW603.028	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5454G32Mn	Germany	LX.TXN03.003	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5454G32Mnkk	South Africa	LX.TW603.165	N320GB7.2KS	3rd WiFi 2x2 BGN
TM8572-5454G50Mnkk	ACLA-Spanish	LX.TW602.051	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572-5454G50Mnkk	South Africa	LX.TW603.176	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572-5454G64Mnkk	South Africa	LX.TW603.177	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572-624G50Mn	USA	LX.TW603.021	N500GB7.2KS	3rd WiFi 2x2 BGN

Acer TravelMate TM8572G

Model	RO	Country	Acer Part No	Description
TM8572G-332G16Mn	WW	GCTWN	S2.TW703.001	TM8572G-332G16Mn W7PR32TWW1 MC N11MGE1512CFkk_3V3 1*2G/160/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572G-332G16Mn	WW	GCTWN	S2.TW803.001	TM8572G-332G16Mn W7PR32TWW1 MC N10PGE11GBCFkk_3V3 1*2G/160/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572G-332G16Mn	WW	GCTWN	S2.TWH03.001	TM8572G-332G16Mn W7PR32TWW1 MC N10PGE11GBCkk_3V3 1*2G/160/6L3.0/5R/bgn_1.3C_MA_ES61
TM8572G-332G16Mn	WW	GCTWN	S2.TXP02.001	TM8572G-332G16Mn W7HP64TWW1 MC N11MGE1512GCKk_3V3 1*2G/160/BT/6L3.0/5R/bgn_1.3C_F33-900_MA_ES61
TM8572G-332G16Mn	WW	WW	S2.TW703.002	TM8572G-332G16Mn W7PR32TWW1 MC N11MGE1512CFkk_3V3 1*2G/160/6L3.0/5R/bgn_FP_1.3C_MA_ES62
TM8572G-332G16Mn	WW	WW	S2.TW803.002	TM8572G-332G16Mn W7PR32TWW1 MC N10PGE11GBCFkk_3V3 1*2G/160/6L3.0/5R/bgn_FP_1.3C_MA_ES62
TM8572G-332G16Mn	WW	WW	S2.TWH03.002	TM8572G-332G16Mn W7PR32TWW1 MC N10PGE11GBCkk_3V3 1*2G/160/6L3.0/5R/bgn_1.3C_MA_ES62
TM8572G-332G16Mn	WW	WW	S2.TXP02.002	TM8572G-332G16Mn W7HP64TWW1 MC N11MGE1512GCKk_3V3 1*2G/160/BT/6L3.0/5R/bgn_1.3C_F33-900_MA_ES62
TM8572G-332G50Mnkk	TWN	GCTWN	LX.TW803.002	TM8572G-332G50Mnkk W7PR32TRTW1 MC XPP N11PGE11GBCFkk_3V3 1*2G/500_L/BT/6L3.0/5R/bgn_FP_1.3C_MA_TC11
TM8572G-334G32Mn	EMEA	South Africa	LX.TW803.003	TM8572G-334G32Mn EM W7PR32EMTRZA2 MC XPP N11PGE11GBCFkk_3V3 2*2G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572G-334G50Mn	EMEA	South Africa	LX.TW803.004	TM8572G-334G50Mn EM W7PR32EMTRZA2 MC XPP N11PGE11GBCFkk_3V3 2*2G/500_L/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572G-334G64Mn	EMEA	South Africa	LX.TW803.005	TM8572G-334G64Mn EM W7PR32EMTRZA2 MC XPP N11PGE11GBCFkk_3V3 2*2G/640/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572G-353G32Mnkk	EMEA	Albania/Macedonia	LX.TW703.232	TM8572G-353G32Mnkk W7PR32TSAL1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_A111
TM8572G-353G32Mnkk	EMEA	Austria	LX.TW703.182	TM8572G-353G32Mnkk W7PR32TRAT1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_DE62

TM8572G-353G32Mnkk	EMEA	Austria	LX.TW703.208	TM8572G-353G32Mnkk W7PR32TSAT1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_DE61
TM8572G-353G32Mnkk	EMEA	Baltic	LX.TW703.175	TM8572G-353G32Mnkk W7PR32TRBC3 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_SV21
TM8572G-353G32Mnkk	EMEA	Baltic	LX.TW703.176	TM8572G-353G32Mnkk W7PR32TRBC5 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_LT11
TM8572G-353G32Mnkk	EMEA	Baltic	LX.TW703.197	TM8572G-353G32Mnkk W7PR32TRBC4 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_LT11
TM8572G-353G32Mnkk	EMEA	Baltic	LX.TW703.210	TM8572G-353G32Mnkk W7PR32TSBC4 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_LT11
TM8572G-353G32Mnkk	EMEA	Baltic	LX.TW703.219	TM8572G-353G32Mnkk W7PR32TSBC3 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_SV21
TM8572G-353G32Mnkk	EMEA	Baltic	LX.TW703.235	TM8572G-353G32Mnkk W7PR32TSBC5 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_LT11
TM8572G-353G32Mnkk	EMEA	Belgium	LX.TW703.179	TM8572G-353G32Mnkk W7PR32TRBE1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_NL12
TM8572G-353G32Mnkk	EMEA	Belgium	LX.TW703.223	TM8572G-353G32Mnkk W7PR32TSBE1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_NL11
TM8572G-353G32Mnkk	EMEA	Cyprus	LX.TW703.192	TM8572G-353G32Mnkk W7PR32TRCY1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_ES63
TM8572G-353G32Mnkk	EMEA	Cyprus	LX.TW703.226	TM8572G-353G32Mnkk W7PR32TSCY1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572G-353G32Mnkk	EMEA	Czech	LX.TW703.173	TM8572G-353G32Mnkk W7PR32TRCZ2 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_SK12
TM8572G-353G32Mnkk	EMEA	Czech	LX.TW703.221	TM8572G-353G32Mnkk W7PR32TSCZ2 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_SK11

TM8572G-353G32Mnkk	EMEA	Denmark	LX.TW703.174	TM8572G-353G32Mnkk W7PR32TRDK2 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_ENS2
TM8572G-353G32Mnkk	EMEA	Denmark	LX.TW703.224	TM8572G-353G32Mnkk W7PR32TSDK2 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_ENS1
TM8572G-353G32Mnkk	EMEA	Finland	LX.TW703.181	TM8572G-353G32Mnkk W7PR32TRFI2 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/BT/6L3.0/5R/ bgn_FP_1.3C_MA_FI12
TM8572G-353G32Mnkk	EMEA	Finland	LX.TW703.225	TM8572G-353G32Mnkk W7PR32TSFI2 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/BT/6L3.0/5R/ bgn_FP_1.3C_MA_FI11
TM8572G-353G32Mnkk	EMEA	France	LX.TW703.186	TM8572G-353G32Mnkk W7PR32TRFR1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_ES82
TM8572G-353G32Mnkk	EMEA	France	LX.TW703.228	TM8572G-353G32Mnkk W7PR32TSFR1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_ES81
TM8572G-353G32Mnkk	EMEA	Germany	LX.TW703.203	TM8572G-353G32Mnkk W7PR32TRDE1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_DE62
TM8572G-353G32Mnkk	EMEA	Germany	LX.TW703.229	TM8572G-353G32Mnkk W7PR32TSDE1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_DE61
TM8572G-353G32Mnkk	EMEA	Greece	LX.TW703.187	TM8572G-353G32Mnkk W7PR32TRGR1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_EL32
TM8572G-353G32Mnkk	EMEA	Greece	LX.TW703.234	TM8572G-353G32Mnkk W7PR32TSGR1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_EL31
TM8572G-353G32Mnkk	EMEA	Holland	LX.TW703.205	TM8572G-353G32Mnkk W7PR32TRNL1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_NL12
TM8572G-353G32Mnkk	EMEA	Holland	LX.TW703.211	TM8572G-353G32Mnkk W7PR32TSNL1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_NL11
TM8572G-353G32Mnkk	EMEA	Hungary	LX.TW703.188	TM8572G-353G32Mnkk W7PR32TRHU1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_HU12

TM8572G-353G32Mnkk	EMEA	Hungary	LX.TW703.230	TM8572G-353G32Mnkk W7PR32TSHU1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_HU11
TM8572G-353G32Mnkk	EMEA	Israel	LX.TW703.196	TM8572G-353G32Mnkk W7PR32TRIL1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/BT/6L3.0/5R/ bgn_FP_1.3C_MA_HE53
TM8572G-353G32Mnkk	EMEA	Israel	LX.TW703.202	TM8572G-353G32Mnkk W7PR32TRIL1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/BT/6L3.0/5R/ bgn_FP_1.3C_MA_HE32
TM8572G-353G32Mnkk	EMEA	Israel	LX.TW703.236	TM8572G-353G32Mnkk W7PR32TSIL1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/BT/6L3.0/5R/ bgn_FP_1.3C_MA_HE61
TM8572G-353G32Mnkk	EMEA	Italy	LX.TW703.185	TM8572G-353G32Mnkk W7PR32TRIT1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/BT/6L3.0/5R/ bgn_FP_1.3C_MA_IT11
TM8572G-353G32Mnkk	EMEA	Italy	LX.TW703.220	TM8572G-353G32Mnkk W7PR32TSIT1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/BT/6L3.0/5R/ bgn_FP_1.3C_MA_IT11
TM8572G-353G32Mnkk	EMEA	Latvia	LX.TW703.183	TM8572G-353G32Mnkk W7PR32TRLV1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_RU22
TM8572G-353G32Mnkk	EMEA	Latvia	LX.TW703.201	TM8572G-353G32Mnkk W7PR32TRLV1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_LT11
TM8572G-353G32Mnkk	EMEA	Luxembou rg	LX.TW703.198	TM8572G-353G32Mnkk W7PR32TRLU3 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_IT42
TM8572G-353G32Mnkk	EMEA	Luxembou rg	LX.TW703.231	TM8572G-353G32Mnkk W7PR32TSLU3 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_IT41
TM8572G-353G32Mnkk	EMEA	Norway	LX.TW703.180	TM8572G-353G32Mnkk W7PR32TRNO1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_NO12
TM8572G-353G32Mnkk	EMEA	Norway	LX.TW703.199	TM8572G-353G32Mnkk W7PR32TRNO3 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_ENS2
TM8572G-353G32Mnkk	EMEA	Norway	LX.TW703.216	TM8572G-353G32Mnkk W7PR32TSNO1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_NO11

TM8572G-353G32Mnkk	EMEA	Norway	LX.TW703.222	TM8572G-353G32Mnkk W7PR32TSNO3 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_ENS1
TM8572G-353G32Mnkk	EMEA	Poland	LX.TW703.207	TM8572G-353G32Mnkk W7PR32TRPL1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_PL72
TM8572G-353G32Mnkk	EMEA	Poland	LX.TW703.217	TM8572G-353G32Mnkk W7PR32TSPL1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_PL71
TM8572G-353G32Mnkk	EMEA	Portugal	LX.TW703.172	TM8572G-353G32Mnkk W7PR32TRPT1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_PT12
TM8572G-353G32Mnkk	EMEA	Portugal	LX.TW703.209	TM8572G-353G32Mnkk W7PR32TSPT1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_PT11
TM8572G-353G32Mnkk	EMEA	Spain	LX.TW703.184	TM8572G-353G32Mnkk W7PR32TRES1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_ES52
TM8572G-353G32Mnkk	EMEA	Spain	LX.TW703.218	TM8572G-353G32Mnkk W7PR32TSES1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_ES51
TM8572G-353G32Mnkk	EMEA	Sweden	LX.TW703.204	TM8572G-353G32Mnkk W7PR32TRSE1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_FI12
TM8572G-353G32Mnkk	EMEA	Sweden	LX.TW703.237	TM8572G-353G32Mnkk W7PR32TSSE1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_FI11
TM8572G-353G32Mnkk	EMEA	Switzerlan d	LX.TW703.206	TM8572G-353G32Mnkk W7PR32TRCH1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_IT42
TM8572G-353G32Mnkk	EMEA	Switzerlan d	LX.TW703.238	TM8572G-353G32Mnkk W7PR32TSCH1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_IT41
TM8572G-353G32Mnkk	EMEA	UK	LX.TW703.191	TM8572G-353G32Mnkk W7PR32TRGB1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_ES62
TM8572G-353G32Mnkk	EMEA	UK	LX.TW703.233	TM8572G-353G32Mnkk W7PR32TSGB1 MC XPP N11MGE1512CFkk_3V3 2G+1G/320/ BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572G-354G32Mn	EMEA	Spain	LX.TW803.010	TM8572G-354G32Mn W7PR32TRES1 MC N11PGE11GBCFkk_3V3 2*2G/320/ 6L3.0/5R/bgn_FP_1.3C_MA_ES52

TM8572G-354G50Mnkk	EMEA	Switzerland	LX.TXP03.002	TM8572G-354G50Mnkk W7PR32TRCH1 MC XPP N11MGE1512GCKk_3V3 2*2G/500_L/ BT/9L3.0/5R/bgn_1.3C_F33-900_MA_IT42
TM8572G-432G50Mnkk	TWN	GCTWN	LX.TW803.001	TM8572G-432G50Mnkk W7PR32TRTW1 MC XPP N11PGE11GBCFkk_3V3 1*2G/500_L/ BT/6L3.0/5R/bgn_FP_1.3C_MA_TC11
TM8572G-434G25Mn	WW	GCTWN	S2.TW703.003	TM8572G-434G25Mn W7PR32TWW1 MC N11MGE1512CFkk_3V3 2*2G/250/ 6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572G-434G25Mn	WW	GCTWN	S2.TW703.005	TM8572G-434G25Mn W7PR32TWW1 MC N11MGE1512CFkk_3V3 2*2G/250/ BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572G-434G25Mn	EMEA	South Africa	LX.TW803.009	TM8572G-434G25Mn EM W7PR32EMTRZA2 MC XPP N11PGE11GBCFkk_3V3 2*2G/250/BT/ 6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572G-434G25Mn	WW	WW	S2.TW703.004	TM8572G-434G25Mn W7PR32TWW1 MC N11MGE1512CFkk_3V3 2*2G/250/ 6L3.0/5R/bgn_FP_1.3C_MA_ES62
TM8572G-434G25Mn	WW	WW	S2.TW703.006	TM8572G-434G25Mn W7PR32TWW1 MC N11MGE1512CFkk_3V3 2*2G/250/ BT/6L3.0/5R/bgn_FP_1.3C_MA_ES62
TM8572G-434G32Mn	EMEA	South Africa	LX.TW803.008	TM8572G-434G32Mn EM W7PR32EMTRZA2 MC XPP N11PGE11GBCFkk_3V3 2*2G/320/BT/ 6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572G-434G32Mn	EMEA	South Africa	LX.TWH03.001	TM8572G-434G32Mn EM W7PR32EMTRZA2 MC N11PGE11GBCkk_3V3 2*2G/320/BT/ 6L3.0/5R/bgn_1.3C_MA_ES61
TM8572G-434G50Mn	EMEA	South Africa	LX.TW803.007	TM8572G-434G50Mn EM W7PR32EMTRZA2 MC XPP N11PGE11GBCFkk_3V3 2*2G/500_L/ BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572G-434G50Mnkk	EMEA	Germany	LX.TW802.003	TM8572G-434G50Mnkk W7HP64TRDE1 MC N11PGE11GBCFkk_3V3 2*2G/500_L/ BT/6L3.0/5R/bgn_FP_1.3C_MA_DE61
TM8572G-434G64Mn	EMEA	South Africa	LX.TW803.006	TM8572G-434G64Mn EM W7PR32EMTRZA2 MC XPP N11PGE11GBCFkk_3V3 2*2G/640/BT/ 6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572G-434G64Mnkk	EMEA	Germany	LX.TW802.004	TM8572G-434G64Mnkk W7HP64TRDE1 MC N11PGE11GBCFkk_3V3 2*2G/640/BT/ 6L3.0/5R/bgn_FP_1.3C_MA_DE61
TM8572G-524G25Mn	WW	GCTWN	S2.TW803.005	TM8572G-524G25Mn W7PR32TWW1 MC N11PGE11GBCFkk_3V3 2*2G/250/ 6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572G-524G25Mn	WW	GCTWN	S2.TW803.009	TM8572G-524G25Mn W7PR32TWW1 MC N11PGE11GBCFkk_3V3 2*2G/250/ BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61

TM8572G-524G25Mn	WW	WW	S2.TW803.006	TM8572G-524G25Mn W7PR32TWW1 MC N11PGE11GBCFkk_3V3 2*2G/250/6L3.0/5R/bgn_FP_1.3C_MA_ES62
TM8572G-524G25Mn	WW	WW	S2.TW803.010	TM8572G-524G25Mn W7PR32TWW1 MC N11PGE11GBCFkk_3V3 2*2G/250/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES62
TM8572G-524G32Mnkk	AAP	Australia/ New Zealand	LX.TW803.012	TM8572G-524G32Mnkk W7PR32TRAU1 MC XPP N11PGE11GBCFkk_3V3 2*2G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572G-524G32Mnkk	AAP	Australia/ New Zealand	LX.TXP03.001	TM8572G-524G32Mnkk W7PR32TRAU1 MC XPP N11MGE1512GCKk_3V3 2*2G/320/BT/6L3.0/5R/bgn_1.3C_F33-900_MA_ES61
TM8572G-524G50Mnkk	AAP	Australia/ New Zealand	LX.TW803.015	TM8572G-524G50Mnkk W7PR32TRAU1 MC XPP N11PGE11GBCFkk_3V3 2*2G/500_L/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572G-524G50Mnkk	PA	Canada	LX.TW803.013	TM8572G-524G50Mnkk W7PR32TRCA2 MC N11PGE11GBCFkk_3V3 2*2G/500_7.2K/BT/6L3.0/5R/bgn_FP_1.3C_MA_FR82
TM8572G-524G64Mnkk	EMEA	South Africa	LX.TW803.014	TM8572G-524G64Mnkk EM W7PR32EMTRZA2 MC XPP N11PGE11GBCFkk_3V3 2*2G/640/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572G-526G64Mn	WW	WW	S2.TW803.008	TM8572G-526G64Mn W7PR32TWW1 MC N11PGE11GBCFkk_3V3 2G+4G/640/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES62
TM8572G-528G64Mn	WW	GCTWN	S2.TW803.003	TM8572G-528G64Mn W7PR32TWW1 MC N11PGE11GBCFkk_3V3 2*4G/640/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572G-528G64Mn	WW	GCTWN	S2.TW803.007	TM8572G-528G64Mn W7PR32TWW1 MC N11PGE11GBCFkk_3V3 2*4G/640/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572G-528G64Mn	WW	WW	S2.TW803.004	TM8572G-528G64Mn W7PR32TWW1 MC N11PGE11GBCFkk_3V3 2*4G/640/6L3.0/5R/bgn_FP_1.3C_MA_ES62
TM8572G-528G64Mn	WW	WW	S2.TW803.011	TM8572G-528G64Mn W7PR32TWW1 MC N11PGE11GBCFkk_3V3 2*4G/640/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES62
TM8572G-5453G50Mnkk	EMEA	Albania/ Macedonia	LX.TW703.255	TM8572G-5453G50Mnkk W7PR32TSAL1 MC XPP N11MGE1512CFkk_3V3 2G+1G/500_7.2K/BT/9L3.0/5R/bgn_FP_1.3C_MA_A111
TM8572G-5453G50Mnkk	EMEA	Austria	LX.TW703.025	TM8572G-5453G50Mnkk W7PR32TRAT1 MC XPP N11MGE1512CFkk_3V3 2G+1G/500_7.2K/9L3.0/5R/bgn_FP_1.3C_MA_DE62

TM8572G-5453G50Mnkk	EMEA	Austria	LX.TW703.060	TM8572G-5453G50Mnkk W7PR32TRAT1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_DE62
TM8572G-5453G50Mnkk	EMEA	Austria	LX.TW703.212	TM8572G-5453G50Mnkk W7PR32TSAT1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_DE61
TM8572G-5453G50Mnkk	EMEA	Baltic	LX.TW703.018	TM8572G-5453G50Mnkk W7PR32TRBC3 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_SV21
TM8572G-5453G50Mnkk	EMEA	Baltic	LX.TW703.019	TM8572G-5453G50Mnkk W7PR32TRBC5 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_LT11
TM8572G-5453G50Mnkk	EMEA	Baltic	LX.TW703.040	TM8572G-5453G50Mnkk W7PR32TRBC4 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_LT11
TM8572G-5453G50Mnkk	EMEA	Baltic	LX.TW703.053	TM8572G-5453G50Mnkk W7PR32TRBC3 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_SV21
TM8572G-5453G50Mnkk	EMEA	Baltic	LX.TW703.054	TM8572G-5453G50Mnkk W7PR32TRBC5 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_LT11
TM8572G-5453G50Mnkk	EMEA	Baltic	LX.TW703.075	TM8572G-5453G50Mnkk W7PR32TRBC4 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_LT11
TM8572G-5453G50Mnkk	EMEA	Baltic	LX.TW703.214	TM8572G-5453G50Mnkk W7PR32TSBC4 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_LT11
TM8572G-5453G50Mnkk	EMEA	Baltic	LX.TW703.242	TM8572G-5453G50Mnkk W7PR32TSBC3 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_SV21
TM8572G-5453G50Mnkk	EMEA	Baltic	LX.TW703.258	TM8572G-5453G50Mnkk W7PR32TSBC5 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_LT11

TM8572G-5453G50Mnkk	EMEA	Belgium	LX.TW703.022	TM8572G-5453G50Mnkk W7PR32TRBE1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_NL12
TM8572G-5453G50Mnkk	EMEA	Belgium	LX.TW703.057	TM8572G-5453G50Mnkk W7PR32TRBE1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_NL12
TM8572G-5453G50Mnkk	EMEA	Belgium	LX.TW703.246	TM8572G-5453G50Mnkk W7PR32TSBE1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_NL11
TM8572G-5453G50Mnkk	EMEA	Cyprus	LX.TW703.035	TM8572G-5453G50Mnkk W7PR32TRCY1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_ES63
TM8572G-5453G50Mnkk	EMEA	Cyprus	LX.TW703.070	TM8572G-5453G50Mnkk W7PR32TRCY1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES63
TM8572G-5453G50Mnkk	EMEA	Cyprus	LX.TW703.249	TM8572G-5453G50Mnkk W7PR32TSCY1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES61
TM8572G-5453G50Mnkk	EMEA	Czech	LX.TW703.016	TM8572G-5453G50Mnkk W7PR32TRCZ2 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_SK12
TM8572G-5453G50Mnkk	EMEA	Czech	LX.TW703.051	TM8572G-5453G50Mnkk W7PR32TRCZ2 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_SK12
TM8572G-5453G50Mnkk	EMEA	Czech	LX.TW703.244	TM8572G-5453G50Mnkk W7PR32TSCZ2 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_SK11
TM8572G-5453G50Mnkk	EMEA	Denmark	LX.TW703.017	TM8572G-5453G50Mnkk W7PR32TRDK2 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_ENS2
TM8572G-5453G50Mnkk	EMEA	Denmark	LX.TW703.052	TM8572G-5453G50Mnkk W7PR32TRDK2 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ENS2

TM8572G-5453G50Mnkk	EMEA	Denmark	LX.TW703.247	TM8572G-5453G50Mnkk W7PR32TSDK2 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ENS1
TM8572G-5453G50Mnkk	EMEA	Finland	LX.TW703.024	TM8572G-5453G50Mnkk W7PR32TRFI2 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_FI12
TM8572G-5453G50Mnkk	EMEA	Finland	LX.TW703.059	TM8572G-5453G50Mnkk W7PR32TRFI2 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_FI12
TM8572G-5453G50Mnkk	EMEA	Finland	LX.TW703.248	TM8572G-5453G50Mnkk W7PR32TSFI2 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_FI11
TM8572G-5453G50Mnkk	EMEA	France	LX.TW703.029	TM8572G-5453G50Mnkk W7PR32TRFR1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_ES82
TM8572G-5453G50Mnkk	EMEA	France	LX.TW703.064	TM8572G-5453G50Mnkk W7PR32TRFR1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES82
TM8572G-5453G50Mnkk	EMEA	France	LX.TW703.251	TM8572G-5453G50Mnkk W7PR32TSFR1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES81
TM8572G-5453G50Mnkk	EMEA	Germany	LX.TW703.042	TM8572G-5453G50Mnkk W7PR32TRDE1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_DE62
TM8572G-5453G50Mnkk	EMEA	Germany	LX.TW703.077	TM8572G-5453G50Mnkk W7PR32TRDE1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_DE62
TM8572G-5453G50Mnkk	EMEA	Germany	LX.TW703.252	TM8572G-5453G50Mnkk W7PR32TSDE1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_DE61
TM8572G-5453G50Mnkk	EMEA	Greece	LX.TW703.030	TM8572G-5453G50Mnkk W7PR32TRGR1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_EL32

TM8572G-5453G50Mnkk	EMEA	Greece	LX.TW703.065	TM8572G-5453G50Mnkk W7PR32TRGR1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_EL32
TM8572G-5453G50Mnkk	EMEA	Greece	LX.TW703.257	TM8572G-5453G50Mnkk W7PR32TSGR1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_EL31
TM8572G-5453G50Mnkk	EMEA	Holland	LX.TW703.044	TM8572G-5453G50Mnkk W7PR32TRNL1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_NL12
TM8572G-5453G50Mnkk	EMEA	Holland	LX.TW703.079	TM8572G-5453G50Mnkk W7PR32TRNL1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_NL12
TM8572G-5453G50Mnkk	EMEA	Holland	LX.TW703.215	TM8572G-5453G50Mnkk W7PR32TSNL1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_NL11
TM8572G-5453G50Mnkk	EMEA	Hungary	LX.TW703.031	TM8572G-5453G50Mnkk W7PR32TRHU1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_HU12
TM8572G-5453G50Mnkk	EMEA	Hungary	LX.TW703.066	TM8572G-5453G50Mnkk W7PR32TRHU1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_HU12
TM8572G-5453G50Mnkk	EMEA	Hungary	LX.TW703.253	TM8572G-5453G50Mnkk W7PR32TSHU1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_HU11
TM8572G-5453G50Mnkk	EMEA	Israel	LX.TW703.039	TM8572G-5453G50Mnkk W7PR32TRIL1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_HE53
TM8572G-5453G50Mnkk	EMEA	Israel	LX.TW703.041	TM8572G-5453G50Mnkk W7PR32TRIL1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_HE32
TM8572G-5453G50Mnkk	EMEA	Israel	LX.TW703.074	TM8572G-5453G50Mnkk W7PR32TRIL1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_HE53

TM8572G-5453G50Mnkk	EMEA	Israel	LX.TW703.076	TM8572G-5453G50Mnkk W7PR32TRIL1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_HE32
TM8572G-5453G50Mnkk	EMEA	Israel	LX.TW703.259	TM8572G-5453G50Mnkk W7PR32TSIL1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_HE61
TM8572G-5453G50Mnkk	EMEA	Italy	LX.TW703.028	TM8572G-5453G50Mnkk W7PR32TRIT1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_IT11
TM8572G-5453G50Mnkk	EMEA	Italy	LX.TW703.063	TM8572G-5453G50Mnkk W7PR32TRIT1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_IT11
TM8572G-5453G50Mnkk	EMEA	Italy	LX.TW703.243	TM8572G-5453G50Mnkk W7PR32TSIT1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_IT11
TM8572G-5453G50Mnkk	EMEA	Latvia	LX.TW703.026	TM8572G-5453G50Mnkk W7PR32TRLV1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_RU22
TM8572G-5453G50Mnkk	EMEA	Latvia	LX.TW703.049	TM8572G-5453G50Mnkk W7PR32TRLV1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_LT11
TM8572G-5453G50Mnkk	EMEA	Latvia	LX.TW703.061	TM8572G-5453G50Mnkk W7PR32TRLV1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_RU22
TM8572G-5453G50Mnkk	EMEA	Latvia	LX.TW703.084	TM8572G-5453G50Mnkk W7PR32TRLV1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_LT11
TM8572G-5453G50Mnkk	EMEA	Luxembou rg	LX.TW703.047	TM8572G-5453G50Mnkk W7PR32TRLU3 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_IT42
TM8572G-5453G50Mnkk	EMEA	Luxembou rg	LX.TW703.082	TM8572G-5453G50Mnkk W7PR32TRLU3 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_IT42

TM8572G-5453G50Mnkk	EMEA	Luxembourg	LX.TW703.254	TM8572G-5453G50Mnkk W7PR32TSLU3 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_IT41
TM8572G-5453G50Mnkk	EMEA	Norway	LX.TW703.023	TM8572G-5453G50Mnkk W7PR32TRNO1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_NO12
TM8572G-5453G50Mnkk	EMEA	Norway	LX.TW703.048	TM8572G-5453G50Mnkk W7PR32TRNO3 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_ENS2
TM8572G-5453G50Mnkk	EMEA	Norway	LX.TW703.058	TM8572G-5453G50Mnkk W7PR32TRNO1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_NO12
TM8572G-5453G50Mnkk	EMEA	Norway	LX.TW703.083	TM8572G-5453G50Mnkk W7PR32TRNO3 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ENS2
TM8572G-5453G50Mnkk	EMEA	Norway	LX.TW703.239	TM8572G-5453G50Mnkk W7PR32TSNO1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_NO11
TM8572G-5453G50Mnkk	EMEA	Norway	LX.TW703.245	TM8572G-5453G50Mnkk W7PR32TSNO3 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ENS1
TM8572G-5453G50Mnkk	EMEA	Poland	LX.TW703.046	TM8572G-5453G50Mnkk W7PR32TRPL1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_PL72
TM8572G-5453G50Mnkk	EMEA	Poland	LX.TW703.081	TM8572G-5453G50Mnkk W7PR32TRPL1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_PL72
TM8572G-5453G50Mnkk	EMEA	Poland	LX.TW703.240	TM8572G-5453G50Mnkk W7PR32TSPL1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_PL71
TM8572G-5453G50Mnkk	EMEA	Portugal	LX.TW703.015	TM8572G-5453G50Mnkk W7PR32TRPT1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_PT12

TM8572G-5453G50Mnkk	EMEA	Portugal	LX.TW703.050	TM8572G-5453G50Mnkk W7PR32TRPT1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_PT12
TM8572G-5453G50Mnkk	EMEA	Portugal	LX.TW703.213	TM8572G-5453G50Mnkk W7PR32TSPT1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_PT11
TM8572G-5453G50Mnkk	EMEA	Spain	LX.TW703.027	TM8572G-5453G50Mnkk W7PR32TRES1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_ES52
TM8572G-5453G50Mnkk	EMEA	Spain	LX.TW703.062	TM8572G-5453G50Mnkk W7PR32TRES1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES52
TM8572G-5453G50Mnkk	EMEA	Spain	LX.TW703.241	TM8572G-5453G50Mnkk W7PR32TSES1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES51
TM8572G-5453G50Mnkk	EMEA	Sweden	LX.TW703.043	TM8572G-5453G50Mnkk W7PR32TRSE1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_FI12
TM8572G-5453G50Mnkk	EMEA	Sweden	LX.TW703.078	TM8572G-5453G50Mnkk W7PR32TRSE1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_FI12
TM8572G-5453G50Mnkk	EMEA	Sweden	LX.TW703.260	TM8572G-5453G50Mnkk W7PR32TSSE1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_FI11
TM8572G-5453G50Mnkk	EMEA	Switzerland	LX.TW703.045	TM8572G-5453G50Mnkk W7PR32TRCH1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_IT42
TM8572G-5453G50Mnkk	EMEA	Switzerland	LX.TW703.080	TM8572G-5453G50Mnkk W7PR32TRCH1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_IT42
TM8572G-5453G50Mnkk	EMEA	Switzerland	LX.TW703.261	TM8572G-5453G50Mnkk W7PR32TSCH1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_IT41

TM8572G-5453G50Mnkk	EMEA	UK	LX.TW703.034	TM8572G-5453G50Mnkk W7PR32TRGB1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/9L3.0/5R/ bgn_FP_1.3C_MA_ES62
TM8572G-5453G50Mnkk	EMEA	UK	LX.TW703.069	TM8572G-5453G50Mnkk W7PR32TRGB1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES62
TM8572G-5453G50Mnkk	EMEA	UK	LX.TW703.256	TM8572G-5453G50Mnkk W7PR32TSGB1 MC XPP N11MGE1512CFkk_3V3 2G+1G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES61
TM8572G-5454G16Mnkk	EMEA	Albania/ Macedonia	LX.TW703.307	TM8572G-5454G16Mnkk W7PR32TSAL1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_A111
TM8572G-5454G16Mnkk	EMEA	Algeria	LX.TW703.169	TM8572G-5454G16Mnkk EM W7PR32EMTRDZ1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES81
TM8572G-5454G16Mnkk	EMEA	Austria	LX.TW703.131	TM8572G-5454G16Mnkk W7PR32TRAT1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_DE62
TM8572G-5454G16Mnkk	EMEA	Austria	LX.TW703.289	TM8572G-5454G16Mnkk W7PR32TSAT1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_DE61
TM8572G-5454G16Mnkk	EMEA	Baltic	LX.TW703.124	TM8572G-5454G16Mnkk W7PR32TRBC3 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_SV21
TM8572G-5454G16Mnkk	EMEA	Baltic	LX.TW703.125	TM8572G-5454G16Mnkk W7PR32TRBC5 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_LT11
TM8572G-5454G16Mnkk	EMEA	Baltic	LX.TW703.146	TM8572G-5454G16Mnkk W7PR32TRBC4 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_LT11
TM8572G-5454G16Mnkk	EMEA	Baltic	LX.TW703.291	TM8572G-5454G16Mnkk W7PR32TSBC4 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_LT11

TM8572G-5454G16Mnkk	EMEA	Baltic	LX.TW703.296	TM8572G-5454G16Mnkk W7PR32TSBC3 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_SV21
TM8572G-5454G16Mnkk	EMEA	Baltic	LX.TW703.310	TM8572G-5454G16Mnkk W7PR32TSBC5 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_LT11
TM8572G-5454G16Mnkk	EMEA	Belgium	LX.TW703.128	TM8572G-5454G16Mnkk W7PR32TRBE1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_NL12
TM8572G-5454G16Mnkk	EMEA	Belgium	LX.TW703.301	TM8572G-5454G16Mnkk W7PR32TSBE1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_NL11
TM8572G-5454G16Mnkk	EMEA	Cyprus	LX.TW703.141	TM8572G-5454G16Mnkk W7PR32TRCY1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES63
TM8572G-5454G16Mnkk	EMEA	Cyprus	LX.TW703.314	TM8572G-5454G16Mnkk W7PR32TSCY1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES61
TM8572G-5454G16Mnkk	EMEA	Czech	LX.TW703.122	TM8572G-5454G16Mnkk W7PR32TRCZ2 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_SK12
TM8572G-5454G16Mnkk	EMEA	Czech	LX.TW703.298	TM8572G-5454G16Mnkk W7PR32TSCZ2 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_SK11
TM8572G-5454G16Mnkk	EMEA	Denmark	LX.TW703.123	TM8572G-5454G16Mnkk W7PR32TRDK2 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ENS2
TM8572G-5454G16Mnkk	EMEA	Denmark	LX.TW703.302	TM8572G-5454G16Mnkk W7PR32TSDK2 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ENS1
TM8572G-5454G16Mnkk	EMEA	Finland	LX.TW703.130	TM8572G-5454G16Mnkk W7PR32TRFI2 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_FI12

TM8572G-5454G16Mnkk	EMEA	Finland	LX.TW703.303	TM8572G-5454G16Mnkk W7PR32TSFI2 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_FI11
TM8572G-5454G16Mnkk	EMEA	France	LX.TW703.135	TM8572G-5454G16Mnkk W7PR32TRFR1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES82
TM8572G-5454G16Mnkk	EMEA	France	LX.TW703.316	TM8572G-5454G16Mnkk W7PR32TSFR1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES81
TM8572G-5454G16Mnkk	EMEA	Germany	LX.TW703.148	TM8572G-5454G16Mnkk W7PR32TRDE1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_DE62
TM8572G-5454G16Mnkk	EMEA	Germany	LX.TW703.304	TM8572G-5454G16Mnkk W7PR32TSDE1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_DE61
TM8572G-5454G16Mnkk	EMEA	Greece	LX.TW703.136	TM8572G-5454G16Mnkk W7PR32TRGR1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_EL32
TM8572G-5454G16Mnkk	EMEA	Greece	LX.TW703.309	TM8572G-5454G16Mnkk W7PR32TSGR1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_EL31
TM8572G-5454G16Mnkk	EMEA	Holland	LX.TW703.150	TM8572G-5454G16Mnkk W7PR32TRNL1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_NL12
TM8572G-5454G16Mnkk	EMEA	Holland	LX.TW703.292	TM8572G-5454G16Mnkk W7PR32TSNL1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_NL11
TM8572G-5454G16Mnkk	EMEA	Hungary	LX.TW703.137	TM8572G-5454G16Mnkk W7PR32TRHU1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_HU12
TM8572G-5454G16Mnkk	EMEA	Hungary	LX.TW703.305	TM8572G-5454G16Mnkk W7PR32TSHU1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_HU11

TM8572G-5454G16Mnkk	EMEA	Israel	LX.TW703.145	TM8572G-5454G16Mnkk W7PR32TRIL1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_HE53
TM8572G-5454G16Mnkk	EMEA	Israel	LX.TW703.147	TM8572G-5454G16Mnkk W7PR32TRIL1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_HE32
TM8572G-5454G16Mnkk	EMEA	Israel	LX.TW703.311	TM8572G-5454G16Mnkk W7PR32TSIL1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_HE61
TM8572G-5454G16Mnkk	EMEA	Italy	LX.TW703.134	TM8572G-5454G16Mnkk W7PR32TRIT1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_IT11
TM8572G-5454G16Mnkk	EMEA	Italy	LX.TW703.297	TM8572G-5454G16Mnkk W7PR32TSIT1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_IT11
TM8572G-5454G16Mnkk	EMEA	Latvia	LX.TW703.132	TM8572G-5454G16Mnkk W7PR32TRLV1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_RU22
TM8572G-5454G16Mnkk	EMEA	Latvia	LX.TW703.155	TM8572G-5454G16Mnkk W7PR32TRLV1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_LT11
TM8572G-5454G16Mnkk	EMEA	Luxembou rg	LX.TW703.153	TM8572G-5454G16Mnkk W7PR32TRLU3 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_IT42
TM8572G-5454G16Mnkk	EMEA	Luxembou rg	LX.TW703.306	TM8572G-5454G16Mnkk W7PR32TSLU3 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_IT41
TM8572G-5454G16Mnkk	EMEA	Middle East	LX.TW703.156	TM8572G-5454G16Mnkk EM W7PR32EMTRME6 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES61
TM8572G-5454G16Mnkk	EMEA	Middle East	LX.TW703.157	TM8572G-5454G16Mnkk EM W7PR32EMTRME9 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES81

TM8572G-5454G16Mnkk	EMEA	Middle East	LX.TW703.159	TM8572G-5454G16Mnkk EM W7PR32EMTRME4 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_RU62
TM8572G-5454G16Mnkk	EMEA	Middle East	LX.TW703.161	TM8572G-5454G16Mnkk EM W7PR32EMTRME2 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_AR21
TM8572G-5454G16Mnkk	EMEA	Middle East	LX.TW703.166	TM8572G-5454G16Mnkk EM W7PR32EMTRMEB MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES61
TM8572G-5454G16Mnkk	EMEA	Middle East	LX.TW703.167	TM8572G-5454G16Mnkk EM W7PR32EMTRME3 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES81
TM8572G-5454G16Mnkk	EMEA	Middle East	LX.TW703.168	TM8572G-5454G16Mnkk EM W7PR32EMTRMEB MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ARA1
TM8572G-5454G16Mnkk	EMEA	Middle East	LX.TW703.170	TM8572G-5454G16Mnkk EM W7PR32EMTRME2 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_AR11
TM8572G-5454G16Mnkk	EMEA	Middle East	LX.TW703.171	TM8572G-5454G16Mnkk EM W7PR32EMTRME9 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_AR52
TM8572G-5454G16Mnkk	EMEA	Norway	LX.TW703.129	TM8572G-5454G16Mnkk W7PR32TRNO1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_NO12
TM8572G-5454G16Mnkk	EMEA	Norway	LX.TW703.154	TM8572G-5454G16Mnkk W7PR32TRNO3 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ENS2
TM8572G-5454G16Mnkk	EMEA	Norway	LX.TW703.293	TM8572G-5454G16Mnkk W7PR32TSNO1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_NO11
TM8572G-5454G16Mnkk	EMEA	Norway	LX.TW703.299	TM8572G-5454G16Mnkk W7PR32TSNO3 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ENS1

TM8572G-5454G16Mnkk	EMEA	Poland	LX.TW703.152	TM8572G-5454G16Mnkk W7PR32TRPL1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_PL72
TM8572G-5454G16Mnkk	EMEA	Poland	LX.TW703.294	TM8572G-5454G16Mnkk W7PR32TSPL1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_PL71
TM8572G-5454G16Mnkk	EMEA	Portugal	LX.TW703.121	TM8572G-5454G16Mnkk W7PR32TRPT1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_PT12
TM8572G-5454G16Mnkk	EMEA	Portugal	LX.TW703.290	TM8572G-5454G16Mnkk W7PR32TSPT1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_PT11
TM8572G-5454G16Mnkk	EMEA	South Africa	LX.TW703.158	TM8572G-5454G16Mnkk EM W7PR32EMTRZA4 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ENA1
TM8572G-5454G16Mnkk	EMEA	South Africa	LX.TW703.160	TM8572G-5454G16Mnkk EM W7PR32EMTRZA5 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES61
TM8572G-5454G16Mnkk	EMEA	South Africa	LX.TW703.162	TM8572G-5454G16Mnkk EM W7PR32EMTRZA2 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES61
TM8572G-5454G16Mnkk	EMEA	South Africa	LX.TW703.163	TM8572G-5454G16Mnkk EM W7PR32EMTRZA1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES81
TM8572G-5454G16Mnkk	EMEA	South Africa	LX.TW703.165	TM8572G-5454G16Mnkk EM W7PR32EMTRZA6 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_PT11
TM8572G-5454G16Mnkk	EMEA	Spain	LX.TW703.133	TM8572G-5454G16Mnkk W7PR32TRES1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES52
TM8572G-5454G16Mnkk	EMEA	Spain	LX.TW703.295	TM8572G-5454G16Mnkk W7PR32TSES1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES51

TM8572G-5454G16Mnkk	EMEA	Sweden	LX.TW703.149	TM8572G-5454G16Mnkk W7PR32TRSE1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_FI12
TM8572G-5454G16Mnkk	EMEA	Sweden	LX.TW703.312	TM8572G-5454G16Mnkk W7PR32TSSE1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_FI11
TM8572G-5454G16Mnkk	EMEA	Switzerland	LX.TW703.151	TM8572G-5454G16Mnkk W7PR32TRCH1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_IT42
TM8572G-5454G16Mnkk	EMEA	Switzerland	LX.TW703.313	TM8572G-5454G16Mnkk W7PR32TSCH1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_IT41
TM8572G-5454G16Mnkk	EMEA	Turkey	LX.TW703.164	TM8572G-5454G16Mnkk EM W7PR32EMTRTR1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_TR41
TM8572G-5454G16Mnkk	EMEA	UK	LX.TW703.140	TM8572G-5454G16Mnkk W7PR32TRGB1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES62
TM8572G-5454G16Mnkk	EMEA	UK	LX.TW703.308	TM8572G-5454G16Mnkk W7PR32TSGB1 MC XPP N11MGE1512CFkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES61
TM8572G-5454G32Mnkk	EMEA	South Africa	LX.TWH03.002	TM8572G-5454G32Mnkk EM W7PR32EMTRZA2 MC XPP N11PGE11GBCKk_3V3 2*2G/320_7.2K/ BT/6L3.0/5R/bgn_1.3C_MA_ES61
TM8572G-5454G50Mnk	EMEA	Germany	LX.TW802.001	TM8572G-5454G50Mnk W7HP64TRDE1 MC N11PGE11GBCFkk_3V3 2*2G/500_L/ BT/6L3.0/5R/bgn_FP_1.3C_MA_DE61
TM8572G-5454G50Mnkk	EMEA	South Africa	LX.TW703.013	TM8572G-5454G50Mnkk EM W7PR32EMTRZA2 MC XPP N11MGE1512CFkk_3V3 2*2G/ 500_7.2K/BT/6L3.0/5R/ bgn_FP_1.3C_MA_ES61
TM8572G-5454G50Mnkk	EMEA	UK	LX.TW703.317	TM8572G-5454G50Mnkk W7PR32TRGB1 MC XPP N11MGE1512CFkk_3V3 2*2G/ 500_7.2K/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES62

TM8572G-5454G64Mnkk	EMEA	Albania/ Macedonia	LX.TW703.282	TM8572G-5454G64Mnkk W7PR32TSAL1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_A111
TM8572G-5454G64Mnkk	EMEA	Austria	LX.TW703.095	TM8572G-5454G64Mnkk W7PR32TRAT1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_DE62
TM8572G-5454G64Mnkk	EMEA	Austria	LX.TW703.262	TM8572G-5454G64Mnkk W7PR32TSAT1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_DE61
TM8572G-5454G64Mnkk	EMEA	Baltic	LX.TW703.088	TM8572G-5454G64Mnkk W7PR32TRBC3 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_SV21
TM8572G-5454G64Mnkk	EMEA	Baltic	LX.TW703.089	TM8572G-5454G64Mnkk W7PR32TRBC5 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_LT11
TM8572G-5454G64Mnkk	EMEA	Baltic	LX.TW703.111	TM8572G-5454G64Mnkk W7PR32TRBC4 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_LT11
TM8572G-5454G64Mnkk	EMEA	Baltic	LX.TW703.264	TM8572G-5454G64Mnkk W7PR32TSBC4 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_LT11
TM8572G-5454G64Mnkk	EMEA	Baltic	LX.TW703.269	TM8572G-5454G64Mnkk W7PR32TSBC3 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_SV21
TM8572G-5454G64Mnkk	EMEA	Baltic	LX.TW703.285	TM8572G-5454G64Mnkk W7PR32TSBC5 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_LT11
TM8572G-5454G64Mnkk	EMEA	Belgium	LX.TW703.092	TM8572G-5454G64Mnkk W7PR32TRBE1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_NL12
TM8572G-5454G64Mnkk	EMEA	Belgium	LX.TW703.273	TM8572G-5454G64Mnkk W7PR32TSBE1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_NL11
TM8572G-5454G64Mnkk	EMEA	Cyprus	LX.TW703.106	TM8572G-5454G64Mnkk W7PR32TRCY1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_ES63
TM8572G-5454G64Mnkk	EMEA	Cyprus	LX.TW703.276	TM8572G-5454G64Mnkk W7PR32TSCY1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_ES61

TM8572G-5454G64Mnkk	EMEA	Czech	LX.TW703.086	TM8572G-5454G64Mnkk W7PR32TRCZ2 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_SK12
TM8572G-5454G64Mnkk	EMEA	Czech	LX.TW703.271	TM8572G-5454G64Mnkk W7PR32TSCZ2 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_SK11
TM8572G-5454G64Mnkk	EMEA	Denmark	LX.TW703.087	TM8572G-5454G64Mnkk W7PR32TRDK2 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_ENS2
TM8572G-5454G64Mnkk	EMEA	Denmark	LX.TW703.274	TM8572G-5454G64Mnkk W7PR32TSDK2 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_ENS1
TM8572G-5454G64Mnkk	EMEA	Finland	LX.TW703.094	TM8572G-5454G64Mnkk W7PR32TRFI2 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_FI12
TM8572G-5454G64Mnkk	EMEA	Finland	LX.TW703.275	TM8572G-5454G64Mnkk W7PR32TSFI2 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_FI11
TM8572G-5454G64Mnkk	EMEA	France	LX.TW703.099	TM8572G-5454G64Mnkk W7PR32TRFR1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_ES82
TM8572G-5454G64Mnkk	EMEA	France	LX.TW703.278	TM8572G-5454G64Mnkk W7PR32TSFR1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_ES81
TM8572G-5454G64Mnkk	EMEA	Germany	LX.TW703.113	TM8572G-5454G64Mnkk W7PR32TRDE1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_DE62
TM8572G-5454G64Mnkk	EMEA	Germany	LX.TW703.279	TM8572G-5454G64Mnkk W7PR32TSDE1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_DE61
TM8572G-5454G64Mnkk	EMEA	Greece	LX.TW703.101	TM8572G-5454G64Mnkk W7PR32TRGR1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_EL32
TM8572G-5454G64Mnkk	EMEA	Greece	LX.TW703.284	TM8572G-5454G64Mnkk W7PR32TSGR1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_EL31
TM8572G-5454G64Mnkk	EMEA	Holland	LX.TW703.115	TM8572G-5454G64Mnkk W7PR32TRNL1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_NL12

TM8572G-5454G64Mnkk	EMEA	Holland	LX.TW703.265	TM8572G-5454G64Mnkk W7PR32TSNL1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_NL11
TM8572G-5454G64Mnkk	EMEA	Hungary	LX.TW703.102	TM8572G-5454G64Mnkk W7PR32TRHU1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_HU12
TM8572G-5454G64Mnkk	EMEA	Hungary	LX.TW703.280	TM8572G-5454G64Mnkk W7PR32TSHU1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_HU11
TM8572G-5454G64Mnkk	EMEA	Israel	LX.TW703.110	TM8572G-5454G64Mnkk W7PR32TRIL1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_HE53
TM8572G-5454G64Mnkk	EMEA	Israel	LX.TW703.112	TM8572G-5454G64Mnkk W7PR32TRIL1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_HE32
TM8572G-5454G64Mnkk	EMEA	Israel	LX.TW703.286	TM8572G-5454G64Mnkk W7PR32TSIL1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_HE61
TM8572G-5454G64Mnkk	EMEA	Italy	LX.TW703.098	TM8572G-5454G64Mnkk W7PR32TRIT1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_IT11
TM8572G-5454G64Mnkk	EMEA	Italy	LX.TW703.270	TM8572G-5454G64Mnkk W7PR32TSIT1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_IT11
TM8572G-5454G64Mnkk	EMEA	Latvia	LX.TW703.096	TM8572G-5454G64Mnkk W7PR32TRLV1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_RU22
TM8572G-5454G64Mnkk	EMEA	Latvia	LX.TW703.120	TM8572G-5454G64Mnkk W7PR32TRLV1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_LT11
TM8572G-5454G64Mnkk	EMEA	Luxembou rg	LX.TW703.118	TM8572G-5454G64Mnkk W7PR32TRLU3 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_IT42
TM8572G-5454G64Mnkk	EMEA	Luxembou rg	LX.TW703.281	TM8572G-5454G64Mnkk W7PR32TSLU3 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_IT41
TM8572G-5454G64Mnkk	EMEA	Norway	LX.TW703.093	TM8572G-5454G64Mnkk W7PR32TRNO1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_NO12

TM8572G-5454G64Mnkk	EMEA	Norway	LX.TW703.119	TM8572G-5454G64Mnkk W7PR32TRNO3 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_ENS2
TM8572G-5454G64Mnkk	EMEA	Norway	LX.TW703.266	TM8572G-5454G64Mnkk W7PR32TSNO1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_NO11
TM8572G-5454G64Mnkk	EMEA	Norway	LX.TW703.272	TM8572G-5454G64Mnkk W7PR32TSNO3 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_ENS1
TM8572G-5454G64Mnkk	EMEA	Poland	LX.TW703.117	TM8572G-5454G64Mnkk W7PR32TRPL1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_PL72
TM8572G-5454G64Mnkk	EMEA	Poland	LX.TW703.267	TM8572G-5454G64Mnkk W7PR32TSPL1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_PL71
TM8572G-5454G64Mnkk	EMEA	Portugal	LX.TW703.085	TM8572G-5454G64Mnkk W7PR32TRPT1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_PT12
TM8572G-5454G64Mnkk	EMEA	Portugal	LX.TW703.263	TM8572G-5454G64Mnkk W7PR32TSPT1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_PT11
TM8572G-5454G64Mnkk	EMEA	Spain	LX.TW703.097	TM8572G-5454G64Mnkk W7PR32TRES1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_ES52
TM8572G-5454G64Mnkk	EMEA	Spain	LX.TW703.268	TM8572G-5454G64Mnkk W7PR32TSES1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_ES51
TM8572G-5454G64Mnkk	EMEA	Sweden	LX.TW703.114	TM8572G-5454G64Mnkk W7PR32TRSE1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_FI12
TM8572G-5454G64Mnkk	EMEA	Sweden	LX.TW703.287	TM8572G-5454G64Mnkk W7PR32TSSE1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_FI11
TM8572G-5454G64Mnkk	EMEA	Switzerlan d	LX.TW703.116	TM8572G-5454G64Mnkk W7PR32TRCH1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_IT42
TM8572G-5454G64Mnkk	EMEA	Switzerlan d	LX.TW703.288	TM8572G-5454G64Mnkk W7PR32TSCH1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_IT41

TM8572G-5454G64Mnkk	EMEA	UK	LX.TW703.105	TM8572G-5454G64Mnkk W7PR32TRGB1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_ES62
TM8572G-5454G64Mnkk	EMEA	UK	LX.TW703.283	TM8572G-5454G64Mnkk W7PR32TSGB1 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 9L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572G-624G16Mnkk	EMEA	Switzerland	LX.TXP03.003	TM8572G-624G16Mnkk W7PR32TRCH1 MC XPP N11MGE1512GCkk_3V3 2*2G/ S160G_2.5/BT/9L3.0/5R/ bgn_1.3C_F33-900_MA_IT42
TM8572G-624G50Mn	WW	GCTWN	S2.TW803.012	TM8572G-624G50Mn W7PR32TWW1 MC N11PGE11GBCFkk_3V3 2*2G/ 500_L/BT/6L3.0/5R/ bgn_FP_1.3C_MA_ES61
TM8572G-624G50Mn	WW	WW	S2.TW803.013	TM8572G-624G50Mn W7PR32TWW1 MC N11PGE11GBCFkk_3V3 2*2G/ 500_L/BT/6L3.0/5R/ bgn_FP_1.3C_MA_ES62
TM8572G-624G50Mnkk	AAP	Australia/ New Zealand	LX.TW803.016	TM8572G-624G50Mnkk W7PR32TRAU1 MC XPP N11PGE11GBCFkk_3V3 2*2G/500_L/ 6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572G-624G64Mn	EMEA	Germany	LX.TW803.011	TM8572G-624G64Mn W7PR32TRDE1 MC XPP N11PGE11GBCFkk_3V3 1*4G/ 640/BT/6L3.0/5R/ bgn_FP_1.3C_MA_DE62
TM8572G-624G64Mnk	EMEA	Germany	LX.TW802.002	TM8572G-624G64Mnk W7HP64TRDE1 MC N11PGE11GBCFkk_3V3 1*4G/640/ BT/6L3.0/5R/bgn_FP_1.3C_MA_DE61
TM8572G-628G16Mn	WW	GCTWN	S2.TW803.014	TM8572G-628G16Mn W7PR32TWW1 MC N11PGE11GBCFkk_3V3 2*4G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES61
TM8572G-628G16Mn	WW	WW	S2.TW803.015	TM8572G-628G16Mn W7PR32TWW1 MC N11PGE11GBCFkk_3V3 2*4G/ S160G_2.5/BT/9L3.0/5R/ bgn_FP_1.3C_MA_ES62

Model	Country	Acer Part No	BOM Name	CPU	VGA Chip
TM8572G-332G16Mn	GCTWN	S2.TW703.001	TM8572G_N11MGE1512CFkk_3V3	Ci3330M	N11MGE1
TM8572G-332G16Mn	GCTWN	S2.TW803.001	TM8572G_N11PGE11GBCFkk_3V3	Ci3330M	N11PGE1
TM8572G-332G16Mn	GCTWN	S2.TWH03.001	TM8572G_N11PGE11GBCKk_3V3	Ci3330M	N11PGE1
TM8572G-332G16Mn	GCTWN	S2.TXP02.001	TM8572G_N11MGE1512GCkk_3V3	Ci3330M	N11MGE1

TM8572G-332G16Mn	WW	S2.TW703.002	TM8572TG_N11 MGE1512CFkk_3V3	Ci3330M	N11MGE1
TM8572G-332G16Mn	WW	S2.TW803.002	TM8572G_N11P GE11GBCFkk_3V3	Ci3330M	N11PGE1
TM8572G-332G16Mn	WW	S2.TWH03.002	TM8572G_N11P GE11GBCkk_3V3	Ci3330M	N11PGE1
TM8572G-332G16Mn	WW	S2.TXP02.002	TM8572G_N11M GE1512GCKk_3V3	Ci3330M	N11MGE1
TM8572G-332G50Mnkk	GCTWN	LX.TW803.002	TM8572G_N11P GE11GBCFkk_3V3	Ci3330M	N11PGE1
TM8572G-334G32Mn	South Africa	LX.TW803.003	TM8572G_N11P GE11GBCFkk_3V3	Ci3330M	N11PGE1
TM8572G-334G50Mn	South Africa	LX.TW803.004	TM8572G_N11P GE11GBCFkk_3V3	Ci3330M	N11PGE1
TM8572G-334G64Mn	South Africa	LX.TW803.005	TM8572G_N11P GE11GBCFkk_3V3	Ci3330M	N11PGE1
TM8572G-353G32Mnkk	Albania/ Macedonia	LX.TW703.232	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Austria	LX.TW703.182	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Austria	LX.TW703.208	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Baltic	LX.TW703.175	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Baltic	LX.TW703.176	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Baltic	LX.TW703.197	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Baltic	LX.TW703.210	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Baltic	LX.TW703.219	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Baltic	LX.TW703.235	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Belgium	LX.TW703.179	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1

TM8572G-353G32Mnkk	Belgium	LX.TW703.223	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Cyprus	LX.TW703.192	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Cyprus	LX.TW703.226	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Czech	LX.TW703.173	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Czech	LX.TW703.221	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Denmark	LX.TW703.174	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Denmark	LX.TW703.224	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Finland	LX.TW703.181	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Finland	LX.TW703.225	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	France	LX.TW703.186	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	France	LX.TW703.228	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Germany	LX.TW703.203	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Germany	LX.TW703.229	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Greece	LX.TW703.187	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Greece	LX.TW703.234	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Holland	LX.TW703.205	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Holland	LX.TW703.211	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Hungary	LX.TW703.188	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1

TM8572G-353G32Mnkk	Hungary	LX.TW703.230	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Israel	LX.TW703.196	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Israel	LX.TW703.202	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Israel	LX.TW703.236	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Italy	LX.TW703.185	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Italy	LX.TW703.220	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Latvia	LX.TW703.183	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Latvia	LX.TW703.201	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Luxembou rg	LX.TW703.198	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Luxembou rg	LX.TW703.231	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Norway	LX.TW703.180	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Norway	LX.TW703.199	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Norway	LX.TW703.216	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Norway	LX.TW703.222	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Poland	LX.TW703.207	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Poland	LX.TW703.217	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Portugal	LX.TW703.172	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Portugal	LX.TW703.209	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1

TM8572G-353G32Mnkk	Spain	LX.TW703.184	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Spain	LX.TW703.218	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Sweden	LX.TW703.204	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Sweden	LX.TW703.237	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Switzerland	LX.TW703.206	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	Switzerland	LX.TW703.238	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	UK	LX.TW703.191	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-353G32Mnkk	UK	LX.TW703.233	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572G-354G32Mn	Spain	LX.TW803.010	TM8572G_N11P GE11GBCFkk_3V3	Ci3350M	N11PGE1
TM8572G-354G50Mnkk	Switzerland	LX.TXP03.002	TM8572G_N11M GE1512GCKk_3V3	Ci3350M	N11MGE1
TM8572G-432G50Mnkk	GCTWN	LX.TW803.001	TM8572G_N11P GE11GBCFkk_3V3	Ci5430M	N11PGE1
TM8572G-434G25Mn	GCTWN	S2.TW703.003	TM8572TG_N11 MGE1512CFkk_3V3	Ci5430M	N11MGE1
TM8572G-434G25Mn	GCTWN	S2.TW703.005	TM8572TG_N11 MGE1512CFkk_3V3	Ci5430M	N11MGE1
TM8572G-434G25Mn	South Africa	LX.TW803.009	TM8572G_N11P GE11GBCFkk_3V3	Ci5430M	N11PGE1
TM8572G-434G25Mn	WW	S2.TW703.004	TM8572TG_N11 MGE1512CFkk_3V3	Ci5430M	N11MGE1
TM8572G-434G25Mn	WW	S2.TW703.006	TM8572TG_N11 MGE1512CFkk_3V3	Ci5430M	N11MGE1
TM8572G-434G32Mn	South Africa	LX.TW803.008	TM8572G_N11P GE11GBCFkk_3V3	Ci5430M	N11PGE1
TM8572G-434G32Mn	South Africa	LX.TWH03.001	TM8572G_N11P GE11GBCKk_3V3	Ci5430M	N11PGE1

TM8572G-434G50Mn	South Africa	LX.TW803.007	TM8572G_N11P GE11GBCFkk_3 V3	Ci5430M	N11PGE1
TM8572G-434G50Mnkk	Germany	LX.TW802.003	TM8572G_N11P GE11GBCFkk_3 V3	Ci5430M	N11PGE1
TM8572G-434G64Mn	South Africa	LX.TW803.006	TM8572G_N11P GE11GBCFkk_3 V3	Ci5430M	N11PGE1
TM8572G-434G64Mnkk	Germany	LX.TW802.004	TM8572G_N11P GE11GBCFkk_3 V3	Ci5430M	N11PGE1
TM8572G-524G25Mn	GCTWN	S2.TW803.005	TM8572G_N11P GE11GBCFkk_3 V3	Ci5520M	N11PGE1
TM8572G-524G25Mn	GCTWN	S2.TW803.009	TM8572G_N11P GE11GBCFkk_3 V3	Ci5520M	N11PGE1
TM8572G-524G25Mn	WW	S2.TW803.006	TM8572G_N11P GE11GBCFkk_3 V3	Ci5520M	N11PGE1
TM8572G-524G25Mn	WW	S2.TW803.010	TM8572G_N11P GE11GBCFkk_3 V3	Ci5520M	N11PGE1
TM8572G-524G32Mnkk	Australia/ New Zealand	LX.TW803.012	TM8572G_N11P GE11GBCFkk_3 V3	Ci5520M	N11PGE1
TM8572G-524G32Mnkk	Australia/ New Zealand	LX.TXP03.001	TM8572G_N11M GE1512GCkk_3 V3	Ci5520M	N11MGE1
TM8572G-524G50Mnkk	Australia/ New Zealand	LX.TW803.015	TM8572G_N11P GE11GBCFkk_3 V3	Ci5520M	N11PGE1
TM8572G-524G50Mnkk	Canada	LX.TW803.013	TM8572G_N11P GE11GBCFkk_3 V3	Ci5520M	N11PGE1
TM8572G-524G64Mnkk	South Africa	LX.TW803.014	TM8572G_N11P GE11GBCFkk_3 V3	Ci5520M	N11PGE1
TM8572G-526G64Mn	WW	S2.TW803.008	TM8572G_N11P GE11GBCFkk_3 V3	Ci5520M	N11PGE1
TM8572G-528G64Mn	GCTWN	S2.TW803.003	TM8572G_N11P GE11GBCFkk_3 V3	Ci5520M	N11PGE1
TM8572G-528G64Mn	GCTWN	S2.TW803.007	TM8572G_N11P GE11GBCFkk_3 V3	Ci5520M	N11PGE1
TM8572G-528G64Mn	WW	S2.TW803.004	TM8572G_N11P GE11GBCFkk_3 V3	Ci5520M	N11PGE1
TM8572G-528G64Mn	WW	S2.TW803.011	TM8572G_N11P GE11GBCFkk_3 V3	Ci5520M	N11PGE1

TM8572G-5453G50Mnkk	Albania/ Macedonia	LX.TW703.255	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Austria	LX.TW703.025	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Austria	LX.TW703.060	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Austria	LX.TW703.212	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Baltic	LX.TW703.018	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Baltic	LX.TW703.019	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Baltic	LX.TW703.040	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Baltic	LX.TW703.053	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Baltic	LX.TW703.054	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Baltic	LX.TW703.075	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Baltic	LX.TW703.214	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Baltic	LX.TW703.242	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Baltic	LX.TW703.258	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Belgium	LX.TW703.022	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Belgium	LX.TW703.057	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Belgium	LX.TW703.246	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Cyprus	LX.TW703.035	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Cyprus	LX.TW703.070	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci5450M	N11MGE1

TM8572G-5453G50Mnkk	Cyprus	LX.TW703.249	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Czech	LX.TW703.016	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Czech	LX.TW703.051	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Czech	LX.TW703.244	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Denmark	LX.TW703.017	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Denmark	LX.TW703.052	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Denmark	LX.TW703.247	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Finland	LX.TW703.024	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Finland	LX.TW703.059	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Finland	LX.TW703.248	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	France	LX.TW703.029	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	France	LX.TW703.064	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	France	LX.TW703.251	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Germany	LX.TW703.042	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Germany	LX.TW703.077	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Germany	LX.TW703.252	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Greece	LX.TW703.030	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Greece	LX.TW703.065	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1

TM8572G-5453G50Mnkk	Greece	LX.TW703.257	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Holland	LX.TW703.044	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Holland	LX.TW703.079	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Holland	LX.TW703.215	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Hungary	LX.TW703.031	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Hungary	LX.TW703.066	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Hungary	LX.TW703.253	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Israel	LX.TW703.039	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Israel	LX.TW703.041	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Israel	LX.TW703.074	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Israel	LX.TW703.076	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Israel	LX.TW703.259	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Italy	LX.TW703.028	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Italy	LX.TW703.063	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Italy	LX.TW703.243	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Latvia	LX.TW703.026	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Latvia	LX.TW703.049	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Latvia	LX.TW703.061	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1

TM8572G-5453G50Mnkk	Latvia	LX.TW703.084	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Luxembou rg	LX.TW703.047	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Luxembou rg	LX.TW703.082	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Luxembou rg	LX.TW703.254	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Norway	LX.TW703.023	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Norway	LX.TW703.048	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Norway	LX.TW703.058	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Norway	LX.TW703.083	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Norway	LX.TW703.239	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Norway	LX.TW703.245	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Poland	LX.TW703.046	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Poland	LX.TW703.081	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Poland	LX.TW703.240	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Portugal	LX.TW703.015	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Portugal	LX.TW703.050	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Portugal	LX.TW703.213	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Spain	LX.TW703.027	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Spain	LX.TW703.062	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1

TM8572G-5453G50Mnkk	Spain	LX.TW703.241	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Sweden	LX.TW703.043	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Sweden	LX.TW703.078	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Sweden	LX.TW703.260	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Switzerlan d	LX.TW703.045	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Switzerlan d	LX.TW703.080	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	Switzerlan d	LX.TW703.261	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	UK	LX.TW703.034	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	UK	LX.TW703.069	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5453G50Mnkk	UK	LX.TW703.256	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Albania/ Macedonia	LX.TW703.307	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Algeria	LX.TW703.169	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Austria	LX.TW703.131	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Austria	LX.TW703.289	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Baltic	LX.TW703.124	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Baltic	LX.TW703.125	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Baltic	LX.TW703.146	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Baltic	LX.TW703.291	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1

TM8572G-5454G16Mnkk	Baltic	LX.TW703.296	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Baltic	LX.TW703.310	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Belgium	LX.TW703.128	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Belgium	LX.TW703.301	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Cyprus	LX.TW703.141	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Cyprus	LX.TW703.314	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Czech	LX.TW703.122	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Czech	LX.TW703.298	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Denmark	LX.TW703.123	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Denmark	LX.TW703.302	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Finland	LX.TW703.130	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Finland	LX.TW703.303	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	France	LX.TW703.135	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	France	LX.TW703.316	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Germany	LX.TW703.148	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Germany	LX.TW703.304	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Greece	LX.TW703.136	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Greece	LX.TW703.309	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1

TM8572G-5454G16Mnkk	Holland	LX.TW703.150	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Holland	LX.TW703.292	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Hungary	LX.TW703.137	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Hungary	LX.TW703.305	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Israel	LX.TW703.145	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Israel	LX.TW703.147	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Israel	LX.TW703.311	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Italy	LX.TW703.134	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Italy	LX.TW703.297	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Latvia	LX.TW703.132	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Latvia	LX.TW703.155	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Luxembou rg	LX.TW703.153	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Luxembou rg	LX.TW703.306	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Middle East	LX.TW703.156	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Middle East	LX.TW703.157	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Middle East	LX.TW703.159	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Middle East	LX.TW703.161	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Middle East	LX.TW703.166	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1

TM8572G-5454G16Mnkk	Middle East	LX.TW703.167	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Middle East	LX.TW703.168	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Middle East	LX.TW703.170	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Middle East	LX.TW703.171	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Norway	LX.TW703.129	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Norway	LX.TW703.154	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Norway	LX.TW703.293	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Norway	LX.TW703.299	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Poland	LX.TW703.152	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Poland	LX.TW703.294	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Portugal	LX.TW703.121	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Portugal	LX.TW703.290	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	South Africa	LX.TW703.158	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	South Africa	LX.TW703.160	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	South Africa	LX.TW703.162	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	South Africa	LX.TW703.163	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	South Africa	LX.TW703.165	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Spain	LX.TW703.133	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1

TM8572G-5454G16Mnkk	Spain	LX.TW703.295	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Sweden	LX.TW703.149	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Sweden	LX.TW703.312	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Switzerland	LX.TW703.151	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Switzerland	LX.TW703.313	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	Turkey	LX.TW703.164	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	UK	LX.TW703.140	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G16Mnkk	UK	LX.TW703.308	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G32Mnkk	South Africa	LX.TWH03.002	TM8572G_N11P GE11GBCKk_3V3	Ci5450M	N11PGE1
TM8572G-5454G50Mnk	Germany	LX.TW802.001	TM8572G_N11P GE11GBCFkk_3V3	Ci5450M	N11PGE1
TM8572G-5454G50Mnkk	South Africa	LX.TW703.013	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G50Mnkk	UK	LX.TW703.317	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Albania/ Macedonia	LX.TW703.282	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Austria	LX.TW703.095	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Austria	LX.TW703.262	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Baltic	LX.TW703.088	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Baltic	LX.TW703.089	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Baltic	LX.TW703.111	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1

TM8572G-5454G64Mnkk	Baltic	LX.TW703.264	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Baltic	LX.TW703.269	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Baltic	LX.TW703.285	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Belgium	LX.TW703.092	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Belgium	LX.TW703.273	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Cyprus	LX.TW703.106	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Cyprus	LX.TW703.276	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Czech	LX.TW703.086	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Czech	LX.TW703.271	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Denmark	LX.TW703.087	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Denmark	LX.TW703.274	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Finland	LX.TW703.094	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Finland	LX.TW703.275	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	France	LX.TW703.099	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	France	LX.TW703.278	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Germany	LX.TW703.113	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Germany	LX.TW703.279	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Greece	LX.TW703.101	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1

TM8572G-5454G64Mnkk	Greece	LX.TW703.284	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Holland	LX.TW703.115	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Holland	LX.TW703.265	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Hungary	LX.TW703.102	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Hungary	LX.TW703.280	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Israel	LX.TW703.110	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Israel	LX.TW703.112	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Israel	LX.TW703.286	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Italy	LX.TW703.098	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Italy	LX.TW703.270	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Latvia	LX.TW703.096	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Latvia	LX.TW703.120	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Luxembou rg	LX.TW703.118	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Luxembou rg	LX.TW703.281	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Norway	LX.TW703.093	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Norway	LX.TW703.119	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Norway	LX.TW703.266	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Norway	LX.TW703.272	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1

TM8572G-5454G64Mnkk	Poland	LX.TW703.117	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Poland	LX.TW703.267	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Portugal	LX.TW703.085	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Portugal	LX.TW703.263	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Spain	LX.TW703.097	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Spain	LX.TW703.268	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Sweden	LX.TW703.114	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Sweden	LX.TW703.287	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Switzerlan d	LX.TW703.116	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	Switzerlan d	LX.TW703.288	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	UK	LX.TW703.105	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-5454G64Mnkk	UK	LX.TW703.283	TM8572TG_N11 MGE1512CFkk_3V3	Ci5450M	N11MGE1
TM8572G-624G16Mnkk	Switzerlan d	LX.TXP03.003	TM8572G_N11M GE1512GCkk_3V3	Ci7620M	N11MGE1
TM8572G-624G50Mn	GCTWN	S2.TW803.012	TM8572G_N11P GE11GBCFkk_3V3	Ci7620M	N11PGE1
TM8572G-624G50Mn	WW	S2.TW803.013	TM8572G_N11P GE11GBCFkk_3V3	Ci7620M	N11PGE1
TM8572G-624G50Mnkk	Australia/ New Zealand	LX.TW803.016	TM8572G_N11P GE11GBCFkk_3V3	Ci7620M	N11PGE1
TM8572G-624G64Mn	Germany	LX.TW803.011	TM8572G_N11P GE11GBCFkk_3V3	Ci7620M	N11PGE1
TM8572G-624G64Mnk	Germany	LX.TW802.002	TM8572G_N11P GE11GBCFkk_3V3	Ci7620M	N11PGE1

TM8572G-628G16Mn	GCTWN	S2.TW803.014	TM8572G_N11P GE11GBCFkk_3 V3	Ci7620M	N11PGE1
TM8572G-628G16Mn	WW	S2.TW803.015	TM8572G_N11P GE11GBCFkk_3 V3	Ci7620M	N11PGE1

Model	Country	Acer Part No	VRAM 1	Memory 1	Memory 2
TM8572G-332G16Mn	GCTWN	S2.TW703.001	512M- DDR3 (64*16*4)	SO2GBIII10	N
TM8572G-332G16Mn	GCTWN	S2.TW803.001	1G- DDR3 (64*16*8)	SO2GBIII10	N
TM8572G-332G16Mn	GCTWN	S2.TWH03.001	1G- DDR3 (64*16*8)	SO2GBIII10	N
TM8572G-332G16Mn	GCTWN	S2.TXP02.001	512M- DDR3 (64*16*4)	SO2GBIII10	N
TM8572G-332G16Mn	WW	S2.TW703.002	512M- DDR3 (64*16*4)	SO2GBIII10	N
TM8572G-332G16Mn	WW	S2.TW803.002	1G- DDR3 (64*16*8)	SO2GBIII10	N
TM8572G-332G16Mn	WW	S2.TWH03.002	1G- DDR3 (64*16*8)	SO2GBIII10	N
TM8572G-332G16Mn	WW	S2.TXP02.002	512M- DDR3 (64*16*4)	SO2GBIII10	N
TM8572G-332G50Mnkk	GCTWN	LX.TW803.002	1G- DDR3 (64*16*8)	SO2GBIII10	N
TM8572G-334G32Mn	South Africa	LX.TW803.003	1G- DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10
TM8572G-334G50Mn	South Africa	LX.TW803.004	1G- DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10

TM8572G-334G64Mn	South Africa	LX.TW803.005	1G-DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10
TM8572G-353G32Mnkk	Albania/ Macedonia	LX.TW703.232	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Austria	LX.TW703.182	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Austria	LX.TW703.208	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Baltic	LX.TW703.175	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Baltic	LX.TW703.176	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Baltic	LX.TW703.197	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Baltic	LX.TW703.210	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Baltic	LX.TW703.219	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Baltic	LX.TW703.235	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Belgium	LX.TW703.179	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Belgium	LX.TW703.223	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Cyprus	LX.TW703.192	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10

TM8572G-353G32Mnkk	Cyprus	LX.TW703.226	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Czech	LX.TW703.173	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Czech	LX.TW703.221	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Denmark	LX.TW703.174	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Denmark	LX.TW703.224	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Finland	LX.TW703.181	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Finland	LX.TW703.225	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	France	LX.TW703.186	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	France	LX.TW703.228	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Germany	LX.TW703.203	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Germany	LX.TW703.229	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Greece	LX.TW703.187	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Greece	LX.TW703.234	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10

TM8572G-353G32Mnkk	Holland	LX.TW703.205	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Holland	LX.TW703.211	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Hungary	LX.TW703.188	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Hungary	LX.TW703.230	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Israel	LX.TW703.196	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Israel	LX.TW703.202	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Israel	LX.TW703.236	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Italy	LX.TW703.185	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Italy	LX.TW703.220	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Latvia	LX.TW703.183	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Latvia	LX.TW703.201	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Luxembourg	LX.TW703.198	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Luxembourg	LX.TW703.231	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10

TM8572G-353G32Mnkk	Norway	LX.TW703.180	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Norway	LX.TW703.199	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Norway	LX.TW703.216	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Norway	LX.TW703.222	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Poland	LX.TW703.207	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Poland	LX.TW703.217	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Portugal	LX.TW703.172	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Portugal	LX.TW703.209	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Spain	LX.TW703.184	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Spain	LX.TW703.218	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Sweden	LX.TW703.204	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Sweden	LX.TW703.237	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	Switzerland	LX.TW703.206	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10

TM8572G-353G32Mnkk	Switzerland	LX.TW703.238	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	UK	LX.TW703.191	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-353G32Mnkk	UK	LX.TW703.233	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-354G32Mn	Spain	LX.TW803.010	1G-DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10
TM8572G-354G50Mnkk	Switzerland	LX.TXP03.002	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-432G50Mnkk	GCTWN	LX.TW803.001	1G-DDR3 (64*16*8)	SO2GBIII10	N
TM8572G-434G25Mn	GCTWN	S2.TW703.003	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-434G25Mn	GCTWN	S2.TW703.005	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-434G25Mn	South Africa	LX.TW803.009	1G-DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10
TM8572G-434G25Mn	WW	S2.TW703.004	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-434G25Mn	WW	S2.TW703.006	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-434G32Mn	South Africa	LX.TW803.008	1G-DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10
TM8572G-434G32Mn	South Africa	LX.TWH03.001	1G-DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10

TM8572G-434G50Mn	South Africa	LX.TW803.007	1G-DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10
TM8572G-434G50Mnkk	Germany	LX.TW802.003	1G-DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10
TM8572G-434G64Mn	South Africa	LX.TW803.006	1G-DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10
TM8572G-434G64Mnkk	Germany	LX.TW802.004	1G-DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10
TM8572G-524G25Mn	GCTWN	S2.TW803.005	1G-DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10
TM8572G-524G25Mn	GCTWN	S2.TW803.009	1G-DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10
TM8572G-524G25Mn	WW	S2.TW803.006	1G-DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10
TM8572G-524G25Mn	WW	S2.TW803.010	1G-DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10
TM8572G-524G32Mnkk	Australia/ New Zealand	LX.TW803.012	1G-DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10
TM8572G-524G32Mnkk	Australia/ New Zealand	LX.TXP03.001	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-524G50Mnkk	Australia/ New Zealand	LX.TW803.015	1G-DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10
TM8572G-524G50Mnkk	Canada	LX.TW803.013	1G-DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10
TM8572G-524G64Mnkk	South Africa	LX.TW803.014	1G-DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10

TM8572G-526G64Mn	WW	S2.TW803.008	1G-DDR3 (64*16*8)	SO2GBIII10	SO4GBIII10
TM8572G-528G64Mn	GCTWN	S2.TW803.003	1G-DDR3 (64*16*8)	SO4GBIII10	SO4GBIII10
TM8572G-528G64Mn	GCTWN	S2.TW803.007	1G-DDR3 (64*16*8)	SO4GBIII10	SO4GBIII10
TM8572G-528G64Mn	WW	S2.TW803.004	1G-DDR3 (64*16*8)	SO4GBIII10	SO4GBIII10
TM8572G-528G64Mn	WW	S2.TW803.011	1G-DDR3 (64*16*8)	SO4GBIII10	SO4GBIII10
TM8572G-5453G50Mnkk	Albania/ Macedonia	LX.TW703.255	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Austria	LX.TW703.025	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Austria	LX.TW703.060	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Austria	LX.TW703.212	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Baltic	LX.TW703.018	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Baltic	LX.TW703.019	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Baltic	LX.TW703.040	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Baltic	LX.TW703.053	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10

TM8572G-5453G50Mnkk	Baltic	LX.TW703.054	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Baltic	LX.TW703.075	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Baltic	LX.TW703.214	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Baltic	LX.TW703.242	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Baltic	LX.TW703.258	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Belgium	LX.TW703.022	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Belgium	LX.TW703.057	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Belgium	LX.TW703.246	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Cyprus	LX.TW703.035	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Cyprus	LX.TW703.070	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Cyprus	LX.TW703.249	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Czech	LX.TW703.016	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Czech	LX.TW703.051	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10

TM8572G-5453G50Mnkk	Czech	LX.TW703.244	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Denmark	LX.TW703.017	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Denmark	LX.TW703.052	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Denmark	LX.TW703.247	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Finland	LX.TW703.024	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Finland	LX.TW703.059	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Finland	LX.TW703.248	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	France	LX.TW703.029	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	France	LX.TW703.064	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	France	LX.TW703.251	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Germany	LX.TW703.042	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Germany	LX.TW703.077	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Germany	LX.TW703.252	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10

TM8572G-5453G50Mnkk	Greece	LX.TW703.030	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Greece	LX.TW703.065	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Greece	LX.TW703.257	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Holland	LX.TW703.044	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Holland	LX.TW703.079	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Holland	LX.TW703.215	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Hungary	LX.TW703.031	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Hungary	LX.TW703.066	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Hungary	LX.TW703.253	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Israel	LX.TW703.039	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Israel	LX.TW703.041	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Israel	LX.TW703.074	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Israel	LX.TW703.076	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10

TM8572G-5453G50Mnkk	Israel	LX.TW703.259	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Italy	LX.TW703.028	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Italy	LX.TW703.063	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Italy	LX.TW703.243	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Latvia	LX.TW703.026	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Latvia	LX.TW703.049	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Latvia	LX.TW703.061	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Latvia	LX.TW703.084	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Luxembourg	LX.TW703.047	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Luxembourg	LX.TW703.082	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Luxembourg	LX.TW703.254	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Norway	LX.TW703.023	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Norway	LX.TW703.048	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10

TM8572G-5453G50Mnkk	Norway	LX.TW703.058	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Norway	LX.TW703.083	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Norway	LX.TW703.239	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Norway	LX.TW703.245	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Poland	LX.TW703.046	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Poland	LX.TW703.081	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Poland	LX.TW703.240	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Portugal	LX.TW703.015	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Portugal	LX.TW703.050	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Portugal	LX.TW703.213	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Spain	LX.TW703.027	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Spain	LX.TW703.062	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Spain	LX.TW703.241	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10

TM8572G-5453G50Mnkk	Sweden	LX.TW703.043	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Sweden	LX.TW703.078	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Sweden	LX.TW703.260	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Switzerland	LX.TW703.045	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Switzerland	LX.TW703.080	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	Switzerland	LX.TW703.261	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	UK	LX.TW703.034	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	UK	LX.TW703.069	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5453G50Mnkk	UK	LX.TW703.256	512M-DDR3 (64*16*4)	SO2GBIII10	SO1GBIII10
TM8572G-5454G16Mnkk	Albania/ Macedonia	LX.TW703.307	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Algeria	LX.TW703.169	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Austria	LX.TW703.131	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Austria	LX.TW703.289	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10

TM8572G-5454G16Mnkk	Baltic	LX.TW703.124	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Baltic	LX.TW703.125	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Baltic	LX.TW703.146	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Baltic	LX.TW703.291	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Baltic	LX.TW703.296	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Baltic	LX.TW703.310	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Belgium	LX.TW703.128	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Belgium	LX.TW703.301	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Cyprus	LX.TW703.141	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Cyprus	LX.TW703.314	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Czech	LX.TW703.122	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Czech	LX.TW703.298	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Denmark	LX.TW703.123	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10

TM8572G-5454G16Mnkk	Denmark	LX.TW703.302	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Finland	LX.TW703.130	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Finland	LX.TW703.303	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	France	LX.TW703.135	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	France	LX.TW703.316	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Germany	LX.TW703.148	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Germany	LX.TW703.304	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Greece	LX.TW703.136	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Greece	LX.TW703.309	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Holland	LX.TW703.150	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Holland	LX.TW703.292	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Hungary	LX.TW703.137	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Hungary	LX.TW703.305	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10

TM8572G-5454G16Mnkk	Israel	LX.TW703.145	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Israel	LX.TW703.147	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Israel	LX.TW703.311	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Italy	LX.TW703.134	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Italy	LX.TW703.297	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Latvia	LX.TW703.132	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Latvia	LX.TW703.155	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Luxembourg	LX.TW703.153	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Luxembourg	LX.TW703.306	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Middle East	LX.TW703.156	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Middle East	LX.TW703.157	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Middle East	LX.TW703.159	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Middle East	LX.TW703.161	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10

TM8572G-5454G16Mnkk	Middle East	LX.TW703.166	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Middle East	LX.TW703.167	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Middle East	LX.TW703.168	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Middle East	LX.TW703.170	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Middle East	LX.TW703.171	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Norway	LX.TW703.129	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Norway	LX.TW703.154	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Norway	LX.TW703.293	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Norway	LX.TW703.299	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Poland	LX.TW703.152	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Poland	LX.TW703.294	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Portugal	LX.TW703.121	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Portugal	LX.TW703.290	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10

TM8572G-5454G16Mnkk	South Africa	LX.TW703.158	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	South Africa	LX.TW703.160	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	South Africa	LX.TW703.162	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	South Africa	LX.TW703.163	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	South Africa	LX.TW703.165	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Spain	LX.TW703.133	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Spain	LX.TW703.295	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Sweden	LX.TW703.149	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Sweden	LX.TW703.312	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Switzerland	LX.TW703.151	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Switzerland	LX.TW703.313	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	Turkey	LX.TW703.164	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G16Mnkk	UK	LX.TW703.140	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10

TM8572G-5454G16Mnkk	UK	LX.TW703.308	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G32Mnkk	South Africa	LX.TWH03.002	1G-DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10
TM8572G-5454G50Mnk	Germany	LX.TW802.001	1G-DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10
TM8572G-5454G50Mnkk	South Africa	LX.TW703.013	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G50Mnkk	UK	LX.TW703.317	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Albania/ Macedonia	LX.TW703.282	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Austria	LX.TW703.095	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Austria	LX.TW703.262	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Baltic	LX.TW703.088	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Baltic	LX.TW703.089	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Baltic	LX.TW703.111	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Baltic	LX.TW703.264	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Baltic	LX.TW703.269	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10

TM8572G-5454G64Mnkk	Baltic	LX.TW703.285	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Belgium	LX.TW703.092	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Belgium	LX.TW703.273	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Cyprus	LX.TW703.106	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Cyprus	LX.TW703.276	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Czech	LX.TW703.086	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Czech	LX.TW703.271	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Denmark	LX.TW703.087	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Denmark	LX.TW703.274	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Finland	LX.TW703.094	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Finland	LX.TW703.275	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	France	LX.TW703.099	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	France	LX.TW703.278	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10

TM8572G-5454G64Mnkk	Germany	LX.TW703.113	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Germany	LX.TW703.279	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Greece	LX.TW703.101	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Greece	LX.TW703.284	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Holland	LX.TW703.115	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Holland	LX.TW703.265	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Hungary	LX.TW703.102	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Hungary	LX.TW703.280	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Israel	LX.TW703.110	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Israel	LX.TW703.112	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Israel	LX.TW703.286	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Italy	LX.TW703.098	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Italy	LX.TW703.270	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10

TM8572G-5454G64Mnkk	Latvia	LX.TW703.096	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Latvia	LX.TW703.120	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Luxembourg	LX.TW703.118	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Luxembourg	LX.TW703.281	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Norway	LX.TW703.093	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Norway	LX.TW703.119	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Norway	LX.TW703.266	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Norway	LX.TW703.272	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Poland	LX.TW703.117	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Poland	LX.TW703.267	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Portugal	LX.TW703.085	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Portugal	LX.TW703.263	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Spain	LX.TW703.097	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10

TM8572G-5454G64Mnkk	Spain	LX.TW703.268	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Sweden	LX.TW703.114	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Sweden	LX.TW703.287	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Switzerland	LX.TW703.116	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	Switzerland	LX.TW703.288	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	UK	LX.TW703.105	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-5454G64Mnkk	UK	LX.TW703.283	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-624G16Mnkk	Switzerland	LX.TXP03.003	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572G-624G50Mn	GCTWN	S2.TW803.012	1G-DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10
TM8572G-624G50Mn	WW	S2.TW803.013	1G-DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10
TM8572G-624G50Mnkk	Australia/ New Zealand	LX.TW803.016	1G-DDR3 (64*16*8)	SO2GBIII10	SO2GBIII10
TM8572G-624G64Mn	Germany	LX.TW803.011	1G-DDR3 (64*16*8)	SO4GBIII10	N
TM8572G-624G64Mnkk	Germany	LX.TW802.002	1G-DDR3 (64*16*8)	SO4GBIII10	N

TM8572G-628G16Mn	GCTWN	S2.TW803.014	1G-DDR3 (64*16*8)	SO4GBIII10	SO4GBIII10
TM8572G-628G16Mn	WW	S2.TW803.015	1G-DDR3 (64*16*8)	SO4GBIII10	SO4GBIII10

Model	Country	Acer Part No	HDD 1(GB)	Wireless LAN1
TM8572G-332G16Mn	GCTWN	S2.TW703.001	N160GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-332G16Mn	GCTWN	S2.TW803.001	N160GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-332G16Mn	GCTWN	S2.TWH03.001	N160GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-332G16Mn	GCTWN	S2.TXP02.001	N160GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-332G16Mn	WW	S2.TW703.002	N160GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-332G16Mn	WW	S2.TW803.002	N160GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-332G16Mn	WW	S2.TWH03.002	N160GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-332G16Mn	WW	S2.TXP02.002	N160GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-332G50Mnkk	GCTWN	LX.TW803.002	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-334G32Mn	South Africa	LX.TW803.003	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-334G50Mn	South Africa	LX.TW803.004	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-334G64Mn	South Africa	LX.TW803.005	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Albania/ Macedonia	LX.TW703.232	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Austria	LX.TW703.182	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Austria	LX.TW703.208	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Baltic	LX.TW703.175	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Baltic	LX.TW703.176	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Baltic	LX.TW703.197	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Baltic	LX.TW703.210	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Baltic	LX.TW703.219	N320GB5.4KS	3rd WiFi 2x2 BGN

TM8572G-353G32Mnkk	Baltic	LX.TW703.235	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Belgium	LX.TW703.179	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Belgium	LX.TW703.223	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Cyprus	LX.TW703.192	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Cyprus	LX.TW703.226	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Czech	LX.TW703.173	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Czech	LX.TW703.221	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Denmark	LX.TW703.174	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Denmark	LX.TW703.224	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Finland	LX.TW703.181	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Finland	LX.TW703.225	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	France	LX.TW703.186	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	France	LX.TW703.228	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Germany	LX.TW703.203	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Germany	LX.TW703.229	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Greece	LX.TW703.187	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Greece	LX.TW703.234	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Holland	LX.TW703.205	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Holland	LX.TW703.211	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Hungary	LX.TW703.188	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Hungary	LX.TW703.230	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Israel	LX.TW703.196	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Israel	LX.TW703.202	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Israel	LX.TW703.236	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Italy	LX.TW703.185	N320GB5.4KS	3rd WiFi 2x2 BGN

TM8572G-353G32Mnkk	Italy	LX.TW703.220	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Latvia	LX.TW703.183	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Latvia	LX.TW703.201	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Luxembo urg	LX.TW703.198	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Luxembo urg	LX.TW703.231	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Norway	LX.TW703.180	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Norway	LX.TW703.199	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Norway	LX.TW703.216	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Norway	LX.TW703.222	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Poland	LX.TW703.207	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Poland	LX.TW703.217	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Portugal	LX.TW703.172	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Portugal	LX.TW703.209	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Spain	LX.TW703.184	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Spain	LX.TW703.218	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Sweden	LX.TW703.204	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Sweden	LX.TW703.237	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Switzerla nd	LX.TW703.206	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	Switzerla nd	LX.TW703.238	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	UK	LX.TW703.191	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-353G32Mnkk	UK	LX.TW703.233	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-354G32Mn	Spain	LX.TW803.010	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-354G50Mnkk	Switzerla nd	LX.TXP03.002	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-432G50Mnkk	GCTWN	LX.TW803.001	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-434G25Mn	GCTWN	S2.TW703.003	N250GB5.4KS	3rd WiFi 2x2 BGN

TM8572G-434G25Mn	GCTWN	S2.TW703.005	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-434G25Mn	South Africa	LX.TW803.009	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-434G25Mn	WW	S2.TW703.004	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-434G25Mn	WW	S2.TW703.006	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-434G32Mn	South Africa	LX.TW803.008	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-434G32Mn	South Africa	LX.TWH03.001	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-434G50Mn	South Africa	LX.TW803.007	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-434G50Mnkk	Germany	LX.TW802.003	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-434G64Mn	South Africa	LX.TW803.006	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-434G64Mnkk	Germany	LX.TW802.004	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-524G25Mn	GCTWN	S2.TW803.005	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-524G25Mn	GCTWN	S2.TW803.009	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-524G25Mn	WW	S2.TW803.006	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-524G25Mn	WW	S2.TW803.010	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-524G32Mnkk	Australia/ New Zealand	LX.TW803.012	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-524G32Mnkk	Australia/ New Zealand	LX.TXP03.001	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-524G50Mnkk	Australia/ New Zealand	LX.TW803.015	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-524G50Mnkk	Canada	LX.TW803.013	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-524G64Mnkk	South Africa	LX.TW803.014	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-526G64Mn	WW	S2.TW803.008	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-528G64Mn	GCTWN	S2.TW803.003	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-528G64Mn	GCTWN	S2.TW803.007	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-528G64Mn	WW	S2.TW803.004	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-528G64Mn	WW	S2.TW803.011	N640GB5.4KS	3rd WiFi 2x2 BGN

TM8572G-5453G50Mnkk	Albania/ Macedonia	LX.TW703.255	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Austria	LX.TW703.025	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Austria	LX.TW703.060	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Austria	LX.TW703.212	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Baltic	LX.TW703.018	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Baltic	LX.TW703.019	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Baltic	LX.TW703.040	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Baltic	LX.TW703.053	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Baltic	LX.TW703.054	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Baltic	LX.TW703.075	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Baltic	LX.TW703.214	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Baltic	LX.TW703.242	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Baltic	LX.TW703.258	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Belgium	LX.TW703.022	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Belgium	LX.TW703.057	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Belgium	LX.TW703.246	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Cyprus	LX.TW703.035	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Cyprus	LX.TW703.070	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Cyprus	LX.TW703.249	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Czech	LX.TW703.016	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Czech	LX.TW703.051	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Czech	LX.TW703.244	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Denmark	LX.TW703.017	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Denmark	LX.TW703.052	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Denmark	LX.TW703.247	N500GB7.2KS	3rd WiFi 2x2 BGN

TM8572G-5453G50Mnkk	Finland	LX.TW703.024	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Finland	LX.TW703.059	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Finland	LX.TW703.248	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	France	LX.TW703.029	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	France	LX.TW703.064	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	France	LX.TW703.251	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Germany	LX.TW703.042	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Germany	LX.TW703.077	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Germany	LX.TW703.252	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Greece	LX.TW703.030	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Greece	LX.TW703.065	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Greece	LX.TW703.257	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Holland	LX.TW703.044	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Holland	LX.TW703.079	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Holland	LX.TW703.215	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Hungary	LX.TW703.031	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Hungary	LX.TW703.066	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Hungary	LX.TW703.253	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Israel	LX.TW703.039	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Israel	LX.TW703.041	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Israel	LX.TW703.074	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Israel	LX.TW703.076	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Israel	LX.TW703.259	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Italy	LX.TW703.028	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Italy	LX.TW703.063	N500GB7.2KS	3rd WiFi 2x2 BGN

TM8572G-5453G50Mnkk	Italy	LX.TW703.243	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Latvia	LX.TW703.026	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Latvia	LX.TW703.049	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Latvia	LX.TW703.061	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Latvia	LX.TW703.084	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Luxembo urg	LX.TW703.047	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Luxembo urg	LX.TW703.082	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Luxembo urg	LX.TW703.254	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Norway	LX.TW703.023	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Norway	LX.TW703.048	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Norway	LX.TW703.058	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Norway	LX.TW703.083	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Norway	LX.TW703.239	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Norway	LX.TW703.245	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Poland	LX.TW703.046	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Poland	LX.TW703.081	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Poland	LX.TW703.240	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Portugal	LX.TW703.015	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Portugal	LX.TW703.050	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Portugal	LX.TW703.213	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Spain	LX.TW703.027	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Spain	LX.TW703.062	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Spain	LX.TW703.241	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Sweden	LX.TW703.043	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Sweden	LX.TW703.078	N500GB7.2KS	3rd WiFi 2x2 BGN

TM8572G-5453G50Mnkk	Sweden	LX.TW703.260	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Switzerla nd	LX.TW703.045	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Switzerla nd	LX.TW703.080	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	Switzerla nd	LX.TW703.261	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	UK	LX.TW703.034	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	UK	LX.TW703.069	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5453G50Mnkk	UK	LX.TW703.256	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Albania/ Macedon ia	LX.TW703.307	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Algeria	LX.TW703.169	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Austria	LX.TW703.131	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Austria	LX.TW703.289	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Baltic	LX.TW703.124	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Baltic	LX.TW703.125	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Baltic	LX.TW703.146	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Baltic	LX.TW703.291	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Baltic	LX.TW703.296	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Baltic	LX.TW703.310	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Belgium	LX.TW703.128	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Belgium	LX.TW703.301	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Cyprus	LX.TW703.141	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Cyprus	LX.TW703.314	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Czech	LX.TW703.122	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Czech	LX.TW703.298	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Denmark	LX.TW703.123	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Denmark	LX.TW703.302	SSD25160	3rd WiFi 2x2 BGN

TM8572G-5454G16Mnkk	Finland	LX.TW703.130	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Finland	LX.TW703.303	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	France	LX.TW703.135	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	France	LX.TW703.316	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Germany	LX.TW703.148	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Germany	LX.TW703.304	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Greece	LX.TW703.136	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Greece	LX.TW703.309	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Holland	LX.TW703.150	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Holland	LX.TW703.292	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Hungary	LX.TW703.137	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Hungary	LX.TW703.305	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Israel	LX.TW703.145	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Israel	LX.TW703.147	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Israel	LX.TW703.311	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Italy	LX.TW703.134	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Italy	LX.TW703.297	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Latvia	LX.TW703.132	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Latvia	LX.TW703.155	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Luxembo urg	LX.TW703.153	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Luxembo urg	LX.TW703.306	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Middle East	LX.TW703.156	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Middle East	LX.TW703.157	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Middle East	LX.TW703.159	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Middle East	LX.TW703.161	SSD25160	3rd WiFi 2x2 BGN

TM8572G-5454G16Mnkk	Middle East	LX.TW703.166	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Middle East	LX.TW703.167	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Middle East	LX.TW703.168	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Middle East	LX.TW703.170	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Middle East	LX.TW703.171	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Norway	LX.TW703.129	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Norway	LX.TW703.154	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Norway	LX.TW703.293	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Norway	LX.TW703.299	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Poland	LX.TW703.152	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Poland	LX.TW703.294	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Portugal	LX.TW703.121	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Portugal	LX.TW703.290	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	South Africa	LX.TW703.158	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	South Africa	LX.TW703.160	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	South Africa	LX.TW703.162	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	South Africa	LX.TW703.163	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	South Africa	LX.TW703.165	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Spain	LX.TW703.133	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Spain	LX.TW703.295	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Sweden	LX.TW703.149	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Sweden	LX.TW703.312	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Switzerland	LX.TW703.151	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Switzerland	LX.TW703.313	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	Turkey	LX.TW703.164	SSD25160	3rd WiFi 2x2 BGN

TM8572G-5454G16Mnkk	UK	LX.TW703.140	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G16Mnkk	UK	LX.TW703.308	SSD25160	3rd WiFi 2x2 BGN
TM8572G-5454G32Mnkk	South Africa	LX.TWH03.002	N320GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5454G50Mnk	Germany	LX.TW802.001	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G50Mnkk	South Africa	LX.TW703.013	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5454G50Mnkk	UK	LX.TW703.317	N500GB7.2KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Albania/ Macedonia	LX.TW703.282	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Austria	LX.TW703.095	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Austria	LX.TW703.262	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Baltic	LX.TW703.088	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Baltic	LX.TW703.089	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Baltic	LX.TW703.111	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Baltic	LX.TW703.264	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Baltic	LX.TW703.269	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Baltic	LX.TW703.285	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Belgium	LX.TW703.092	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Belgium	LX.TW703.273	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Cyprus	LX.TW703.106	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Cyprus	LX.TW703.276	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Czech	LX.TW703.086	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Czech	LX.TW703.271	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Denmark	LX.TW703.087	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Denmark	LX.TW703.274	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Finland	LX.TW703.094	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Finland	LX.TW703.275	N640GB5.4KS	3rd WiFi 2x2 BGN

TM8572G-5454G64Mnkk	France	LX.TW703.099	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	France	LX.TW703.278	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Germany	LX.TW703.113	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Germany	LX.TW703.279	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Greece	LX.TW703.101	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Greece	LX.TW703.284	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Holland	LX.TW703.115	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Holland	LX.TW703.265	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Hungary	LX.TW703.102	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Hungary	LX.TW703.280	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Israel	LX.TW703.110	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Israel	LX.TW703.112	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Israel	LX.TW703.286	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Italy	LX.TW703.098	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Italy	LX.TW703.270	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Latvia	LX.TW703.096	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Latvia	LX.TW703.120	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Luxembo urg	LX.TW703.118	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Luxembo urg	LX.TW703.281	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Norway	LX.TW703.093	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Norway	LX.TW703.119	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Norway	LX.TW703.266	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Norway	LX.TW703.272	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Poland	LX.TW703.117	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Poland	LX.TW703.267	N640GB5.4KS	3rd WiFi 2x2 BGN

TM8572G-5454G64Mnkk	Portugal	LX.TW703.085	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Portugal	LX.TW703.263	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Spain	LX.TW703.097	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Spain	LX.TW703.268	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Sweden	LX.TW703.114	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Sweden	LX.TW703.287	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Switzerland	LX.TW703.116	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	Switzerland	LX.TW703.288	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	UK	LX.TW703.105	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-5454G64Mnkk	UK	LX.TW703.283	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-624G16Mnkk	Switzerland	LX.TXP03.003	SSD25160	3rd WiFi 2x2 BGN
TM8572G-624G50Mn	GCTWN	S2.TW803.012	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-624G50Mn	WW	S2.TW803.013	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-624G50Mnkk	Australia/ New Zealand	LX.TW803.016	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-624G64Mn	Germany	LX.TW803.011	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-624G64Mn	Germany	LX.TW802.002	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572G-628G16Mn	GCTWN	S2.TW803.014	SSD25160	3rd WiFi 2x2 BGN
TM8572G-628G16Mn	WW	S2.TW803.015	SSD25160	3rd WiFi 2x2 BGN

Acer TravelMate TM8572T

Model	RO	Country	Acer Part No	Description
TM8572T-353G32Mnkk	EMEA	Austria	LX.TW602.016	TM8572T-353G32Mnkk W7HP64TRAT1 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_DE61
TM8572T-353G32Mnkk	EMEA	Baltic	LX.TW602.024	TM8572T-353G32Mnkk W7HP64TRBC5 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_LT11

TM8572T-353G32Mnkk	EMEA	Baltic	LX.TW602.027	TM8572T-353G32Mnkk W7HP64TRBC3 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/ bgn_FP_1.3C_MA_SV21
TM8572T-353G32Mnkk	EMEA	Baltic	LX.TW602.030	TM8572T-353G32Mnkk W7HP64TRBC4 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/ bgn_FP_1.3C_MA_LT11
TM8572T-353G32Mnkk	EMEA	Belgium	LX.TW602.026	TM8572T-353G32Mnkk W7HP64TRBE1 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/ bgn_FP_1.3C_MA_NL11
TM8572T-353G32Mnkk	EMEA	Cyprus	LX.TW602.002	TM8572T-353G32Mnkk W7HP64TRCY1 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/ bgn_FP_1.3C_MA_ES61
TM8572T-353G32Mnkk	EMEA	Czech	LX.TW602.017	TM8572T-353G32Mnkk W7HP64TRCZ2 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/ bgn_FP_1.3C_MA_SK11
TM8572T-353G32Mnkk	EMEA	Denmark	LX.TW602.014	TM8572T-353G32Mnkk W7HP64TRDK1 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/ bgn_FP_1.3C_MA_NO11
TM8572T-353G32Mnkk	EMEA	Denmark	LX.TW602.018	TM8572T-353G32Mnkk W7HP64TRDK2 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/ bgn_FP_1.3C_MA_ENS1
TM8572T-353G32Mnkk	EMEA	Finland	LX.TW602.004	TM8572T-353G32Mnkk W7HP64TRFI2 MC UMACFkk_3 2G+1G/320/BT/6L3.0/ 5R/bgn_FP_1.3C_MA_FI11
TM8572T-353G32Mnkk	EMEA	France	LX.TW602.021	TM8572T-353G32Mnkk W7HP64TRFR1 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/ bgn_FP_1.3C_MA_ES81
TM8572T-353G32Mnkk	EMEA	Germany	LX.TW602.015	TM8572T-353G32Mnkk W7HP64TRDE1 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/ bgn_FP_1.3C_MA_DE61
TM8572T-353G32Mnkk	EMEA	Greece	LX.TW602.003	TM8572T-353G32Mnkk W7HP64TRGR1 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/ bgn_FP_1.3C_MA_EL31
TM8572T-353G32Mnkk	EMEA	Holland	LX.TW602.033	TM8572T-353G32Mnkk W7HP64TRNL1 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/ bgn_FP_1.3C_MA_NL11
TM8572T-353G32Mnkk	EMEA	Hungary	LX.TW602.031	TM8572T-353G32Mnkk W7HP64TRHU1 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/ bgn_FP_1.3C_MA_HU11
TM8572T-353G32Mnkk	EMEA	Israel	LX.TW602.005	TM8572T-353G32Mnkk W7HP64TRIL1 MC UMACFkk_3 2G+1G/320/BT/6L3.0/ 5R/bgn_FP_1.3C_MA_HE11

TM8572T-353G32Mnkk	EMEA	Italy	LX.TW602.011	TM8572T-353G32Mnkk W7HP64TRIT1 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_IT11
TM8572T-353G32Mnkk	EMEA	Latvia	LX.TW602.013	TM8572T-353G32Mnkk W7HP64TRLV1 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_RU21
TM8572T-353G32Mnkk	EMEA	Latvia	LX.TW602.036	TM8572T-353G32Mnkk W7HP64TRLV1 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_LT11
TM8572T-353G32Mnkk	EMEA	Luxembou rg	LX.TW602.019	TM8572T-353G32Mnkk W7HP64TRLU3 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_IT41
TM8572T-353G32Mnkk	EMEA	Middle East	LX.TW602.037	TM8572T-353G32Mnkk EM W7HP64EMTRME2 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_AR21
TM8572T-353G32Mnkk	EMEA	Middle East	LX.TW602.038	TM8572T-353G32Mnkk EM W7HP64EMTRME2 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_AR11
TM8572T-353G32Mnkk	EMEA	Middle East	LX.TW602.039	TM8572T-353G32Mnkk EM W7HP64EMTRME4 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_RU61
TM8572T-353G32Mnkk	EMEA	Middle East	LX.TW602.040	TM8572T-353G32Mnkk EM W7HP64EMTRME9 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES81
TM8572T-353G32Mnkk	EMEA	Middle East	LX.TW602.041	TM8572T-353G32Mnkk EM W7HP64EMTRME2 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572T-353G32Mnkk	EMEA	Middle East	LX.TW602.042	TM8572T-353G32Mnkk EM W7HP64EMTRMEB MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ARA1
TM8572T-353G32Mnkk	EMEA	Middle East	LX.TW602.045	TM8572T-353G32Mnkk EM W7HP64EMTRME3 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES81
TM8572T-353G32Mnkk	EMEA	Middle East	LX.TW602.049	TM8572T-353G32Mnkk EM W7HP64EMTRME6 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572T-353G32Mnkk	EMEA	Norway	LX.TW602.023	TM8572T-353G32Mnkk W7HP64TRNO3 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ENS2
TM8572T-353G32Mnkk	EMEA	Norway	LX.TW602.034	TM8572T-353G32Mnkk W7HP64TRNO1 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_NO11

TM8572T-353G32Mnkk	EMEA	Poland	LX.TW602.006	TM8572T-353G32MnkkW7HP64TRPL1 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_PL71
TM8572T-353G32Mnkk	EMEA	Portugal	LX.TW602.022	TM8572T-353G32MnkkW7HP64TRPT1 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_PT11
TM8572T-353G32Mnkk	EMEA	South Africa	LX.TW602.043	TM8572T-353G32Mnkk EM W7HP64EMTRZA2 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572T-353G32Mnkk	EMEA	South Africa	LX.TW602.044	TM8572T-353G32Mnkk EM W7HP64EMTRZA4 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ENA1
TM8572T-353G32Mnkk	EMEA	South Africa	LX.TW602.046	TM8572T-353G32Mnkk EM W7HP64EMTRZA6 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_PT11
TM8572T-353G32Mnkk	EMEA	South Africa	LX.TW602.047	TM8572T-353G32Mnkk EM W7HP64EMTRZA5 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572T-353G32Mnkk	EMEA	South Africa	LX.TW602.050	TM8572T-353G32Mnkk EM W7HP64EMTRZA1 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES81
TM8572T-353G32Mnkk	EMEA	Spain	LX.TW602.029	TM8572T-353G32Mnkk W7HP64TRES1 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES51
TM8572T-353G32Mnkk	EMEA	Sweden	LX.TW602.025	TM8572T-353G32Mnkk W7HP64TRSE1 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_FI11
TM8572T-353G32Mnkk	EMEA	Switzerland	LX.TW602.035	TM8572T-353G32Mnkk W7HP64TRCH1 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_IT41
TM8572T-353G32Mnkk	EMEA	Turkey	LX.TW602.048	TM8572T-353G32Mnkk EM W7HP64EMTRTR1 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_TR31
TM8572T-353G32Mnkk	EMEA	UK	LX.TW602.010	TM8572T-353G32Mnkk W7HP64TRGB1 MC UMACFkk_3 2G+1G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572T-354G32Mnkk	EMEA	Germany	LX.TW602.001	TM8572T-354G32Mnkk W7HP64TRDE1 MC UMACFkk_3 2*2G/320/BT/6L3.0/5R/bgn_FP_1.3C_MA_DE61

Model	Country	Acer Part No	BOM Name	CPU	VGA Chip
TM8572T-353G32Mnkk	Austria	LX.TW602.016	TM8572T_UMACFkk_3	Ci3350M	UMA

TM8572T-353G32Mnkk	Baltic	LX.TW602.024	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Baltic	LX.TW602.027	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Baltic	LX.TW602.030	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Belgium	LX.TW602.026	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Cyprus	LX.TW602.002	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Czech	LX.TW602.017	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Denmark	LX.TW602.014	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Denmark	LX.TW602.018	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Finland	LX.TW602.004	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	France	LX.TW602.021	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Germany	LX.TW602.015	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Greece	LX.TW602.003	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Holland	LX.TW602.033	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Hungary	LX.TW602.031	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Israel	LX.TW602.005	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Italy	LX.TW602.011	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Latvia	LX.TW602.013	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Latvia	LX.TW602.036	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Luxembou rg	LX.TW602.019	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Middle East	LX.TW602.037	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Middle East	LX.TW602.038	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Middle East	LX.TW602.039	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Middle East	LX.TW602.040	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Middle East	LX.TW602.041	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Middle East	LX.TW602.042	TM8572T_UMAC Fkk_3	Ci3350M	UMA

TM8572T-353G32Mnkk	Middle East	LX.TW602.045	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Middle East	LX.TW602.049	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Norway	LX.TW602.023	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Norway	LX.TW602.034	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Poland	LX.TW602.006	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Portugal	LX.TW602.022	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	South Africa	LX.TW602.043	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	South Africa	LX.TW602.044	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	South Africa	LX.TW602.046	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	South Africa	LX.TW602.047	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	South Africa	LX.TW602.050	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Spain	LX.TW602.029	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Sweden	LX.TW602.025	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Switzerland	LX.TW602.035	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	Turkey	LX.TW602.048	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-353G32Mnkk	UK	LX.TW602.010	TM8572T_UMAC Fkk_3	Ci3350M	UMA
TM8572T-354G32Mnkk	Germany	LX.TW602.001	TM8572T_UMAC Fkk_3	Ci3350M	UMA

Model	Country	Acer Part No	VRAM 1	Memory 1	Memory 2
TM8572T-353G32Mnkk	Austria	LX.TW602.016	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Baltic	LX.TW602.024	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Baltic	LX.TW602.027	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Baltic	LX.TW602.030	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Belgium	LX.TW602.026	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Cyprus	LX.TW602.002	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Czech	LX.TW602.017	N	SO2GBIII10	SO1GBIII10

TM8572T-353G32Mnkk	Denmark	LX.TW602.014	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Denmark	LX.TW602.018	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Finland	LX.TW602.004	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	France	LX.TW602.021	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Germany	LX.TW602.015	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Greece	LX.TW602.003	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Holland	LX.TW602.033	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Hungary	LX.TW602.031	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Israel	LX.TW602.005	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Italy	LX.TW602.011	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Latvia	LX.TW602.013	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Latvia	LX.TW602.036	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Luxembourg	LX.TW602.019	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Middle East	LX.TW602.037	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Middle East	LX.TW602.038	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Middle East	LX.TW602.039	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Middle East	LX.TW602.040	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Middle East	LX.TW602.041	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Middle East	LX.TW602.042	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Middle East	LX.TW602.045	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Middle East	LX.TW602.049	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Norway	LX.TW602.023	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Norway	LX.TW602.034	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Poland	LX.TW602.006	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Portugal	LX.TW602.022	N	SO2GBIII10	SO1GBIII10

TM8572T-353G32Mnkk	South Africa	LX.TW602.043	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	South Africa	LX.TW602.044	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	South Africa	LX.TW602.046	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	South Africa	LX.TW602.047	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	South Africa	LX.TW602.050	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Spain	LX.TW602.029	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Sweden	LX.TW602.025	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Switzerland	LX.TW602.035	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	Turkey	LX.TW602.048	N	SO2GBIII10	SO1GBIII10
TM8572T-353G32Mnkk	UK	LX.TW602.010	N	SO2GBIII10	SO1GBIII10
TM8572T-354G32Mnkk	Germany	LX.TW602.001	N	SO2GBIII10	SO2GBIII10

Model	Country	Acer Part No	HDD 1(GB)	Wireless LAN1
TM8572T-353G32Mnkk	Austria	LX.TW602.016	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Baltic	LX.TW602.024	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Baltic	LX.TW602.027	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Baltic	LX.TW602.030	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Belgium	LX.TW602.026	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Cyprus	LX.TW602.002	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Czech	LX.TW602.017	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Denmark	LX.TW602.014	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Denmark	LX.TW602.018	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Finland	LX.TW602.004	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	France	LX.TW602.021	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Germany	LX.TW602.015	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Greece	LX.TW602.003	N320GB5.4KS	3rd WiFi 2x2 BGN

TM8572T-353G32Mnkk	Holland	LX.TW602.033	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Hungary	LX.TW602.031	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Israel	LX.TW602.005	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Italy	LX.TW602.011	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Latvia	LX.TW602.013	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Latvia	LX.TW602.036	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Luxembo urg	LX.TW602.019	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Middle East	LX.TW602.037	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Middle East	LX.TW602.038	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Middle East	LX.TW602.039	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Middle East	LX.TW602.040	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Middle East	LX.TW602.041	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Middle East	LX.TW602.042	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Middle East	LX.TW602.045	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Middle East	LX.TW602.049	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Norway	LX.TW602.023	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Norway	LX.TW602.034	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Poland	LX.TW602.006	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Portugal	LX.TW602.022	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	South Africa	LX.TW602.043	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	South Africa	LX.TW602.044	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	South Africa	LX.TW602.046	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	South Africa	LX.TW602.047	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	South Africa	LX.TW602.050	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Spain	LX.TW602.029	N320GB5.4KS	3rd WiFi 2x2 BGN

TM8572T-353G32Mnkk	Sweden	LX.TW602.025	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Switzerland	LX.TW602.035	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	Turkey	LX.TW602.048	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-353G32Mnkk	UK	LX.TW602.010	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572T-354G32Mnkk	Germany	LX.TW602.001	N320GB5.4KS	3rd WiFi 2x2 BGN

Acer TravelMate TM8572TG

Model	RO	Country	Acer Part No	Description
TM8572TG-332G16Mnkk	WW	GCTWN	S2.TWG03.001	TM8572TG-332G16Mnkk W7PR32TWW1 MC N11MGE1512Ckk_3V3 1*2G/160/6L3.0/ 5R/bgn_1.3C_MA_ES61
TM8572TG-332G16Mnkk	WW	WW	S2.TWG03.002	TM8572TG-332G16Mnkk W7PR32TWW1 MC N11MGE1512Ckk_3V3 1*2G/160/6L3.0/ 5R/bgn_1.3C_MA_ES62
TM8572TG-332G50Mnkk	TWN	GCTWN	LX.TW703.001	TM8572TG-332G50Mnkk W7PR32TRTW1 MC XPP N11MGE1512CFkk_3V3 1*2G/500_L/ BT/6L3.0/5R/bgn_FP_1.3C_MA_TC11
TM8572TG-334G25Mnkk	EMEA	South Africa	LX.TW703.005	TM8572TG-334G25Mnkk EM W7PR32EMTRZA2 MC XPP N11MGE1512CFkk_3V3 2*2G/250/BT/ 6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572TG-334G32Mnkk	EMEA	South Africa	LX.TW703.006	TM8572TG-334G32Mnkk EM W7PR32EMTRZA2 MC XPP N11MGE1512CFkk_3V3 2*2G/320/BT/ 6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572TG-334G50Mnkk	EMEA	South Africa	LX.TW703.007	TM8572TG-334G50Mnkk EM W7PR32EMTRZA2 MC XPP N11MGE1512CFkk_3V3 2*2G/500_L/ BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572TG-334G64Mnkk	EMEA	South Africa	LX.TW703.008	TM8572TG-334G64Mnkk EM W7PR32EMTRZA2 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572TG-352G50Mnkk	TWN	GCTWN	LX.TW703.011	TM8572TG-352G50Mnkk W7PR32TRTW1 MC XPP N11MGE1512CFkk_3V3 1*2G/500_L/ BT/6L3.0/5R/bgn_FP_1.3C_MA_TC11
TM8572TG-354G50Mnkk	EMEA	Germany	LX.TW702.001	TM8572TG-354G50Mnkk W7HP64TRDE1 MC N11MGE1512CFkk_3V3 2*2G/500_L/ BT/6L3.0/5R/bgn_FP_1.3C_MA_DE61

TM8572TG-432G50Mnkk	TWN	GCTWN	LX.TW703.012	TM8572TG-432G50Mnkk W7PR32TRTW1 MC XPP N11MGE1512CFkk_3V3 1*2G/500_L/ BT/6L3.0/5R/bgn_FP_1.3C_MA_TC11
TM8572TG-434G25Mnkk	EMEA	South Africa	LX.TW703.004	TM8572TG-434G25Mnkk EM W7PR32EMTRZA2 MC XPP N11MGE1512CFkk_3V3 2*2G/250/BT/ 6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572TG-434G32Mnkk	EMEA	South Africa	LX.TW703.002	TM8572TG-434G32Mnkk EM W7PR32EMTRZA2 MC XPP N11MGE1512CFkk_3V3 2*2G/320/BT/ 6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572TG-434G50Mnkk	EMEA	South Africa	LX.TW703.003	TM8572TG-434G50Mnkk EM W7PR32EMTRZA2 MC XPP N11MGE1512CFkk_3V3 2*2G/500_L/ BT/6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572TG-434G64Mnkk	EMEA	South Africa	LX.TW703.009	TM8572TG-434G64Mnkk EM W7PR32EMTRZA2 MC XPP N11MGE1512CFkk_3V3 2*2G/640/BT/ 6L3.0/5R/bgn_FP_1.3C_MA_ES61
TM8572TG-524G32Mnkk	EMEA	Spain	LX.TW703.010	TM8572TG-524G32Mnkk W7PR32TRES1 MC XPP N11MGE1512CFkk_3V3 2*2G/320/ 6L3.0/5R/bgn_FP_1.3C_MA_ES52
TM8572TG-524G50Mnkk	EMEA	Germany	LX.TW703.014	TM8572TG-524G50Mnkk W7PR32TRDE1 MC XPP N11MGE1512CFkk_3V3 2*2G/500_L/ BT/6L3.0/5R/bgn_FP_1.3C_MA_DE62

Model	Country	Acer Part No	BOM Name	CPU	VGA Chip
TM8572TG-332G16Mnkk	GCTWN	S2.TWG03.001	TM8572TG_N11 MGE1512Ckk_3 V3	Ci3330M	N11MGE1
TM8572TG-332G16Mnkk	WW	S2.TWG03.002	TM8572TG_N11 MGE1512Ckk_3 V3	Ci3330M	N11MGE1
TM8572TG-332G50Mnkk	GCTWN	LX.TW703.001	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci3330M	N11MGE1
TM8572TG-334G25Mnkk	South Africa	LX.TW703.005	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci3330M	N11MGE1
TM8572TG-334G32Mnkk	South Africa	LX.TW703.006	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci3330M	N11MGE1
TM8572TG-334G50Mnkk	South Africa	LX.TW703.007	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci3330M	N11MGE1
TM8572TG-334G64Mnkk	South Africa	LX.TW703.008	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci3330M	N11MGE1
TM8572TG-352G50Mnkk	GCTWN	LX.TW703.011	TM8572TG_N11 MGE1512CFkk_ 3V3	Ci3350M	N11MGE1

TM8572TG-354G50Mnkk	Germany	LX.TW702.001	TM8572TG_N11 MGE1512CFkk_3V3	Ci3350M	N11MGE1
TM8572TG-432G50Mnkk	GCTWN	LX.TW703.012	TM8572TG_N11 MGE1512CFkk_3V3	Ci5430M	N11MGE1
TM8572TG-434G25Mnkk	South Africa	LX.TW703.004	TM8572TG_N11 MGE1512CFkk_3V3	Ci5430M	N11MGE1
TM8572TG-434G32Mnkk	South Africa	LX.TW703.002	TM8572TG_N11 MGE1512CFkk_3V3	Ci5430M	N11MGE1
TM8572TG-434G50Mnkk	South Africa	LX.TW703.003	TM8572TG_N11 MGE1512CFkk_3V3	Ci5430M	N11MGE1
TM8572TG-434G64Mnkk	South Africa	LX.TW703.009	TM8572TG_N11 MGE1512CFkk_3V3	Ci5430M	N11MGE1
TM8572TG-524G32Mnkk	Spain	LX.TW703.010	TM8572TG_N11 MGE1512CFkk_3V3	Ci5520M	N11MGE1
TM8572TG-524G50Mnkk	Germany	LX.TW703.014	TM8572TG_N11 MGE1512CFkk_3V3	Ci5520M	N11MGE1

Model	Country	Acer Part No	VRAM 1	Memory 1	Memory 2
TM8572TG-332G16Mnkk	GCTWN	S2.TWG03.001	512M-DDR3 (64*16*4)	SO2GBIII10	N
TM8572TG-332G16Mnkk	WW	S2.TWG03.002	512M-DDR3 (64*16*4)	SO2GBIII10	N
TM8572TG-332G50Mnkk	GCTWN	LX.TW703.001	512M-DDR3 (64*16*4)	SO2GBIII10	N
TM8572TG-334G25Mnkk	South Africa	LX.TW703.005	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572TG-334G32Mnkk	South Africa	LX.TW703.006	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572TG-334G50Mnkk	South Africa	LX.TW703.007	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572TG-334G64Mnkk	South Africa	LX.TW703.008	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10

TM8572TG-352G50Mnkk	GCTWN	LX.TW703.011	512M-DDR3 (64*16*4)	SO2GBIII10	N
TM8572TG-354G50Mnkk	Germany	LX.TW702.001	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572TG-432G50Mnkk	GCTWN	LX.TW703.012	512M-DDR3 (64*16*4)	SO2GBIII10	N
TM8572TG-434G25Mnkk	South Africa	LX.TW703.004	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572TG-434G32Mnkk	South Africa	LX.TW703.002	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572TG-434G50Mnkk	South Africa	LX.TW703.003	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572TG-434G64Mnkk	South Africa	LX.TW703.009	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572TG-524G32Mnkk	Spain	LX.TW703.010	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10
TM8572TG-524G50Mnkk	Germany	LX.TW703.014	512M-DDR3 (64*16*4)	SO2GBIII10	SO2GBIII10

Model	Country	Acer Part No	HDD 1(GB)	Wireless LAN1
TM8572TG-332G16Mnkk	GCTWN	S2.TWG03.001	N160GB5.4KS	3rd WiFi 2x2 BGN
TM8572TG-332G16Mnkk	WW	S2.TWG03.002	N160GB5.4KS	3rd WiFi 2x2 BGN
TM8572TG-332G50Mnkk	GCTWN	LX.TW703.001	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572TG-334G25Mnkk	South Africa	LX.TW703.005	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572TG-334G32Mnkk	South Africa	LX.TW703.006	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572TG-334G50Mnkk	South Africa	LX.TW703.007	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572TG-334G64Mnkk	South Africa	LX.TW703.008	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572TG-352G50Mnkk	GCTWN	LX.TW703.011	N500GB5.4KS	3rd WiFi 2x2 BGN

TM8572TG-354G50Mnkk	Germany	LX.TW702.001	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572TG-432G50Mnkk	GCTWN	LX.TW703.012	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572TG-434G25Mnkk	South Africa	LX.TW703.004	N250GB5.4KS	3rd WiFi 2x2 BGN
TM8572TG-434G32Mnkk	South Africa	LX.TW703.002	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572TG-434G50Mnkk	South Africa	LX.TW703.003	N500GB5.4KS	3rd WiFi 2x2 BGN
TM8572TG-434G64Mnkk	South Africa	LX.TW703.009	N640GB5.4KS	3rd WiFi 2x2 BGN
TM8572TG-524G32Mnkk	Spain	LX.TW703.010	N320GB5.4KS	3rd WiFi 2x2 BGN
TM8572TG-524G50Mnkk	Germany	LX.TW703.014	N500GB5.4KS	3rd WiFi 2x2 BGN

Acer TravelMate TM8572TZ

Model	RO	Country	Acer Part No	Description
TM8572TZ-P602G16Mnkk	WW	GCTWN	S2.TXQ03.001	TM8572TZ-P602G16Mnkk W7PR32TWW1 MC UMACFkk_3 2*1G/ 160/BT/6L3.0/5R/ bgn_FP_1.3C_MA_ES61
TM8572TZ-P602G16Mnkk	WW	WW	S2.TXQ03.002	TM8572TZ-P602G16Mnkk W7PR32TWW1 MC UMACFkk_3 2*1G/ 160/BT/6L3.0/5R/ bgn_FP_1.3C_MA_ES62

Model	Country	Acer Part No	BOM Name	CPU	VGA Chip
TM8572TZ-P602G16Mnkk	GCTWN	S2.TXQ03.001	TM8572TZ_UMA CFkk_3	PMDP600 0	UMA
TM8572TZ-P602G16Mnkk	WW	S2.TXQ03.002	TM8572TZ_UMA CFkk_3	PMDP600 0	UMA

Model	Country	Acer Part No	VRAM 1	Memory 1	Memory 2
TM8572TZ-P602G16Mnkk	GCTWN	S2.TXQ03.001	N	SO1GBIII10	SO1GBIII10
TM8572TZ-P602G16Mnkk	WW	S2.TXQ03.002	N	SO1GBIII10	SO1GBIII10

Model	Country	Acer Part No	HDD 1(GB)	Wireless LAN1
TM8572TZ-P602G16Mnkk	GCTWN	S2.TXQ03.001	N160GB5.4KS	3rd WiFi 2x2 BGN
TM8572TZ-P602G16Mnkk	WW	S2.TXQ03.002	N160GB5.4KS	3rd WiFi 2x2 BGN

Test Compatible Components

This computer's compatibility is tested and verified by Acer's internal testing department. All of its system functions are tested under Windows® 7 environment.

Refer to the following lists for components, adapter cards, and peripherals which have passed these tests. Regarding configuration, combination and test procedures, please refer to the Acer TravelMate 8572/8572G. Compatibility Test Report released by the Acer Mobile System Testing Department.

Vendor	Type	Description	Acer Part No
3G			
	EM770W-Rev1	EM770W-Rev1	LC.21300.049
Ericsson	F3307-900MHz	Ericsson F3307-900MHz	LC.21300.039
A cover			
	Black IMR	Black IMR	LZ.21000.044
	Red IMR	Red IMR	LZ.21000.056
	White IMR	White IMR	LZ.21000.040
Accessory			
	Jasper Bag	Jasper Bag	LZ.23800.013
Adapter			
DELTA	40W	Adapter DELTA 40W 19V 1.7x5.5x11 Black ADP-40 TH AA, LV5 wall-mounted, OBL LF	AP.04001.002
Audio Codec			
Realtek	ALC272X	Realtek Audio Codec ALC272X	LZ.21000.045
B cover			
	Mirror w/Camera	Mirror w/Camera	LZ.21000.009
Battery			
SANYO	3CELL2.2	Battery SANYO UM-2009G Li-Ion 3S1P SANYO 3 cell 2200mAh Main COMMON ID:UM09G31	BT.00303.020
SANYO	6CELL2.2	Battery SANYO UM-2009H Li-Ion 3S2P SANYO 6 cell 4400mAh Main COMMON ID:UM09H31	BT.00603.107
SANYO	6CELL2.2	Battery SANYO UM-2009H Li-Ion 3S2P SANYO 6 cell 4400mAh Main COMMON ID:UM09H31	BT.00603.107
SIMPLO	6CELL2.8	Battery SIMPLO UM-2009H Li-Ion 3S2P SAMSUNG 6 cell 5600mAh Main COMMON ID:UM09H70	BT.00607.117
Bluetooth			
Foxconn	BT 2.1	Foxconn Bluetooth BRM 2070 (T77H114.01)	BH.21100.007
Foxconn	BT 3.0	Foxconn Bluetooth ATH AR3011 (BT3.0)	BH.21100.009
Camera			
Chicony	1.3M	Chicony 1.3M CH9665AL(CNF9155)	AM.21400.065

Vendor	Type	Description	Acer Part No
Chicony	1.3M	Chicony 1.3M CH9665SN (CNF9157)	AM.21400.067
Liteon	1.3M	Liteon 1.3M LT9665AL (09P2SF119)	AM.21400.069
Liteon	1.3M	Liteon 1.3M LT6AASP(09P2BF127)	AM.21400.070
Suyin	1.3M	Suyin 1.3M SY9665AL	AM.21400.066
Suyin	1.3M	Suyin 1.3M SY9665SN	AM.21400.068
Card Reader			
	5 in 1-Build in	5 in 1-Build in MS, MS Pro, SD, SC, XD	CR.21500.013
CPU			
INTEL	ATMN455B	CPU Intel Atom N455 1.66G 512K DDR2/DDR3	KC.ANB01.455
INTEL	ATMN475B	CPU Intel Atom N475 1.83G 512K DDR2/DDR3	KC.ANB01.475
HDD			
HGST	N320GB5.4KS	HDD HGST 2.5" 5400rpm 320GB HTS545032B9A300 Panther B SATA LF F/W:C60F Disk imbalance criteria = 0.014g-cm	KH.32007.008
SAMSUNG	N160GB5.4KS	HDD SAMSUNG 2.5" 5400rpm 160GB M7E, 320G/P, HM161GI, Samsung SATA 8MB LF F/W:2AJ0002	KH.1600B.005
SAMSUNG	N250GB5.4KS	HDD SAMSUNG 2.5" 5400rpm 250GB M7E, HM251HI, 320G/P, Samsung SATA 8MB LF F/W:2AJ0002	KH.2500B.002
SEAGATE	N160GB5.4KS	HDD SEAGATE 2.5" 5400rpm 160GB ST9160314AS Wyatt SATA LF F/ W:0001SDM1	KH.16001.042
SEAGATE	N250GB5.4KS	HDD SEAGATE 2.5" 5400rpm 250GB ST9250315AS Wyatt SATA LF F/ W:0001SDM1	KH.25001.016
Keyboard			
ACER	NT0T_A10B	Keyboard ACER NT0T_A10B NT0T Internal 10 Standard Black Y2010 Acer Legend Texture	KB.I100A.059
LAN			
Atheros	AR8152L	Atheros AR8152L	NI.22400.050
LCD			
LPL	NLED10.1WSVGAG	LED LCD LPL 10.1" WSVGA Glare LP101WSA-TLN1 LF 200nit 16ms 400:1	LK.10108.003
MEM			
NONE	SO1GBIII10	Memory NONE REG-ECC DDRIII 1066 1GB phantom p/n LF	KN.1GB00.003
NONE	SO2GBIII10	Memory NONE SO-DIMM DDRIII 1066 2GB dummy 1066 LF	KN.2GB00.001
NB Chipset			
INTEL	NM10	NB Chipset Intel CS CG82NM10	KI.NM101.001
Software			
	McAfee	Antivirus application McAfee	SR.23900.001
VGA Chip			
None	UMA	UMA (Intel)	KI.23200.038

Vendor	Type	Description	Acer Part No
WiFi Antenna			
WNC	PIFA	PIFA	LZ.23500.006
Wiping Cloth			
Acer	Wiping Cloth	Acer Wiping Cloth for Y2010	LZ.23500.021
Wireless LAN			
Foxconn	3rd WiFi 1x1 BGN	Foxconn Wirelss LAN Broadcom 4313 1x1 BGN (HM) T77H194.00	NI.23600.076
Foxconn	3rd WiFi 1x1 BGN	Foxconn Wirelss LAN Atheros HB95 1x1 BGN (HM) T77H121.01	NI.23600.068
INTEL	INT6250H	WiMax Intel WLAN 622ANXHMWG Kilmer Peak 2x2 AGN	KI.KPH01.001
Liteon	3rd WiFi 1x1 BGN	Liteon Wireless LAN Atheros HB95 1x1 BGN (HM) WN6601AH	NI.23600.070
Liteon	3rd WiFi 1x1 BGN	Liteon Wireless LAN Reltek RTL8191SE 1x1 BGN (WN6605LH)	NI.23600.071
QMI	3rd WiFi 1x1 BGN	QMI Wireless LAN Atheros HB95 1x1 BGN(HM) EM305	NI.23600.069

Online Support Information

This section describes online technical support services available to help you repair your Acer Systems.

If you are a distributor, dealer, ASP or TPM, please refer your technical queries to your local Acer branch office. Acer Branch Offices and Regional Business Units may access our website. However some information sources will require a user i.d. and password. These can be obtained directly from Acer CSD Taiwan.

Acer's Website offers you convenient and valuable support resources whenever you need them.

In the Technical Information section you can download information on all of Acer's Notebook, Desktop and Server models including:

- Service guides for all models
- Bios updates
- Software utilities
- Spare parts lists
- TABs (Technical Announcement Bulletin)

For these purposes, we have included an Acrobat File to facilitate the problem-free downloading of our technical material.

Also contained on this website are:

- Detailed information on Acer's International Traveler's Warranty (ITW)
- Returned material authorization procedures
- An overview of all the support services we offer, accompanied by a list of telephone, fax and email contacts for all your technical queries.

We are always looking for ways to optimize and improve our services, so if you have any suggestions or comments, please do not hesitate to communicate these to us.

A

AFLASH Utility 37

B

Battery Pack 48, 138

BIOS

ROM type 19

vendor 19

Version 19

BIOS Utility 29–37

Advanced 32

Boot 33

Exit 36

Navigating 29

Onboard Device Configuration 33

Power 33

Save and Exit 36

Security 32

System Security 36

Board Layout

Top View 157

brightness

hotkeys 16

C

Camera Module 92, 99

Common Problems 140

computer

on indicator 12

D

DIMM Module 54, 132

display

hotkeys 16

E

EasyTouch Failure 150

External Module Disassembly

Flowchart 47

F

Features 1

Flash Utility 37

FRU (Field Replaceable Unit) List 161

H

Hard Disk Drive Module 51, 133

HDTV Switch Failure 151

Hibernation mode

hotkey 16

Hot Keys 14

I

Intermittent Problems 152

Internal Microphone Failure 145

Internal Speaker Failure 144

J

Jumper and Connector Locations 157

K

Keyboard Failure 143

L

LCD Bezel 89, 100

LCD Failure 143

LCD Module Disassembly

Flowchart 88

LCD Panel 93, 97

lower cover 50, 136

M

Main Unit Disassembly

Flowchart 60

Mainboard 79, 108

media access

on indicator 12

Memory Check 140

Model Definition 178

N

No Display Issue 141

O

ODD Failure 147
Online Support Information 313
optical drive module 58, 126

P

Panel
 Bottom 10
 left 7
Power On Failure 140

R

RTC Battery 81, 107

S

SD Card 49, 137

T

Test Compatible Components 309
Thermal Module 83, 104
Thermal Unit Failure 150
TouchPad Failure 144
Troubleshooting
 Built-in KB Failure 143
 EasyTouch Buttons 150
 HDTV Switch 151
 Internal Microphone 145
 Internal Speakers 144
 LCD Failure 143
 No Display 141
 ODD 147
 Other Failures 151
 Power On 140
 Thermal Unit 150
 TouchPad 144
 WLAN 150

U

Undetermined Problems 152
USB Board 72, 115
utility
 BIOS 29–37

W

Wireless Function Failure 150
WLAN Board 55