



Degassing Pit Lakes: Technical Issues and Lessons Learnt from the HERCO₂ Project in the Guadiana Open Pit (Herrerías Mine, SW Spain)

Javier Sánchez-España¹ · Iñaki Yusta² · Bertram Boehrer³

Received: 21 June 2019 / Accepted: 12 January 2020 / Published online: 17 January 2020
© Springer-Verlag GmbH Germany, part of Springer Nature 2020

Abstract

The unique case of carbon dioxide accumulation in the bottom layer of the acidic lake formed in the Guadiana open pit (Herrerías mine, SW Spain) led to exceptionally high dissolved gas pressures (ca. 5.0 bar at depths of 50–70 m). This CO₂ has formed by carbonate (calcite, dolomite) dissolution during decades of interaction of the acidic water with the rocks of the pit walls and associated mine tunnels. The elevated dissolved gas pressures were only comparable to those found in the volcanic crater lakes of Cameroon like Nyos and Monoun, which erupted in the 1980s and sadly triggered the loss of hundreds of human lives. This gas pressure was not far from the absolute (hydrostatic plus atmospheric) pressure limiting CO₂ solubility at depth, thus making this pit lake potentially dangerous for the possibility of a hypothetical limnic eruption. Following detailed field and experimental studies aimed at deciphering the source and accumulation patterns of CO₂ in the lake, a degassing project started in 2014, which followed an upscaling strategy with construction and installation of progressively bigger pipelines capable of extracting increasingly higher flow rates of CO₂-charged water from the deep part of the lake. As of May 2019, the degassing systems have successfully extracted most of the CO₂ originally present in the lake (i.e. $\approx 123,000 \text{ m}^3 \text{ CO}_2$), which has been discharged to the atmosphere in a controlled and safe way. The fountains became progressively smaller and finally stopped, due to the decreased gas pressure at depth. The larger pipes will serve as a regulating system in the future. This paper describes the main findings encountered during the degassing project, some relevant technical issues observed during the last 5 years (2014–2019), and lessons learnt from the Guadiana pit lake experience.

Keywords Acidic mine pit lakes · Dissolved carbon dioxide · Limnic eruption · Controlled degassing

Introduction

The discharge of untreated or poorly treated acid mine drainage (AMD) commonly causes environmental problems in nearby streams, lakes, reservoirs, aquifers, and soils, and strongly limits the usability of water resources (e.g. Geller et al. 2013; Nordstrom and Alpers 1999; Younger et al. 2002, and references therein). AMD has also been directly linked to health risks for local inhabitants (e.g. As contamination of groundwater or surface water). In the particular case of pit lakes, the combination of geochemical processes typical of AMD systems with physical features characteristic of lakes make them potentially hazardous for a number of reasons. The most obvious is the accumulation of reduced and potentially harmful gases like H₂S, CH₄, or NH₃, due to microbial activity at depth (e.g., Boehrer et al. 2017). Many pit lakes tend to be meromictic (permanently stratified) due to their high relative depth (Schultze et al. 2017), so these gasses

✉ Javier Sánchez-España
j.sanchez@igme.es

Iñaki Yusta
i.yusta@ehu.eus

Bertram Boehrer
bertram.boehrer@ufz.de

¹ Geochemistry and Sustainable Mining Unit, Department of Geological Resources, Spanish Geological Survey (IGME), Calera 1, Tres Cantos, 28760 Madrid, Spain

² Department of Mineralogy and Petrology, University of the Basque Country (UPV/EHU), Apdo. 644, 48080 Bilbao, Spain

³ Helmholtz Centre for Environmental Research-UFZ, Brueckstrasse 3a, 39114 Magdeburg, Germany

can accumulate for decades. The concern is that an eventual turnover could release these gases, causing chemical changes in surface water, with effects that would largely depend on environmental conditions and the use given to that particular pit lake (e.g. recreation, fishing, water supply).

Of particular concern, due to its potentially destructive capacity, is the hypothetical accumulation of large amounts of carbon dioxide (CO_2) in the deep part of these lakes. In a mine water-related conference held in 1997, Murphy (1997) was the first to raise the question of whether pit lakes could be susceptible to limnic eruptions like the so-called “killer” volcanic lakes Nyos and Monoun in Cameroon (e.g. Halbwachs et al. 2004; Kling et al. 1994, 2005; Tanyileke et al. 2019). 17 years later, a paper by Sánchez-España et al. (2014) documented, for the first time, the accumulation of very high levels of CO_2 in the deep part of an acidic pit lake in SW Spain. This CO_2 was seen to be chiefly due to the dissolution of carbonates (mainly calcite and dolomite) present in volcanic (basaltic) rocks in the mine site by the acidic water. 2 years later, another paper by Boehrer et al. (2016) reported the successful performance of pilot-scale degassing pipes installed in the pit lake, and quantified more precisely the concentration of different gases (CO_2 , N_2 , CH_4) and the resulting total dissolved gas pressure. The publication of this second paper, however, had a great impact on national and international media (e.g. Ansedé 2016), and provoked unjustified alarm among locals and regional authorities (Sánchez-España et al. 2018).

An agreement was signed between the Spanish Geological Survey (IGME) and the mining authorities of the Andalusian Government (Bureau of Mines, Division of Industry, Energy and Mining), with other research institutions (Helmholtz Centre for Environmental Research-UFZ, University of the Basque Country) participating, to start a degassing project to eliminate the possibility of a potentially dangerous gas outburst. This project, based on the encouraging results of pilot-scale trials, included the installation of large, permanent pipes in the pit lake and continuous monitoring of the dissolved gas pressure at depth. The HERCO₂ project started in September 2017 with the installation of the first pipe; a second pipe was installed in October 2018. The two pipes operated until March (Pipe 1) and May (Pipe 2) 2019, and successfully evacuated most of the CO_2 that had accumulated in this pit lake for decades. The design of these degassing pipes was inspired by technology developed and successfully applied in lakes Nyos and Monoun during the last 15 years (Halbwachs et al. 2004; Kling et al. 2005; Tanyileke et al. 2019).

In this paper, we report the main activities carried out during this project, as well as the most relevant findings, difficulties, peculiarities, and technical problems encountered during the course of the degassing operations. Our main goal is to share our experience with researchers, technicians,

managers, institutions, and companies with current interest and activity in flooded pits, so that what we have learned can be used if a similar case occurs in the future. In addition, it is our aim to highlight the importance of geochemical and limnological research and monitoring programs in abandoned flooded mine sites to avoid or minimize safety and health risks.

Site Description and Environmental Framework

The open pit of the Guadiana mine is part of a larger mine complex called Minas de Herrerías, in the province of Huelva (SW Spain) (Fig. 1). This complex included two open pits (Guadiana and Santa Bárbara) and two big shafts, which connected with the Guadiana pit by a framework of sub-horizontal mine galleries (Pinedo Vara 1963). The deeper galleries lie at a depth of 220 m below the topographic surface. The Guadiana mine was active from 1895 to 1990, and involved both underground and open pit mining. The orebody consisted of dominant pyrite with minor accompanying sphalerite, chalcopyrite, galena, and arsenopyrite.

This whole area surrounding the pits is covered by tailings and waste piles, and includes several dams of acidic, metal-rich water (Fig. 1). The Guadiana open pit started flooding around 1995, a few years after its abandonment. The resulting pit lake has been increasing in volume since then, and today presents a surface area of $\approx 20,000 \text{ m}^2$ and a maximum depth of 70 m in its central zone. The neighbouring Santa Bárbara pit lake is not connected with Guadiana, and presents a very different colour due to its much shallower depth (15 m) and very different composition (pH 4.7, with no dissolved ferric iron; López-Pamo et al. 2009).

The pit lake is now part of a mining aquifer that also includes a system of flooded galleries and shafts connected to the pit and the surrounding rock framework formed by altered and highly fractured volcanic rocks. The increased water level in recent years suggests that the pit is still being recharged by groundwater at depth, very likely through conduits, such as the main tunnels. From a hydrogeological perspective, the mine system seems to behave similar to karstic systems, with relatively fast circulation of water by such conduits and rock dissolution, which includes disseminated carbonates in several lithologies.

Methods

Depth profiling of physico-chemical parameters has been carried out every 3–5 months with a MS5 multi-parametric probe from Hydrolab (Hach) operated from a rubber boat.

Fig. 1 **a** Satellite view (Google Earth image of the Herrerías mining area, showing the location of Guadiana and Santa Bárbara flooded open pits, and nearby tailings and dams; **b** panoramic view of Guadiana acidic pit lake (aerial photograph taken from a drone in 2017)



All sensors were carefully calibrated on site with appropriate standards. The total dissolved gas (TDG) pressure was mostly measured with a Hach TDG sensor. This sensor consists of a transducer connected to a helical gas-permeable membrane. The sensor needs around 20 min to stabilize, which is roughly the time required to allow equilibrium of dissolved gas pressure on both sides of the membrane. Because of this long stabilization time, TDG measurements were usually conducted at selected reference depths (e.g. every 5–10 m). The measuring range of this sensor is 0–2100 mm Hg (0–2.76 bar). Because the TDG pressure in the deep part of Guadiana pit lake far exceeded the upper range limit, the TDG pressure had to be measured by other

methods, including gas sampling with specific gas-tight sampling bags (TecoBAG, Tesseraux, Germany) connected to a submersible pump (2013–2016; see Boehrer et al. 2016 or Horn et al. 2017 for a detailed explanation of the method; Fig. 2c), and direct TDG measurement with a custom made probe (Pro Oceanus, Bridgewater, Canada) able to measure gas pressures up to 18 bar and depths up to 500 m.

Water samples were also regularly collected at selected depths to follow the chemical evolution of the lake during the degassing operations. These water samples were taken with a Van Dorn limnologic bottle with 5 L volume (Fig. 2), immediately filtered (0.45 μ m) and acidified (HCl 1 M) on site, and preserved at 4 °C during transport to the lab.

Fig. 2 Field pictures taken in the Guadiana acidic pit lake during the period 2013–2014: **a** Panoramic view of the pit lake taken in December 2013, when it still showed a greenish colour in the water surface as a result of an upper layer with relatively low Fe(III) content and the presence of green algae; **b** detail of the Van Dorn sampling bottle after collecting CO₂-charged water from the deep part (60 m); **c**, **d** field work with simultaneous physico-chemical profiling with multiparametric probes and gas sampling in gas-tight sampling bags; **e–h** Sequence of pictures showing the installation and activation of the first pilot-scale pipes in October 2014



Ion concentrations in water samples were analyzed by atomic absorption spectrometry (AAS) and by inductively coupled plasma-atomic emission spectrometry (ICP-AES) using Varian SpectrAA 220 FS and Agilent 7500ce instruments, respectively. The analytical detection limits were usually below 1 µg/L for most trace elements.

Results and Discussion

Preliminary Research and First Degassing Prototypes

Table 1 provides a brief review of some relevant milestones and important dates concerning research and initiatives

Table 1 Chronological sequence of some relevant measures and milestones achieved in Guadiana pit lake for the period 2008–2019

Date	Action	Comments
March 2008	First visit to the pit lake, water sampling and chemical results	Observation of elevated gas pressure and abundant bubbles in deep water sampled from monimolimnion (40 m)
June 2010	First full-scale survey with bathymetric studies, nutrient and DIC measurement	First results on DIC concentration, which yielded elevated values exceeding 3200 mg/L CO ₂ ; impossible to obtain accurate depth readings and intact sediment cores due to elevated gas pressure at depth
March 2012	First isotopic analyses of pit lake water and surrounding rocks and plants	Results strongly suggestive of DIC being derived by carbonate dissolution
Sept 2013	Rock dissolution experiments conducted with different rock types from Guadiana mine	Chemical/mineralogical analyses indicate abundant presence of carbonates in spilitic rocks and experimental results clearly show a fast carbonate dissolution at pH < 4.5–5.0
Dec 2013	First accurate measurement of gas pressure and concentration at depth with gas-sampling bags	Precise quantification of CO ₂ concentration, giving values approaching 5000 mg/L CO ₂ and partial pressure (<i>p</i> CO ₂) of 3.6 bars
March 2014	First comprehensive study published and regional authorities contacted	The scientific community is aware of a new case of a gas-charged lake with potential safety risk
April 2014	First pilot-scale pipe installed in the pit lake	Thin hose (19 mm diameter, 60 m long) installed, but flow initiation failed due to insufficient pump power
Oct 2014	Second pilot-scale installed in the pit lake	A second pipe, 32 mm in diameter and 61 m is installed; both pipes are set in operation with a stronger pump
April 2016	Second study reporting results of 2 years of pilot-scale pipes performance is published	Big impact in media provokes alarm in local population; contacts and negotiations with regional authorities
June 2017	Contract signed between Spanish Geological Survey and the Bureau of Mines of the Andalusian Government	Installation of a larger pipe (61 m long and 50 mm diameter) in pit lake center, giving flow rate of 50 L/min
Oct 2018	Installation of a second pipe	A new pipe (65 m long and 63 mm diameter) installed in June 2018, starts operating at a flow rate of 60 L/min
Nov 2018	Removal of reductions in both pipes	Reducer hose fittings at the discharge points of both pipes removed to increase flow rate. The combined discharge increases to 113 L/min
May 2019	Last monitoring campaign for evaluation of degassing program	Both pipes gradually decrease in height and flow rate due to diminished gas pressure at depth. Pipe 1 stops working Feb 2019; Pipe 2 is exhausted May 2019

conducted in the Guadiana pit lake during the last decade. In the first visits and preliminary investigations conducted between 2008 and 2010, several observations suggested the presence of an extreme concentration of dissolved gas in the deep part of the pit. First, the sampling bottle reached the boat with a very high pressure and intensely sparkling water, which often provoked the opening of regulating valves (Fig. 2b). Second, sediment cores taken from the bottom appeared totally mixed and homogenized due to degassing during the uplift. Third, bathymetric surveys with double-beam ecosounders gave inaccurate readings in the deepest part of the lake, such as apparent depths of 40 m at zones where the depth had been manually measured at ≈ 60 m. Physico-chemical profiles indicated the absence of gases like O₂ or H₂S, even at trace amounts. The CO₂ content was measured by spectrophotometry, which gave maximum concentrations exceeding 3200 mg/L CO₂ at depths of 45 m. However, no reliable measurements could be made in the deeper part due to intense degassing during sample handling (Sánchez-España et al. 2014). The first

precise measurement of CO₂ concentration and resulting gas pressure for this part was conducted in December 2013 with the help of gas-tight sampling bags followed by gas volume measurement and chemical analyses by gas chromatography (Sánchez-España et al. 2014; Fig. 2c, d). The obtained values ([CO₂] = 5000 mg/L, *p*CO₂ = 3.6 bar) strongly recommended more careful investigations and the implementation of some correcting measure to reduce any safety risk in the area. The major threat considered at that moment was that some external factor (e.g. a landslide or small-scale earthquake) could trigger a limnic eruption. To test the feasibility of extracting the gas-charged water from the deep part of the lake by degassing pipes, two different pilot-scale pipes were installed in 2014 (Boehrer et al. 2016; Table 1; Fig. 2e–h). These trials worked successfully for two (prototype 1) to four (prototype 2) years.

The flow rates of these trials, however, were very low, with discharge rates between 2 L/min (prototype 1) and 10 L/min (prototype 2). A simple calculation using those flow rates and the estimated volume of gas-charged deep water to

be evacuated (around 114,000 m³, considering only depths below 45 m, where gas pressures increased dramatically; Boehrer et al. 2016) indicated a required degassing time of ≈ 18 years. This obviously indicated an urgent need to upscaling the project by installing a larger pipe, which could provide much higher flow rates and reduce the duration of the degassing operations. A new project was started in 2017 under contract with the Bureau of Mines of the Andalusian Government (Table 1; Figs. 3, 4).


Installation of Permanent Degassing Pipes and Associated Protective Measures

A new pipe (Pipe 1) installed in September 2017 with a PVC hose (10 atm) of 50 mm diameter and 61 m in length yielded a 3 m high fountain with flow rate of 50 L/min (Fig. 4c). Along with the second prototype, which was still active at that time, this gave a total discharge of 60 L/min (Fig. 3a). Although this was a fivefold flow augmentation relative to the previous pipes, the evolution of gas pressures at depth was not as fast as expected. For this reason, an additional,

Fig. 3 Field pictures taken in the Guadiana acidic pit lake during the period 2017–2018: **a** activation of degassing Pipe 1; **b** installation of degassing Pipe 2; **c** Conventional high-speed motor pump initially used for pumping of degassing Pipe 2, which proved to be inefficient to pump the gas-charged deep water; **d, e** membrane pumps finally used to evacuate the gas-charged water from within the hoses and put degassing pipes 1 and 2 into operation; **f** detail of mine tunnel and big fracture in the pit walls at the northern part of the open pit; **g** remnants of drill cores found in the pit with abundant carbonate (calcite, dolomite) present in fractures and voids of the volcanic rocks; **h, i** warning signboards installed in the pit fence after the activation of Pipe 1



Fig. 4 Sequence of pictures showing the different pipes installed in Guadiana pit lake in chronological order: **a** Prototype 1; **b** Prototype 2; **c** Pipe 1; **d** Pipe 2; **e** Pipes 1 and 2 working simultaneously. The hose diameter, height of the resulting fountain, initial flow rate, and date of installation are indicated

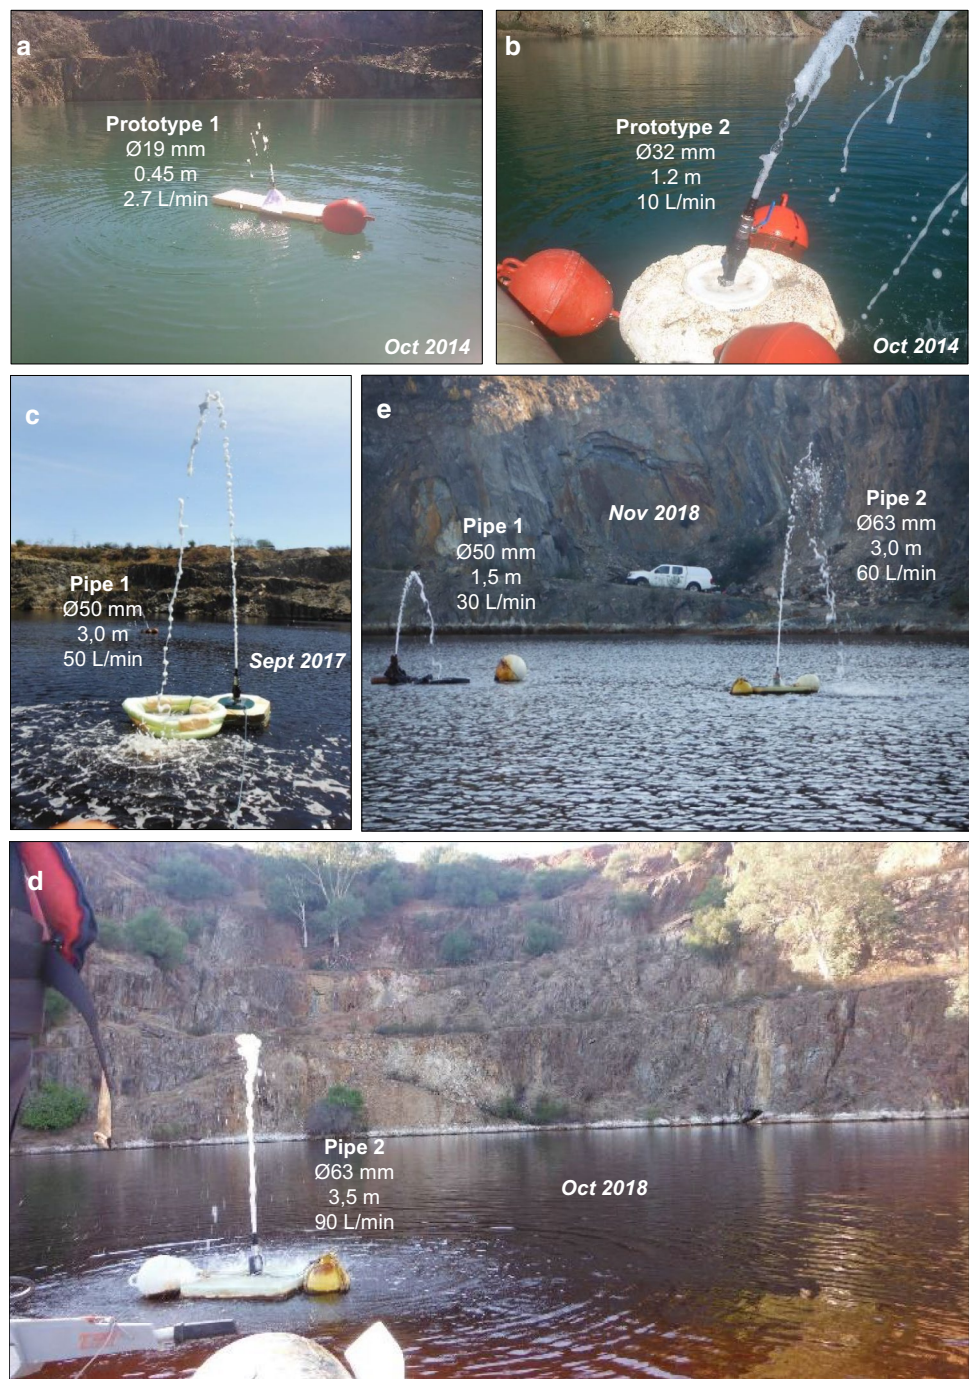

larger pipe (Pipe 2, 63 mm diameter and 65.5 m in length) was installed in June 2017 (Fig. 3b).

This new pipe could not be activated at first, since conventional motor pumps (Fig. 3c) could not provide stable flow rates and no fountain formed during pumping. Subsequent trials in October 2018 with membrane pumps (much more appropriate for gas-rich water) activated this second pipe, creating a fountain 3.5 m high and a discharge of 60 L/min. The total discharge of both pipes amounted to ≈ 90 L/min (Fig. 4), ensuring that lake degassing could proceed

in a reasonable time period. However, both pipes included flow reducers at the discharge points, which increased the height of the fountain and dispersion of the CO_2 into the atmosphere, but decreased the flow rate. Therefore, a month later, these flow reducers were removed and the combined discharge increased again, to 113 L/min. The main features of all of these pipes during 2014–2018 are summarized in Table 2 and illustrated in Fig. 4.

Coinciding with the installation of these new pipes, some other works were also accomplished, including inspection

Table 2 Summary of degassing pipes installed in the Guadiana acidic pit lake during the period 2014–2019, with some relevant features indicated

Pipe	Date installed	External diameter (mm)	Internal diameter (mm)	Hose length (m)	Fountain height (m)	Flow rate (L/min)	Operation time (months)
Prototype 1	April 2014	25	19	60	0.35	2	18
Prototype 2	Oct 2014	40	32	61	1.4	10	48
Pipe 1	Sept 2017	50	42	61	3.0	50	17
Pipe 2	June 2018	63	55	65.5	3.5	60	8

of fractures and deteriorated platforms in the pit (Fig. 3f), collection and investigation of drill core remnants from the mine site to assess local geology and mineralogy (Fig. 3g), and installation of warning signboards (Fig. 3h, i).

Overall Performance of the Degassing Pipes

Figure 5 illustrates the effects of the degassing on dissolved gas pressure in the pit lake during the last 5 years. TDG profiles taken in different periods from December 2013 to May 2019 with the Hach membrane sensor (hence limited by the 2.7 bar sensor limit) are displayed in Fig. 5a, while those obtained by the gas-sampling method or by the custom-made probe are given in Fig. 5b. In the latter, the horizontal scale has been enlarged to display the absolute pressure as a reference.

In both plots, the temporal evolution of TDG clearly shows a continuous decrease of dissolved gas pressure due to degassing. Although the decrease in TDG has occurred in the whole water column below 20 m, the drop in gas pressure has been especially important at depths below 50 m (Figs. 5 and 6a). This point is particularly important, as it has decreased gas pressures in the deep water from close to 5 bars in 2013, which was not too far from the absolute pressure (hydrostatic plus atmospheric) limiting gas solubility, to values of 1.0–1.8 bars at present, which can be considered safe (Fig. 5b).

The continual decrease of the fountains' heights and flow rates provide indirect evidence of this drop of dissolved gas pressure at depth during the degassing period. As an example, Pipe 1 started working in September 2017 with a fountain height of 3 m and a flow rate of 50 L/min; then it gradually decreased over the next 17 months of operation (e.g. 1.5 m and 30 L/s in November 2018; Fig. 4c–e) until it finally stopped in February 2019. This was due to the decreasing gas pressure at the extraction depth (60–61 m), which delivered the driving force of the ascending vertical flow of gas-charged water through the pipe.

Considering the respective flow rates and times of operation of the four pipes between October 2014 and May 2019, the total amount of gas-charged deep water pumped to the surface has been estimated at $\approx 74,000 \text{ m}^3$. This calculation

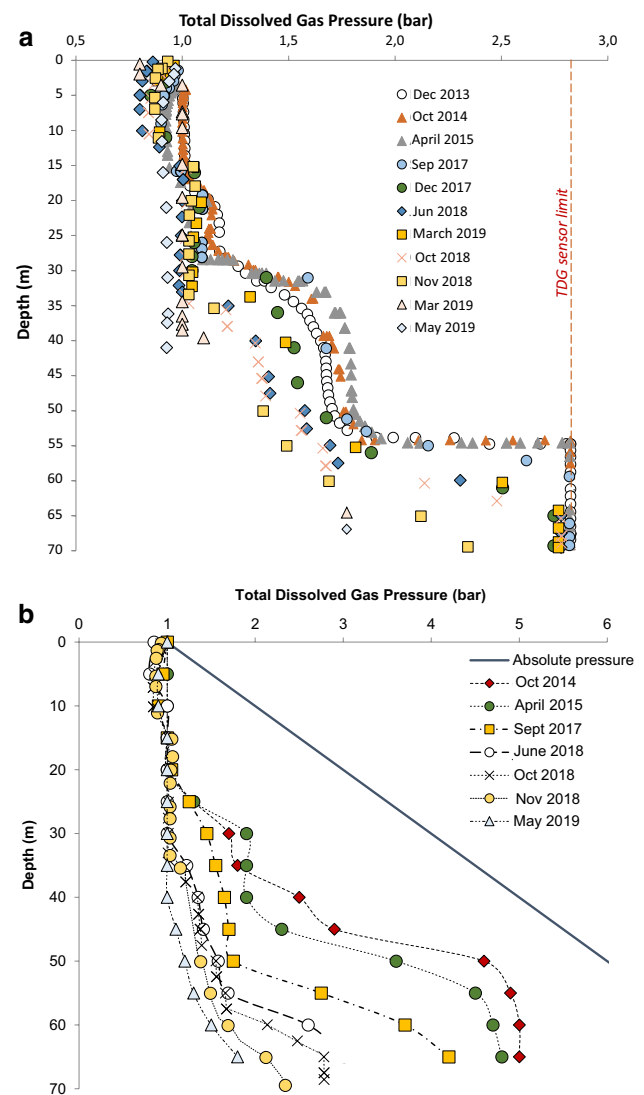


Fig. 5 Vertical evolution of total dissolved gas (TDG) pressure in Guadiana pit lake: **a** TDG profiles obtained directly with a TDG Hach sensor; **b** TDG profiles calculated from gas volume measurements (October 2014 and April 2015), Pro Oceanus mini-TDG probe (September 2017) and TDG Hach sensor (all other dates)

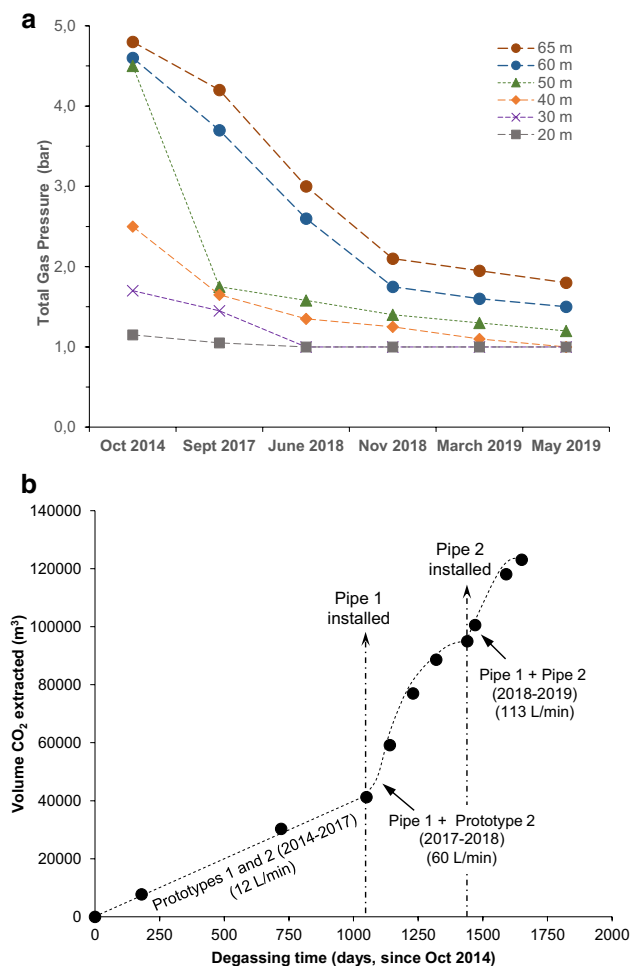


Fig. 6 **a** Temporal evolution of total dissolved gas (TDG) pressure (in bars) at different depths of Guadiana pit lake during the degassing period from October 2014 to May 2019; **b** volume of carbon dioxide (CO₂, in m³) extracted during the degassing period

accounts for the progressive decrease in flow rate (based on observations during systematic visits) of all pipes. This volume of water roughly corresponds to the volume of water between depths of 45 m (the depth at which TDG pressure increased exponentially in 2013) and 60–61 m (suction depths of the prototypes and Pipe 1), $\approx 80,000$ m³. Based on this calculation, it can be assumed that most of the CO₂-rich deep water has already been evacuated to the surface and released most of the dissolved CO₂ to the open atmosphere in a gradual and safe way.

The total amount of CO₂ released to the atmosphere during this period would approach 123,000 m³ (Fig. 6b). This calculation has already considered the respective concentrations and pressures measured in the deep water and their variation with time, as well as the resulting theoretical volumes at the surface (1 bar). This approximation exceeds that initially estimated in a previous paper (80,000 m³ of pure CO₂ accumulated below depths of 45 m; Boehrer et al. 2016). However, the previous


estimation was based on depth profiles conducted in 2013 and 2014, when the pit lake had a surface area of 18,000 m², a maximum depth of 65 m, and a volume of $\approx 590,000$ m³. In contrast, due to the continuous input of groundwater recharge from adjacent mine galleries and the mine aquifer, the pit lake now has a surface area of $\approx 20,000$ m², a maximum depth of 70 m, and a volume of $\approx 690,000$ m³. Therefore, it can be concluded that the degassing pipes have been extracting CO₂ not only from the deep water originally contained in the pit lake at the time of the first studies, but also from nearby groundwater feeding the pit lake, which very likely also contains large amounts of CO₂. If abruptly released to the atmosphere in a hypothetical eruption, this amount of CO₂ could have formed a potentially lethal cloud of pure CO₂ ≈ 6 m thick immediately above the pit lake surface. The stability and physical behaviour of this hypothetical cloud would have been strongly dependent on physical processes such as diffusive or convective transport, wind currents, air temperature, etc. The high vertical walls existing in the pit above the lake surface would have probably favoured the retention of the CO₂ cloud within the pit, though the consequences of this gas outburst would have been largely unpredictable.

Figure 6b clearly shows that the rate of degassing greatly increased with the installation of the Pipe 1, and again with the installation of Pipe 2. Thus, Pipe 1 was able to extract 60,000 m³ CO₂ in only 500 days, and 28,000 m³ CO₂ were extracted between Pipe 1 and Pipe 2 in 260 days, while the two prototype pipes removed 40,000 m³ in 1000 days (Fig. 6b). Together, these pipes accomplished the objectives raised by the authorities and have made the pit lake relatively safe, as far as gas pressure is concerned.

Effects of Degassing on Pit Lake Stratification

The effects of the degassing actuation on pit lake stratification can be observed in the vertical profiles of Fig. 7, which show the temporal evolution of temperature, specific conductance, pH, and oxidation–reduction potential (ORP). All these plots reveal that the continuous self-sustained pumping of deep water to the surface has gradually thickened the mixolimnion and deepened the chemocline, which moved from a depth of 10 m in October 2014 to 41 m at present (Fig. 7a–d). The chemical modifications of the pit lake during the degassing period have been really important, as expected from the extremely high concentrations of dissolved sulphate, ferrous iron, and many other metals (Zn, Mn, Mg, Co, Ni, etc.) contained in the deep water, which far exceeded those of the surface (Sánchez-España et al. 2014). The whole mixolimnion has experienced a gradual acidification (from \approx pH 3.0 in 2014 to pH values between 2.0 and 2.5 at present; Fig. 7c) due to the continuous oxidation

Fig. 7 Depth profiles of selected physico-chemical parameters taken in the Guadiana acidic pit lake in the period from December 2013 to May 2019, showing the temporal evolution of the lake stratification during the degassing activities: **a** Temperature (T , in $^{\circ}\text{C}$); **b** specific conductance (in $\mu\text{S}/\text{cm}$); **c** pH; **d** Oxidation–reduction potential (ORP, in mV)

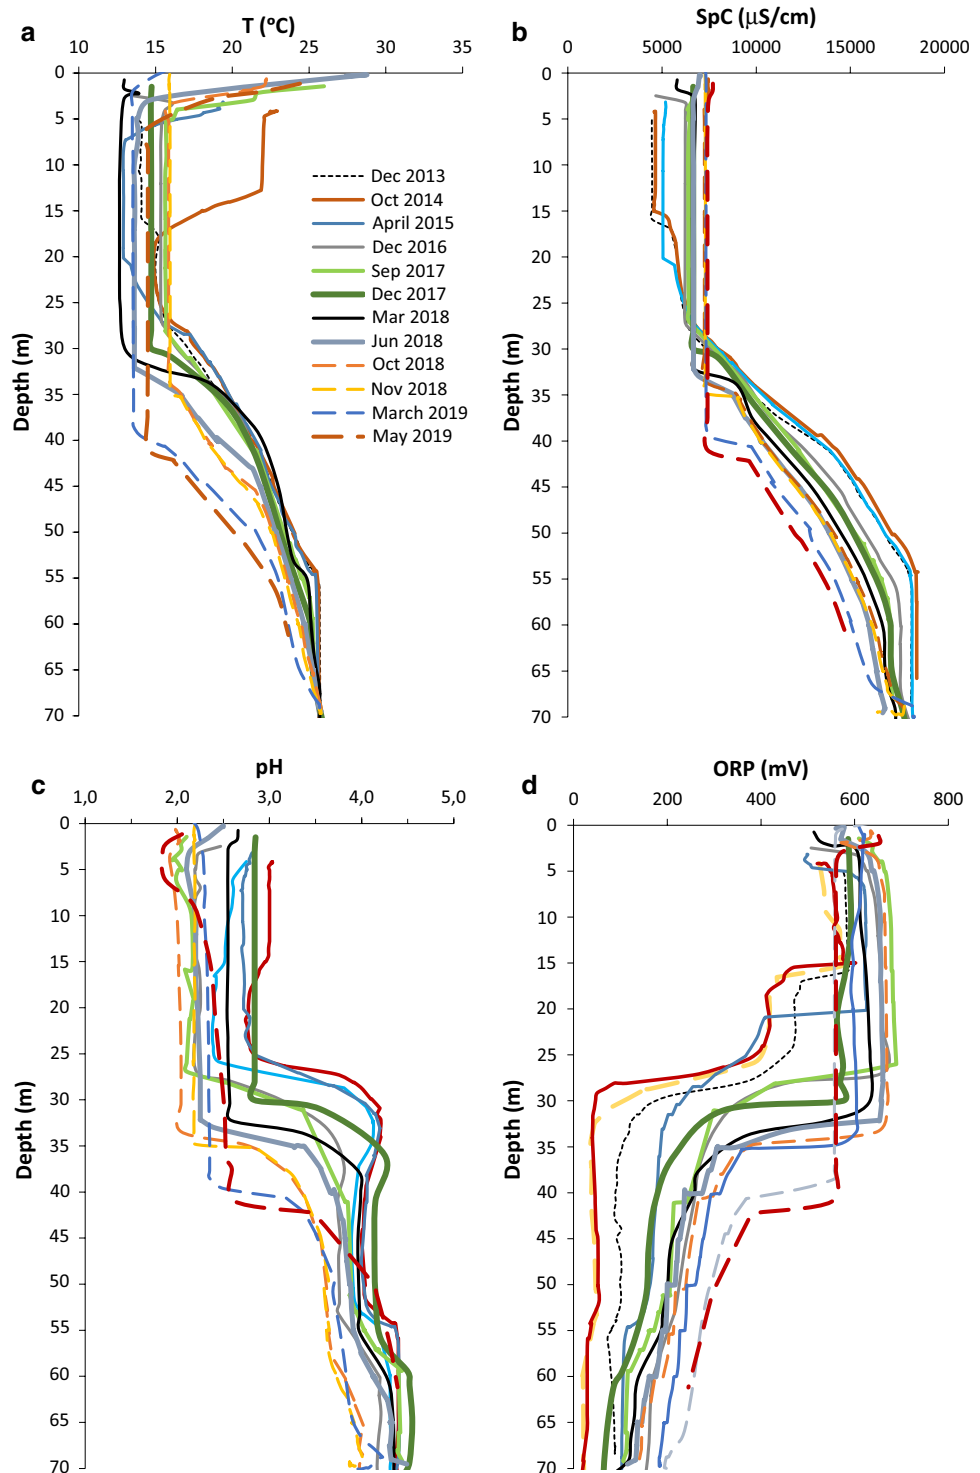

of Fe(II) and subsequent precipitation of Fe(III), mostly as schwertmannite with a minor amount of jarosite (Sánchez-España et al. 2016).

In the same way, dissolved solids (as indicated by specific conductance) also continuously increased at the lake surface (4600 $\mu\text{S}/\text{cm}$ in 2014 vs. 7400 $\mu\text{S}/\text{cm}$ in 2019; Fig. 7b), and ORP has evolved in certain layers (between depths of 30 and

50 m) from 50 mV in 2014 to 400–550 mV in 2019 (Fig. 7c). The physico-chemical changes at depth have also been drastic; for example, water temperatures between 40 and 60 m have decreased by up to 9 $^{\circ}\text{C}$ (Fig. 7a) and specific conductance has dropped by 25–30% to even 50% at 40 m (Fig. 7b).

Furthermore, self-sustained degassing through the pipes has continuously removed water from the deepest layer,

moving shallower waters of lower density progressively to greater depths. As a final result, the thickness of the CO_2 -rich bottom layer shrank from 25 m in 2014 to 4–5 m above the pit lake bottom at present (Fig. 8a–d).

In the schematic representation given in Fig. 8a–d, we have not included the rest of the “mining aquifer” composed of galleries and shafts connected to the pit (Fig. 8e). However, it is evident from the aforementioned observations that CO_2 production is not restricted to carbonate dissolution in the pit walls, but also occurs in the rest of the mine complex and wherever carbonate minerals exist in contact with acidic water. Thus, a portion of the CO_2 -rich water extracted from the deep part of the lake

would actually correspond to groundwater entering the pit lake from some of the tunnels (Fig. 8e). In this sense, some uncertainty exists about the possible evolution of gas pressures at depth in this mine site now that the current gas pressure is not sufficient to sustain stable vertical ascending flow along the pipes.

Effects of Deep-Water Degassing on Pit Lake Chemistry

Pumping deep water to the lake surface has impacted water quality negatively, especially regarding the upper part of the lake. This deterioration became evident soon after degassing

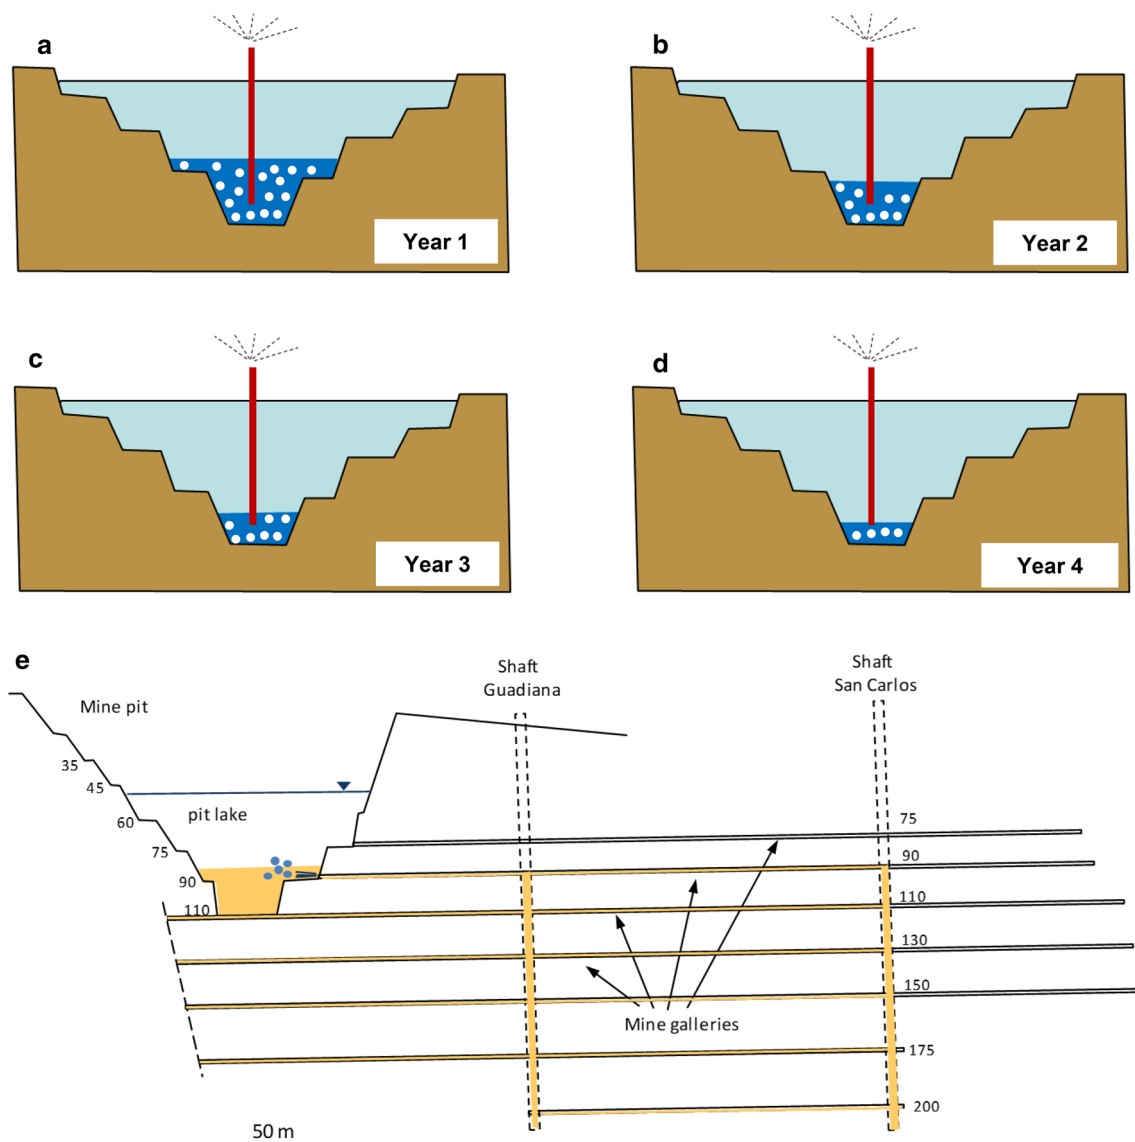


Fig. 8 a–d Schematic diagram showing the evolution of Guadiana pit lake during the last 4 years as a result of controlled degassing; e Idealized cross-section of the whole Guadiana mine complex, including the open pit as well as the set of sub-horizontal mine galleries

and vertical shafts which are hydraulically connected with the pit; numbers next to the mine pit and galleries refer to depths (in meters) below the topographic surface (modified from Pinedo Vara 1963)


Fig. 9 Sequence of pictures showing the effects of the continuous pumping of gas-charged deep water to the pit lake surface: **a** aspect of the pit lake in April 2014, before the start of degassing; **b** aspect of the pit lake in April 2015, after 6 months of deep water pumping by two pilot-scale pipes; **c, d** aspect of the degassing pipes (Prototypes 1 and 2) after 2 years of operation (note massive formation of mineral coatings on the tap, foam platform and buoys); **e** panoramic view of the pit lake in June 2018 (note deep red colour resulting from high contents of dissolved Fe[III])



activities began (Fig. 9). The pit lake changed colour from greenish to deep red in a few months, due to fast Fe(II) oxidation and massive schwertmannite precipitation (Fig. 9a, b). The upper part of the pipes was also densely covered by thick mineral coatings containing a mixture of schwertmannite, jarosite, goethite, hydrobasaluminite (resulting from Al precipitation), and gypsum (Fig. 9c, d). The present aspect of the pit lake denotes the current concentration of dissolved ferric iron (350 mg/L Fe[III]) and the abundance of ferric colloids in the lake surface (Fig. 9e).

The chemical effects of deep water pumping are also reflected in the evolution of dissolved oxygen in the upper part of the lake (Fig. 10a), which has evolved from concentrations of 7–8 mg/L O₂, representing \approx 100% saturation at its corresponding temperature (usually, 13–25 °C; Fig. 7a) to very low or negligible, depending on the depth considered. This marked drop has resulted from the high chemical oxygen demand of dissolved ferrous iron oxidation, which takes place at the lake surface once the reduced deep water has discharged and mixed in the mixolimnion.

Fig. 10 **a** Depth profiles of dissolved oxygen (DO, as percent saturation) taken in Guadiana pit lake in the period from December 2013 to May 2019; **c, d** Depth profiles of metal concentration (all in mg/L) from June 2010 to Dec 2017: total iron (Fe_{tot} , **b**), zinc (Zn, **c**), manganese (Mn, **d**)

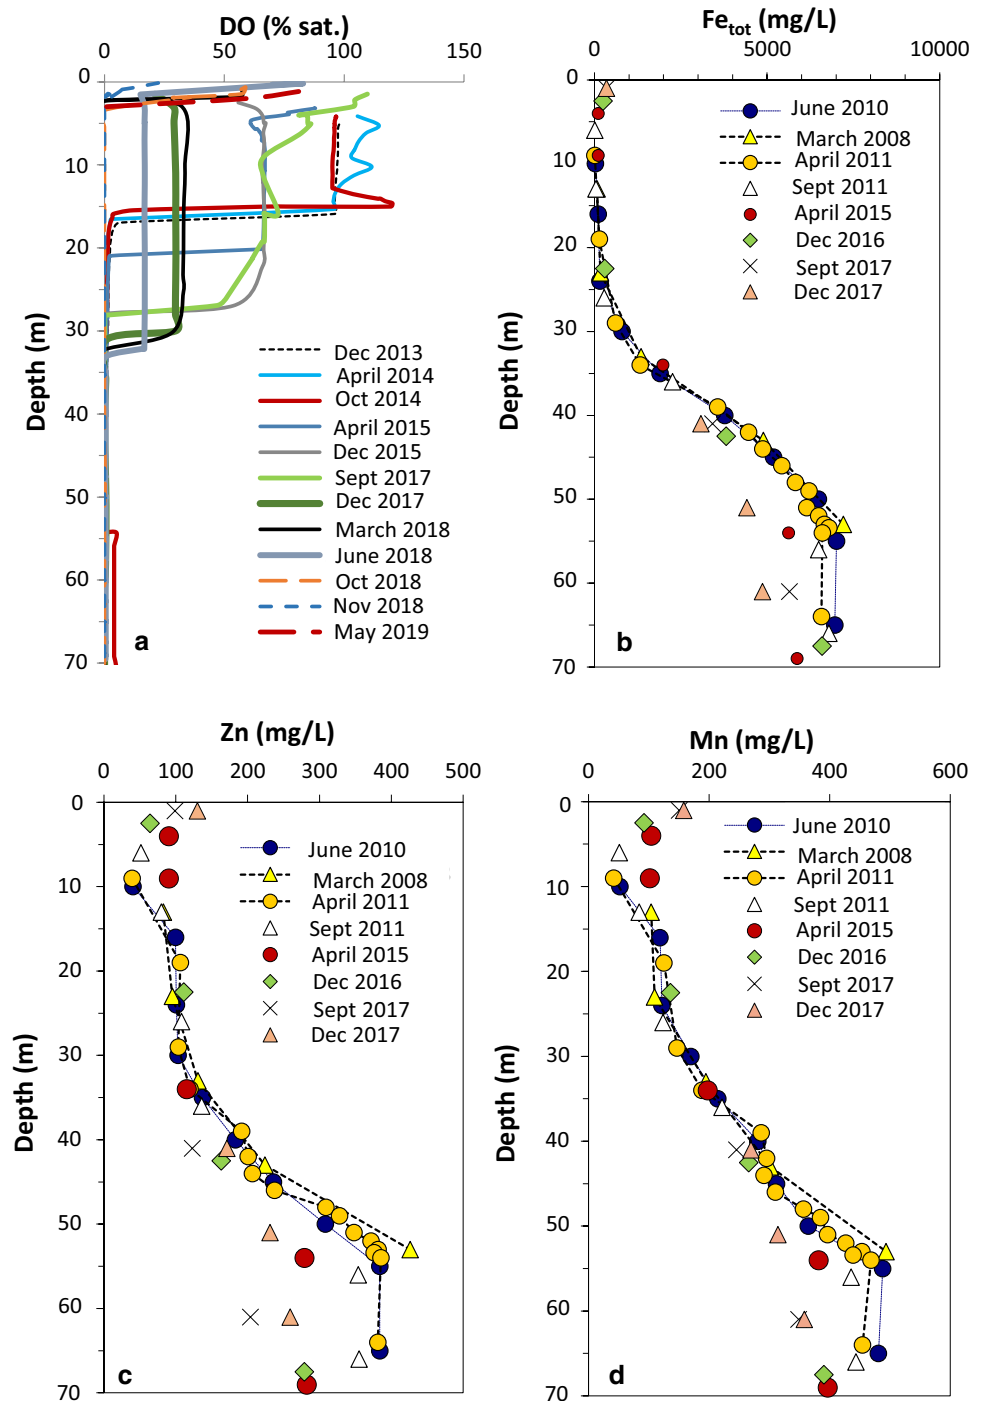

The vertical profiles for metals like Fe, Zn, and Mn (Fig. 10b–d) also illustrate this contrasting evolution between the upper mixolimnion, where metal concentrations have increased significantly due to the introduction of metal-rich deep water to the surface and the deep monimolimnion, where metal concentrations have progressively decreased. Metal increase in the mixolimnion was also evident in the suspended particulate matter retained in filters, which was

denser and showed a reddish colour with increased Fe and S content (not shown).

Technical Issues Regarding TDG Measurement

An evident conclusion concerning total gas pressure measurements (see Fig. 5a) is that the Hach TDG sensor was designed to survey fish ponds and water treatment plants, but

not extremely gas-charged water bodies like the Guadiana pit lake. It required a major effort to convince a manufacturer to build a total pressure sensor for much higher gas pressures and a much greater deployment depth. We appreciate the generous support by Pro Oceanus in providing a total gas pressure sensor Mini-TDG with a shorter response time for the conditions in Lake Kivu (Boehrer et al. 2019). This sensor was also used for direct gas pressure measurements in the Guadiana pit lake in 2017 (see Fig. 11a).

Given the very long stabilization time of the Hach TDG sensor, a different approach had to be used sometimes. This approach consisted of limiting the measuring time at each point to 20 min (as indicated by the company), and then

plotting the data set to extrapolate the data until they asymptotically approached certain values (Fig. 11b).

Dissolved Gas Pressure Monitoring in Other Pit Lakes as a Predictive Tool

Considering the alarm generated by Guadiana pit lake, we decided to investigate some other pit lakes in the area and in other mining districts to check if a similar situation could be found in other flooded pits. We initially selected pit lakes that met the requisites needed to accumulate CO_2 at depth, namely: (1) high depth-to-surface ratio ensuring meromixis and thus avoiding lake turnover, (2) local geology containing carbonates susceptible to acid dissolution, (3) low pH values (i.e. below 4–5) forcing all dissolved inorganic carbon to be present as CO_2 (i.e. without any bicarbonate or carbonate ions), and (4) long time period after mine closure and flooding, so that CO_2 could have accumulated for some decades. The TDG profiles obtained in some of these pit lakes (e.g. La Zarza and Filón Centro in the Iberian Pyrite Belt in SW Spain, or Brunita in the La Unión mine district in SE Spain) and in some other previously studied pit lakes (e.g. Cueva de la Mora or San Telmo; Sánchez-España et al. 2013; Schultze et al. 2017) are displayed in Fig. 12.

As can be deduced from the TDG profiles of Fig. 12, the Guadiana pit lake case seems to be quite unique. None of the other pit lakes has developed even a remotely similar situation with regard to elevated dissolved CO_2 pressures. Only Cueva de la Mora, which displayed peak TDG values of 2.3 bar near the pit lake bottom at depths of 35–40 m (Fig. 12). The acidic pit lake of Brunita, in the La Unión mining district, has developed TDG pressures of ≈ 1.5 bar above the sediments at 22 m depth, resulting mostly from carbonate (siderite, dolomite) dissolution and the consequent release of CO_2 . Most other pit lakes (La Zarza, Filón Centro, San Telmo) showed low TDG values at depth, which were all very far from the absolute value, and apparently do not represent a safety risk at this moment. It would be advisable, however, to follow the temporal evolution of TDG values and CO_2 concentration in pit lakes like Cueva de la Mora or Brunita, since such data would allow rates of CO_2 accumulation to be calculated in these mine sites and predict possibly dangerous scenarios in the future.

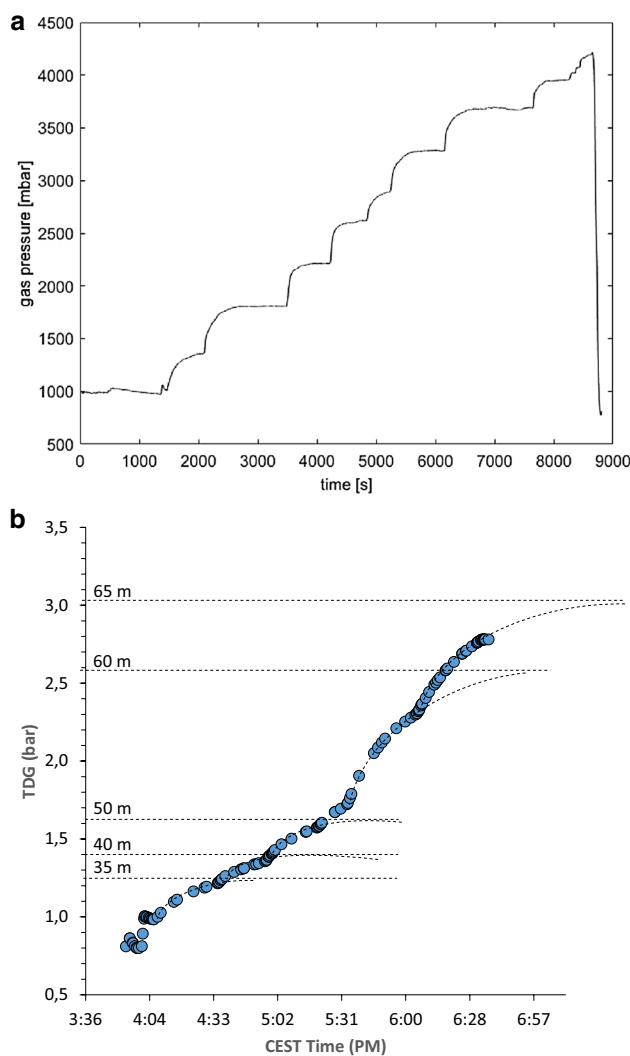


Fig. 11 Plots showing the stabilization time of total dissolved gas pressure in two different moments and with two different measuring instruments: **a** Profile conducted in September 2017 with a Mini-TDG (Pro Oceanus, Bridgewater, Oceanus); **b** profile conducted in June 2018 with a TDG sensor from Hach connected to a Hydrolab MS5 multiparametric probe

General Conclusions and Lessons Learnt

Below we provide some recommendations and considerations arising from the HERCO₂ project in the Guadiana pit lake with respect to safety, mine water-related research, and other technical issues.

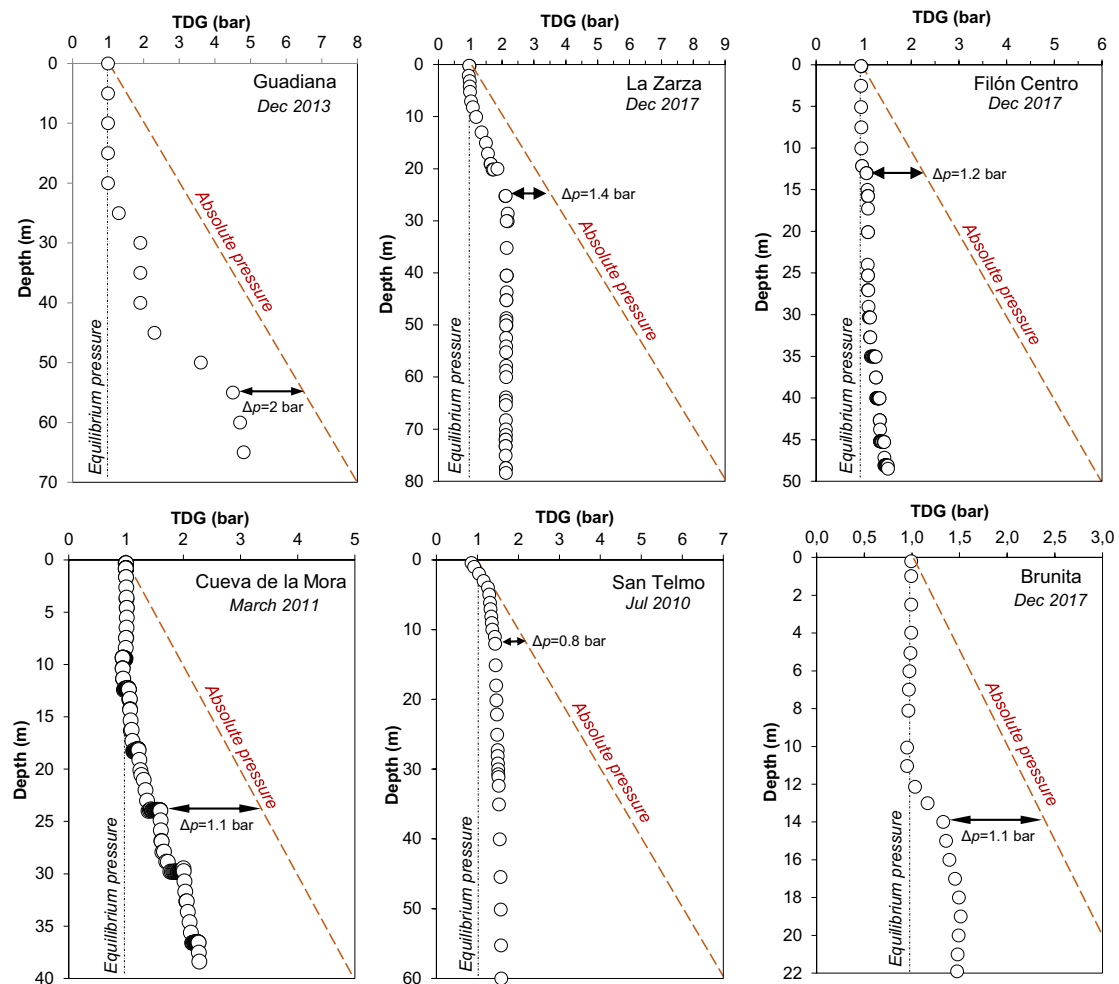


Fig. 12 Depth profiles of total dissolved gas [TDG] pressure in some Spanish pit lakes in the Iberian Pyrite Belt (Guadiana, La Zarza, Filón Centro, Cueva de la Mora, San Telmo) and La Unión mines (Brunita). In all cases, we indicate the date the profiles were taken,

the atmospheric equilibrium pressure ($=1$ bar), the absolute pressure (for reference), and the minimum difference (Δp) between the TDG pressure and the absolute pressure at that depth

Civil Responsibilities in Abandoned Flooded Pits

An evident conclusion from the Guadiana pit lake case is that leaving flooded mine sites unattended and without any kind of vigilance by well-trained technicians is not an advisable practice. Modern mining companies are at present legally obligated to take care of safety and environmental issues related with mine water after mine closure and reclamation. There are many examples in Spain and worldwide where currently flooding pits have been subject to intensive monitoring programs and scientific research. Spanish examples include the Meirama coal mine pit lake in Galicia (Delgado et al. 2013), Reocín Pb–Zn mine pit lake in Cantabria (López-Pamo et al. 2010), and the Aznalcóllar mine pit lake in Seville (Santofimia et al. 2007; Schultze et al. 2006). All these examples represent a successful collaboration between

mining companies, environmental or regulatory agencies, and research institutions. However, this was not the case in the past: most open pits were abandoned, without any kind of environmental control. With the mining companies usually dissolved and disengaged of any civil responsibility, the corresponding mining authorities have been in charge of maintaining a minimum degree of safety at these abandoned mine sites. Initiatives by these authorities, however, have been usually limited to building protective fences around the pit lakes to avoid accidents, and to place warning signs. Hydrogeological surveys or geotechnical studies have been completely non-existent in these flooded mine pits, and the general state of many of them is rather poor with regard to structural stability of slopes. Most of the research conducted in these pit lakes has been accomplished by government agencies and research institutes through research projects,

demonstration projects, or PhD theses. It would be highly advisable that the mining authorities with civil responsibility in these abandoned mine areas would run their own controls and monitoring programs with the aim of reducing the possibility of dangerous events.

Future Evolution of Guadiana Pit Lake

The future evolution of Guadiana pit lake is uncertain. Despite the important recent drop in CO_2 concentration and gas pressure, monitoring should be maintained in case the gas concentrations and gas pressures return. The evolution of TDG pressure must be followed with a certain frequency to calculate possible CO_2 recharge rates and make accurate predictions. The speed at which gas pressure will recover to pre-degassing values will depend on several factors, including the: (i) input of groundwater recharge at depth, (ii) composition (e.g. pH, metal concentration) and gas content of this groundwater, and (iii) water/rock interaction in the pit walls and adjacent mine tunnels. The pH of the deepest part of the lake, where gas pressure was higher (45–70 m) has not changed significantly during the degassing period (Fig. 7c). Thus, reactivation of carbonate dissolution in this zone is not expected.

In any case, the controlled degassing activity in the lake has provoked drastic changes in the stratification by inducing irreversible changes in the water column with respect to the conditions existing in 2014 (Fig. 7), when the mixolimnion was only 10 m thick and hardly represented 28% of the total lake volume, the rest being occupied by the monimolimnion. Today, this proportion has been inverted and the present 41 m thick mixolimnion represents $\approx 80\%$ of the lake volume, while the monimolimnion only represents the remaining 20%. This has deep implications for the overall safety of the mine site, since the volume left for potential accumulation of additional CO_2 in the future is now outstandingly less than in 2014, which obviously represents a clear benefit. In any case, the big pipes installed in the pit lake could be reactivated if the gas pressure increases.

Predictive Studies and Long-Term Monitoring in Pit Lakes

The Guadiana pit lake case has also revealed the importance of hydrogeochemical research and monitoring programs in flooded mines in general and in pit lakes in particular. This research not only shows important features about the chemistry, limnology, and stratification dynamics of pit lakes with potential use in remediation initiatives, but also can be of great help in predicting future lake evolution and anticipating certain problems before they occur. Geochemical modelling combined with hydrodynamic modelling has proven to be a powerful tool in lake and reservoir managing, and

has been successfully applied in AMD-impacted reservoirs and pit lakes (e.g. Delgado et al. 2013; Torres et al. 2016). One-dimensional hydrodynamic-ecological models, such as DYRESM–CAEDYM (e.g. Cui et al. 2016) can be used to investigate the interactions between physical, chemical, and biological processes that occur in pit lakes over different time scales.

More attention should be paid to the accumulation of dissolved gases in deep strata of meromictic pit lakes. Here, the combination of biological activity (e.g. bacterial metabolisms generating CO_2 , H_2S , or CH_4) and geochemical processes (e.g. dissolution of carbonates present in wall rocks, sediments and/or wastes dumped in the mine galleries), and hydrogeological dynamics (groundwater inflow carrying dissolved gases) may lead to the storage of these gases and their gradual increase in concentration over time. Quick surveys with gas pressure sensors such as the ones shown in this study (Fig. 12), if repeated with certain frequency (e.g. once a year) should allow one to calculate recharge rates of the gas of concern and predict the possible temporal evolution of gas pressure in a particular pit lake. This problem will probably not exist in circumneutral pit lakes, because in these water bodies dissolved inorganic carbon is chiefly present as bicarbonate (HCO_3^-) and carbonate (CO_3^{2-}) ions, and carbon dioxide is usually negligible (Sánchez-España et al. 2008, 2013). Surveillance should be focused on meromictic acidic pit lakes, especially if carbonates are present in the area. Lime or carbonate addition to neutralize acidity in these pit lakes should generally be avoided unless the neutralization process will be fast enough to convert all of the dissolved inorganic carbon to carbonate or bicarbonate species in a relatively short period of time, thus preventing the accumulation of CO_2 at the first stages of low pH (e.g. < 5.0 – 5.5).

Technical Issues when Pumping Metal-rich Acidic Mine Water

A big difference with respect to the degassing operations conducted in volcanic crater lakes like Nyos and Monoun in Cameroon, where lake degassing technology was developed in the 1990s after the tragic limnic eruptions happened in 1984 and 1986 (Halbwachs et al. 2004; Kling et al. 1994, 2005; Tanyileke et al. 2019), is the chemistry of the deep water pumped to the lake surface. The high acidity and metallic content (especially iron) of this water makes it highly corrosive for steel valves, taps, regulators, buoys, and ropes, which are soon covered by thick mineral coatings (Fig. 9c, d). The metallic elements had to be protected with plastic bags to extend their useful life, and were also inspected and cleaned in every control. However, the main disadvantage of bringing the deep water with high metallic

load to the surface was the worsening of the water quality compared to pre-degassing conditions. The continuous oxidation of ferrous iron and consequent precipitation of ferric iron has led to significant acidification of the entire mixolimnion and increased metal concentrations (e.g. Zn, Mn; Fig. 10).

The input of arsenic (present at very high concentrations in the deep water; Sánchez-España et al. 2014) was also of some concern. However, the abundant ferric mineral colloids formed in the lake surface (mostly consisting of schwertmannite, which is a well-known adsorbent) prevent the concentration of this element from increasing, since it readily adsorbs to iron precipitates. This has been checked by chemical and electron microscopy analyses (SEM–EDS) of suspended particulate matter sampled in the lake for several seasons (not shown).

Several attempts were made to reintroduce the pumped water back to the deep part of the lake by installing 20 m-long plastic cylinders around the pipes. These systems reintroduced a significant part of the pumped water, which progressively sunk to deeper layers by density. However, much of the fountaining water mixed with the pit lake surface, especially in days of strong wind. In any case, considering that the Guadiana mine waters do not have any use and do not mix with local streams, the question of water quality in the upper part of the lake was considered a minor collateral effect that appeared acceptable in view of the benefit of the degassing operations.

Acknowledgements The HERCO₂ project has been funded by the *Dirección General de Industria, Energía y Minas, Junta de Andalucía* (General Division of Industry, Energy and Mines, Andalusian Regional Government) through contract number MEN/2017/0045. We thank Iván Maldonado and Ricardo Dieguez, mining engineers at the Bureau of Mines in Seville, for permission to access the mine and for their management in the context of the collaborative framework between IGME and Junta de Andalucía. We also thank Antonio Beltrán, Mayor of the Puebla de Guzmán Municipality, for his encouragement and help during the degassing operations and our colleagues from the IGME laboratories (Jesús Reyes, Ana Nieto, Mercedes Castillo, Maite Andrés) for the chemical analyses of water samples. Our most special gratitude goes to Mr. José Suárez, former mining engineer in the Bureau of Mines, Professor at the University of Huelva, and President of *Asociación Herrerías* (a non-profit foundation devoted to the preservation and dissemination of Herrerías historical mining heritage) for his tireless and continuous support. Finally, we thank Dmitri Rouwet and an anonymous reviewer for their comments on an earlier version of this manuscript, and the editors of this journal for their editorial comments and suggestions.

References

- Ansede M (2016) The danger hiding under Spain's 'killer lake'. El País, https://elpais.com/elpais/2016/07/25/inenglish/1469440871_222255.html
- Boehrer B, Magin K, Yusta I, Sánchez-España J (2016) Quantifying, assessing and removing extreme gas load from meromictic Guadiana pit lake, southwest Spain. *Sci Total Environ* 563–564:468–477
- Boehrer B, von Rohden C, Schultze M (2017) Physical features of meromictic lakes: Stratification and circulation. In: Gulati RD, Zadereev ES, Degermendzhi AG (eds) *Ecology of meromictic lakes*. Springer, Heidelberg, pp 15–34
- Boehrer B, von Tümpling W, Mugisha A, Rogemont C, Umutoni A (2019) Reliable reference for the methane concentrations in Lake Kivu at the beginning of industrial exploitation. *Hydrol Earth Syst Sc*. <https://doi.org/10.5194/hess-2019-228>
- Cui Y, Zhu G, Li H, Luo L, Cheng X, Jin Y, Trolle D (2016) Modeling the response of phytoplankton to reduced external nutrient load in a subtropical Chinese reservoir using DYRESM-CAE-DYM. *Lake Reserv Manag* 32:146–157
- Delgado J, Juncosa-Rivera R, Falcón-Suárez I, Canal-Vila J (2013) Four years of continuous monitoring of the Meirama end-pit lake and its impact in the definition of future uses. *Environ Sci Pollut Res Int* 20(11):7520–7533
- Geller W, Schultze M, Wisotzky F (2013) Remediation and management of acidified pit lakes and outflowing waters. In: Geller W, Schultze M, Kleinmann R, Wolkersdorfer C (eds) *Acidic pit lakes*. Springer, Heidelberg, pp 225–264
- Halbwachs M, Sabroux JC, Granjeon J, Kayser G, Tochon-Danguy JC, Felix A, Beard JC, Villeveille A, Vitter G, Richon B, Wuest A, Hell J (2004) Degassing the “killer lakes” Nyos and Monoun. *Cameroon. EOS* 85(30):281–288
- Horn C, Metzler P, Ullrich K, Koschorreck M, Boehrer B (2017) Methane storage and ebullition in monimolimnetic waters of polluted mine pit lake Vollert-Sued, Germany. *Sci Total Environ* 584–585:1–10
- Kling GW, Evans WC, Tuttle MI, Tanyleke G (1994) Degassing of Lake Nyos. *Nature* 368:405–406
- Kling GW, Evans WC, Tanyleke G, Kusakabe M, Ohha T, Yoshida Y, Hell JV (2005) Degassing lakes Nyos and Monoun: defusing certain disaster. *Proc Natl Acad Sci* 102:14185–14190
- López-Pamo E, Sánchez-España J, Díez M, Santofimia E, Reyes A (2009) Cortas mineras inundadas de la Faja Pirítica: Inventario e hidroquímica. Serie Medio Ambiente, N° 13, Publicaciones del Instituto Geológico y Minero de España, Ministerio de Ciencia e Innovación, Madrid
- López-Pamo E, Sánchez-España J, Santofimia E, Reyes J, Martín-Rubí JA (2010) Limnología físico-química del lago formado durante la inundación de la Corta de Reocín, Cantabria (Marzo 2009–Febrero 2010). Instituto Geológico y Minero de España (IGME), Ministerio de Ciencia e Innovación, Unpubl Report, Madrid
- Murphy WM (1997) Are pit lakes susceptible to limnic eruptions? *Proceedings, tailings and Mine Waste* 97. Balkema, Rotterdam, pp 545–547
- Nordstrom DK, Alpers C (1999) Geochemistry of acid mine waters. *Rev Econ Geol*, vol. 6A, The environmental geochemistry of mineral deposits, part A: processes, techniques, and health issues, 133–160
- Pinedo Vara I (1963) *Piritas de Huelva. Su historia, minería y aprovechamiento*. Ed Summa, Madrid
- Sánchez-España J, López-Pamo E, Santofimia E, Díez-Ercilla M (2008) The acidic mine pit lakes of the Iberian pyrite belt: an approach to their physical limnology and hydrogeochemistry. *Appl Geochem* 23:1260–1287
- Sánchez-España J, Díez M, Santofimia E (2013) Mine pit lakes of the Iberian pyrite belt: some basic limnological, hydrogeochemical and microbiological considerations. In: Geller W, Schultze M, Kleinmann B, Wolkersdorfer C (eds) *Acidic pit lakes: the legacy of coal and metal surface mines*. Springer, Heidelberg, pp 315–342

- Sánchez-España J, Boehrer B, Yusta I (2014) Extreme carbon dioxide concentrations in acidic pit lakes provoked by water/rock interaction. *Env Sci Technol* 48:4273–4281
- Sánchez-España J, Yusta I, Gray J, Burgos WD (2016) Geochemistry of dissolved aluminium at low pH: extent and significance of Fe–Al coprecipitation below pH 4.0. *Geochim Cosmochim Acta* 175:128–149
- Sánchez-España J, Yusta I, Suárez J (2018) Communicating geochemical threats to local and regional authorities: the Guadiana pit lake experience. *Goldschmidt Conf Abstr*, Boston
- Santofimia E, López-Pamo E, Sánchez-España J, Schultze M, Friese K (2007) Hydrogeochemical evolution of the Aznalcollar pit lake during the spill of a pyrite pile. In: Cidu R, Frau F (eds) *Proceedings International Mine Water Assoc Conf*, Cagliari, Italy, pp 453–457
- Schultze M, Friese K, Sánchez-España J, López E (2006) Pit lake Aznalcóllar—water chemistry and options of control. In: Barnisel RI (ed) *Proceedings of the 7th international conference on acid rock drainage (ICARD)*, ASMR, Lexington, USA, pp 1927–1935
- Schultze M, Boehrer B, Wendt-Potthoff K, Sánchez-España J, Castendyk D (2017) Meromictic pit lakes: case studies from Spain, Germany and Canada and general aspects of management and modelling. In: Gulati RD, Zadereev AE, Degermendzhi AG (eds) *Ecology of Meromictic Lakes*, ecological studies 228. Springer, Cham, pp 235–275
- Tanyileke G, Ntchantcho R, Yetoh Fantong W, Tongwa Aka F, Hell JV (2019) 30 years of the lakes Nyos and Monoun gas disasters: a scientific, technological, institutional and social adventure. *J African Earth Sci* 150:415–424
- Torres E, Galván L, Cánovas CR, Soria-Píriz S, Arbat-Bofill M, Nardi A, Papaspyrou S, Ayora C (2016) Oxycline formation induced by Fe(II) oxidation in a water reservoir affected by acid mine drainage modeled using a 2D hydrodynamic and water quality model—CE-QUAL-W2. *Sci Total Environ* 562:1–12
- Younger PL, Banwart SA, Hedin RS (2002) *Mine water: hydrology, pollution, remediation*. Kluwer Academic Publishers, Dordrecht