

Effects of abandoned gold mine tailings on the arsenic concentrations in water and sediments of jack of clubs lake, B.C.

J.M. Azcue , A. Mudroch , F. Rosa & G.E.M. Hall

To cite this article: J.M. Azcue , A. Mudroch , F. Rosa & G.E.M. Hall (1994) Effects of abandoned gold mine tailings on the arsenic concentrations in water and sediments of jack of clubs lake, B.C., Environmental Technology, 15:7, 669-678, DOI: [10.1080/09593339409385472](https://doi.org/10.1080/09593339409385472)

To link to this article: <https://doi.org/10.1080/09593339409385472>



Published online: 17 Dec 2008.



Submit your article to this journal [↗](#)



Article views: 180



View related articles [↗](#)



Citing articles: 50 View citing articles [↗](#)

EFFECTS OF ABANDONED GOLD MINE TAILINGS ON THE ARSENIC CONCENTRATIONS IN WATER AND SEDIMENTS OF JACK OF CLUBS LAKE, B.C.

J.M. AZCUE^{1*}, A. MUDROCH¹, F. ROSA¹ AND G.E.M. HALL²

¹ Lakes Research Branch, National Water Research Institute, P.O.Box 5050,
Burlington, ON, L7R 4A6, Canada

² Geological Survey Canada, 601 Booth Street, Ottawa, ON, K1A 0E8, Canada

(Received 18 December 1993; Accepted 1 March 1994)

ABSTRACT

From 1933 to 1964 gold was extracted by underground mining at the northeast shore of Jack of Clubs Lake. At present, tailings and waste rock 4.5 m thick covers approximately 25 hectares of land adjacent to the lake. Arsenic concentrations ($>2,000 \mu\text{g.g}^{-1}$) were found in the tailing materials. Two simultaneous processes are controlling the elevated As concentrations in the lake sediments (up to $1,104 \mu\text{g.g}^{-1}$), deposition of suspended particles enriched with As and subsequent diagenetic cycling of sedimentary As. Arsenic concentrations (as high as $556 \mu\text{g.L}^{-1}$) in water samples adjacent to the tailings indicate mobilization of As. However, dissolved As is readily scavenged or coprecipitated with iron hydroxides. The greatest proportion of As in the sediment cores is associated with iron oxides and sulphides. Under oxic conditions the high concentrations of Fe in the tailings is actually beneficial and very effective at limiting the migration of undesirable elements.

Keywords: Arsenic, lakes, mining, water, sediments

INTRODUCTION

Gold mining has been a major activity in Canada for over a century. Since 1921 Canada has occupied second or third place among the world's gold producing nations (1). Like many other industries, gold mining has generated wastes, such as tailings and waste rock, which contain some naturally occurring and potentially toxic elements found in the metal ore, and toxic elements and compounds introduced during the various stages during the extraction of the metals from the ore. Arsenic is widely diffused in nature and occurs in many types of gold ore deposits. The principal As-minerals are arsenopyrite, niccolite, cobaltite, tennantite, enargite, orpiment and realgar (2).

Arsenic used to be extracted as a byproduct in many gold mines and sold mainly for the manufacture of pesticides (3). However, the ban of using As-pesticides on food crops diminished considerably the demand for As. Since then, the extraction of As was not profitable, and large

quantities of As had been abandoned in the gold mine tailings and waste rock. The mobility and potential toxic effects of As have been reported in gold mining areas in Canada (4,5), Montana, USA (6), Ghana (7), Brazil (8) and South Africa (9). At present this problem has been recognized in the majority of active gold mines. However, there are many abandoned gold mine wastes containing large quantities of As. One of such abandoned gold mining sites is located at Wells in the Cariboo region in British Columbia (Canada).

The Cariboo region has been an important mining area since the 1800's. Early in 1861 dozens of gold-bearing creeks were discovered and by 1960 most of the creeks in the Cariboo region had been prospected. The town of Wells (Figure 1), at the northeast shore of Jack of Clubs Lake (JCL) was built on the tailings from the old Lowhee Mine. Starting in 1933 the Gold Quartz Mining Company extracted gold by underground mining rather than panning, dredging, and sluicing until 1964. The mine produced in

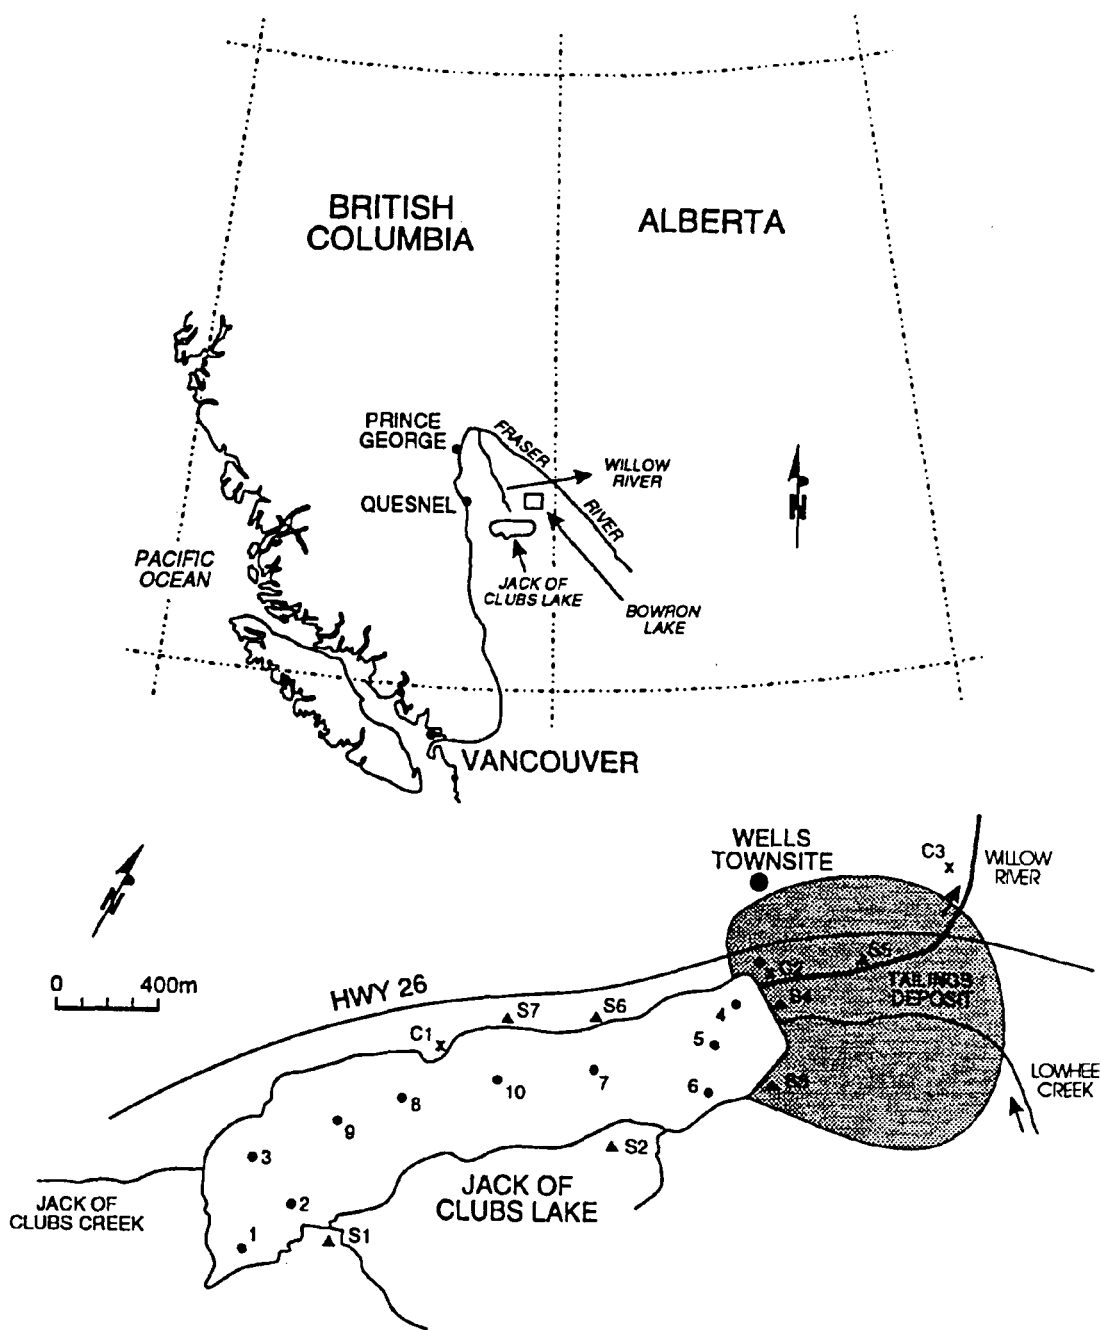


Figure 1. General map of the study area and location of the sampling stations (1 to 10 sampling sites in the lake; S1 to S7 streams and seepages; and C1 to C3 centrifuge locations for suspended sediment sampling).

excess of five million dollars worth of gold (10,11).

The results presented in this study are a part of a multidisciplinary investigation of the biological and geochemical effects of the abandoned gold-mine tailings in JCL and their impact on the Fraser River system (12). The

main objectives of this study were: 1) to determine the processes affecting the distribution of arsenic in water, suspended and bottom sediments, and sediment interstitial water of JCL, and 2) to evaluate the mobility of arsenic in the gold mine wastes abandoned for about 30 years.

MATERIALS AND METHODS

Study Area

Jack of Clubs Lake (JCL) is located in the Barkerville Terrane, which is mostly underlain by clastic sedimentary rocks, principally Precambrian and Palaeozoic sandstone with minor proportions of limestone and mafic volcanic rocks (13). The tailings from the milling and gold extraction were discharged into the northeast end of JCL, changing the original morphometry of the lake. At present, tailings deposits about 4.5 m thick cover approximately 25 hectares of land adjacent to the lake. The tailings are dissected by Highway 26, Lowhee Creek and Willow River (Figure 1).

Jack of Clubs Lake is 2.4 km long and 0.5 km wide, with a mean depth of 19 m and a maximum depth of 63 m. Its flushing rate is extremely rapid, averaging 0.8 years. Lowhee Creek flows through the tailings before it empties into the northeast end of JCL. During spring runoff the waters of the creek flood an extensive area of the tailings. Most of the sediments that have accumulated near the mouth of the creek are remnants of extensive hydraulic mining activities that occurred during the gold rush (14). A man-made channel dug through the tailings at the northeast end of the lake drains into the Willow River, the only outlet of the lake, which flows for 130 km before discharging into the Fraser River. Part of the water flowing through this channel originates as groundwater seepage from the tailings and does not reach the lake.

Bowron Lake located inside the Bowron Lake Provincial Park about 30 km east of Wells, was selected as a control or reference lake for the study because there are no reports of mining activities, past or present, along the lake. The bedrock in the watershed of Bowron Lake consists mainly of quartzite, limestone, shale, phyllite, dolomite, and conglomerates.

Sampling and Analytical Methods

Water samples:

The field work was carried out during the first week of August, 1992. Water samples were collected 1m below the surface and 1m above the lake bottom, at each of the 10 stations in the lake using a van Dorn bottle (15). Surface water samples from streams and seepages (S1 to S7 in Figure 1) were also collected. The water samples were filtered in the field within a few hours of collection using a Millipore glass filter

apparatus with 0.45 μm cellulose acetate filters. Samples were acidified with Ultrex grade HNO_3 to a final concentration of 0.4% and stored at 4°C until analyzed at the Geological Survey of Canada (16). At all sites continuous surface-to-bottom depth profiles of pH, specific conductance, dissolved oxygen, and temperature were recorded by a HYDROLAB Profiling System, Model DataSonde^R 3.

Sediment core sections 0 to 5, and 5 to 10 cm were extruded from the core liner under an atmosphere of nitrogen and squeezed separately to press out the interstitial water (as described in 17). The time between sample collection and termination of squeezing was less than 5 hours. Groundwater was sampled by means of piezometers previously inserted into the tailings. First, the water level in each piezometer well was measured and the standing water was pumped out. The piezometers were allowed to recover overnight, and the next day any water which had accumulated in the piezometers during the night was pumped out at a low flow rate, using prewashed polypropylene tubing. Once the water started to flow, the tubing was attached to an on-line 0.45 μm filter and several mL of water were passed through the filter. A flow-through cell was attached for determination of pH.

Arsenic was determined by formation of its hydrides using NaBH_4 as a reductant followed by analysis employing quartz tube AAS. Arsenic was reduced with KI and ascorbic acid prior to analysis so that the concentrations reported represent As(III) and As(V). Two controls, NBS 1643c and an in-house reference standard "tap", were included in each batch of samples processed.

Sediments:

Lake sediment samples were taken at 10 stations using a miniponar grab sampler. This sampler encompasses an area of 234 cm^2 and penetrates to an average depth of 5 cm. The sediment was placed in a glass tray, homogenized with a plastic spoon and transferred to prewashed plastic vials. Samples were stored at 4°C in the field and freeze-dried when taken back to the laboratory. Tailings samples were separated into six different particle size fractions: 54-140 μm , 40-54 μm , 27-40 μm , 19-27 μm , 13-19 μm , and <13 μm , by the "Sieve and Sedigraph Method", using a Warman Cyclosizer (WR-200) and sieves (LC-10B) (18). Carbon analyses were performed on freeze-dried samples using a LECO-12 Carbon Analyzer, and loss on ignition was determined by ashing dry

sediment at 450°C to constant weight.

A modified Kajak-Brinkhurst corer was used to collect sediment cores to examine vertical profiles of As concentrations in the sediment. For this purpose, sediment cores were subdivided into 1-cm sections and analyzed by AAS following application of the sequential leach scheme outlined in Table 1. It should be borne in mind that these are operationally defined fractions and that some refractory minerals such as spinel, tourmaline, zircon, etc. are not dissolved effectively by this acid digestion, but the sulphides and oxides of interest in this study are. Arsenic was first separated from potential interferents such as Cu and Ni by coprecipitation with $\text{La}(\text{OH})_3$, which was formed by adding $\text{La}(\text{NO}_3)_3$ and NH_4OH to the extract. Two international lake sediment standard reference samples (TILL-2 and LKSD-4) produced by the GSC (19) were used to testify the precision and accuracy attained in the analyses. The values obtained for the reference samples were within the certified range of both lake materials. All calibration solutions for measurement by AAS were made up in the same matrix as the analytes in each of the five leaches.

Suspended sediments were recovered from three locations in the study area (C1, C2 and C3 in Figure 1): (1) at the centre of JCL, three meters below the water surface; (2) from the outflow of the lake (the Willow River); and (3) from the Willow River at the end of its passage through the town of Wells. About 2,000 litres of water were pumped into a Westfalia separator at a flow rate

of $4 \text{ L}\cdot\text{min}^{-1}$ to remove the suspended sediments, which were then freeze-dried, weighed, homogenized by grinding, and analyzed (20).

RESULTS AND DISCUSSION

Water Quality

Primary production, based on the chlorophyll levels in the lake, at least during our sampling period, was extremely low (ranging from <0.1 to $1.1 \mu\text{g}\cdot\text{L}^{-1}$). According to other research results (21) sediment microbial activities were found to be suppressed by tailings deposited in the lake. The low primary production can not be attributed to low or limiting nutrients. It is speculated that the primary production is affected by the tailings deposited in the lake. Both JCL and Bowron Lake are thermally stratified with epilimnion and thermocline thickness between 5 to 7 m, and 2 to 4m, respectively. The remainder of the water column consists of a cold ($7\text{-}9^\circ\text{C}$) hypolimnion. In JCL, conductivity in the water is at minimum near the thermocline and increases in the hypolimnion. The greatest difference in conductivity in the water column from surface to bottom was recorded at stations 6, 5, and 4 which are close to the tailings (Figure 1). This increase is due to the increase of SO_4^{2-} (up to 53%) released from the sediment after oxidation of sulfides. pH in surface water ranges from approximately 7.8 at station #4 to 8.3 at station #1. Bottom water has lower pH at station #4 due to SO_4^{2-} ions. The

Table 1. Sequential extraction scheme.

Extractant	Phase dissolved
1M NaOAc. HOAc pH5 [1g/20 ml; 2 x 6 h constant shaking] (two 6h extractions; app. 2d)	1-Carbonates, adsorbed metals, exchangeable metals
0.25 M $\text{NH}_2\text{OH}\cdot\text{HCl}$ in 0.25M HCl [At 60°C ; first leach for 2 h, second leach for 0.5 h] (2 and 0.5 hour extractions; approx. half a day)	2-Amorphous oxyhydrates of Fe and Mn. Hydroxylamine hydrochloride is preferred to oxalate reagent as its attack on organic matter is minimal.
1 M $\text{NH}_2\text{OH}\cdot\text{HCl}$ in 25% HOAc [At 90°C ; first leach for 3 h, second leach for 1 1/2 h] (3 and 1.5 hours extractions; approx. one day)	3-Crystalline Fe oxides (e.g. hematite, goethite, magnetite, maghemite, lepidocrocite)
KClO_3/HCl for 0.5 h followed by 4 M HNO_3 at 90°C (30 and 20 min; approx. half a day)	4-Sulphides, organic matter
$\text{HF}/\text{HClO}_4/\text{HNO}_3/\text{HCl}$ evaporation (approx. 1 day)	5-Silicates, residual crystalline fraction

oxygen concentration is greater than 7.5 mg.L⁻¹ at all sampling stations, with a consistent concentration minimum in the thermocline. This minimum is typical in stratified systems and is attributed to decaying organic matter trapped in the thermocline.

The major sources of water (and hence possible contaminants) for JCL which were sampled in this project comprise sites: S1 (stream about 1 m wide at JCL with a rapid flow); S2 (stream about 0.3 m wide at JCL with a good flow); S3 (seepage water situated on the tailings just downslope from the abandoned mine operation); S4 (Lowhee Creek having traversed tailings); S5 (drainage from the tailings closest to the road); S6 (drainage through culvert of steep slopes north of Hwy 26) and S7 (drainage through culvert from steep slopes on north side of Hwy 26) (Figure 1). Heavy iron oxide staining was visible all along Willow River from JCL to its confluence with Williams Creek; tailings banks are also present in this area of north Wells.

The seepage water at site S3 was sampled after a rainy night. It contained the greatest As concentrations (556 µg.L⁻¹), as might be suspected from its pH of 2.7. Sample S3 is highly anomalous in other elements such as: S as SO₄ at 640 mg.L⁻¹; Fe at 163 mg.L⁻¹ and Pb at 144 µg.L⁻¹. In the rainy season, seepage from this site would

reach JCL via the wide gully running down the south-east side of the tailings. This seepage water was similarly high in the elements listed above. It is clear that the influence of leaching from the main tailings bed and from the general area of the Island Mountain Mine on the other side of the road is quickly dissipated. The concentrations of Fe, SO₄ and As have fallen to about 100 µg.L⁻¹, 35-40 mg.L⁻¹ and 0.5 µg.L⁻¹, respectively just before the confluence of Willow River and Williams Creek.

Data for these samples are compared in Table 2 with surface and bottom lake samples. Clearly, in terms of absolute concentration, site S3 is the most significant. Arsenic concentrations in the lake itself are low and pH is neutral. Arsenic concentrations in station #4, nearest the tailings, is higher than the other lake samples, however, the difference is more significant for other elements like Pb, 0.11 µg.L⁻¹ in station #4 and <0.02 µg.L⁻¹ in station #3. While the chemistry of major ions of JCL water is quite different from that of Bowron Lake (e.g. SO₄ 10-20 mg.L⁻¹ in JCL vs. 2 mg.L⁻¹ in Bowron Lake), As concentrations are similar (averaging 0.26 µg.L⁻¹ in both lakes).

Results of pore water analyses are presented in Table 2. Concentrations of As in the pore water are approximately two orders of

Table 2. Arsenic concentrations in water (µg.L⁻¹) and solid phase (µg.g⁻¹) [Detection limit = 0.2 µg.L⁻¹].

	Average	n	s.d.	Maximum	Minimum
Jack of Clubs Lake:					
<i>Dissolved water:</i>					
JCL - surface	0.25	22	0.09	0.30	<0.2
JCL - bottom	0.30	15	0.07	0.41	<0.2
Streams	17.5	41	93	556	<0.2
<i>Pore water:</i>					
0-5 cm	76	8	13	91	65
5-10 cm	158	10	107	361	51
tailings	163	12	57	281	102
<i>Bottom sediments</i>					
Jack of Clubs Lake	342	10	296	1,104 (JCL #5)	80 (JCL #9)
Tailings	1529	9	696	2,485	903
<i>Suspended matter</i>					
JCL- station #8	245	3	26	283	224
Willow R. (outflow)	1216	3	76	1311	1124
Willow R.(downstream)	343	3	43	394	289
Bowron Lake:					
Dissolved water	0.26	6	0.14	0.42	<0.2
Pore water	22	4	2.0	24	21
Bottom sediments	19	6	3.7	23	16

magnitude greater than in lake water. The greatest concentrations of As, were found in the pore water collected from the tailings ($163 \mu\text{g.L}^{-1}$). The concentrations of dissolved As are not different between the surface and bottom waters of the lake, thus, it suggests that during the stratification period the As is not being regenerated from the sediments. At some sampling stations the concentration in the bottom water are lower which implies that the sediments are acting as a 'sink' rather than a 'source'. Arsenic is effectively removed from solution as the pH increases and Fe and Mn oxyhydroxides are precipitated. Hydrous Fe oxide has a pH_{pzc} (point zero of charge) of about 8.6 and so has a net positive surface charge in natural lake environments (22). According to these preliminary results, JCL seems to have been only partially impacted by contaminants towards the north end of the lake.

Sediment Quality

The concentrations of total carbon in bottom sediments from JCL ranged from 1.4 to 4.3%. Concentrations of organic carbon in the sediments at station #1 at the southwest end of the lake reached values as high as 4%. Adjacent marshes on the shore most likely contributed organic matter to the bottom sediments in this part of the lake. The lowest concentrations of organic carbon were found in the sediments at station #5, which appeared to be in the area most strongly affected by the tailings on the northeast shore of the lake. The concentrations of inorganic carbon, which probably represents calcite in the sediments, were relatively uniform at all sampling stations with the exception of station #5 where it was about three times greater.

The greatest concentrations of As (up to $1,104 \mu\text{g.g}^{-1}$) were found in the sediments at station #5. The results showed that the northeast end of the lake was the most severely contaminated area and that this area extends about 500m towards the centre of the lake. The concentrations of As in the tailing materials ranged from 903 to $2,485 \mu\text{g.g}^{-1}$. It is well known that the metal concentrations in the different particle size fractions of the sediments are very important in the evaluation of the transport of metals (20, 23). Figure 2 shows the concentrations of As and Pb in six particle size fractions of sediments collected in the tailings. The greatest concentration of Pb ($3,470 \mu\text{g.g}^{-1}$) was found in the $<13 \mu\text{m}$ size fraction, with

decreasing concentrations with increasing size fractions. Consequently, large quantities of Pb bound to the fine silt and clay fractions ($<13 \mu\text{m}$ particle size) may be mobilized by erosion of the fine particles and physico-chemical changes of environmental conditions at the site where the fine-grained particles settle. On the other hand, As concentration was greatest ($>2,000 \mu\text{g.g}^{-1}$) in the $45\text{--}53 \mu\text{m}$ size fraction, with decreasing concentrations in the smaller particle size fractions. Thus, As preferentially bound to sediment particles (i.e., silt) tends to be less mobilized by erosional processes.

The greatest concentrations of As ($1,216 \mu\text{g.g}^{-1}$) in the suspended sediments were found in the samples collected from the Willow River at the outflow from JCL and decreased with increasing distance from the lake. The concentrations of As ($245 \mu\text{g.g}^{-1}$) in the suspended sediments in the middle of the lake (station #8) were similar to those in the bottom sediments ($277 \mu\text{g.g}^{-1}$) from the same area in the lake. The elevated levels of As in the tailing materials and in the suspended matter at the outflow of the lake confirmed that under strong erosion conditions (rainy season) particulate-As could be the main pathway of transport of As out of the tailings.

The variation in elemental concentration with depth in the five phases extracted from sediment cores from JCL (station #10) and Bowron Lake are shown in Figure 3. Core 10 was collected at a water depth of ca. 40 m about 1100 m from the tailings, and presumably during spring run-off and times of flooding would receive both material flushed mechanically from the tailings and water carrying high contents of dissolved salts. There is a large difference in the magnitude of As concentrations between JCL and Bowron Lake. In sediment cores from Bowron Lake, As is in the range of $12\text{--}23 \mu\text{g.g}^{-1}$. While in JCL cores As values lie in the ranges of $93\text{--}574 \mu\text{g.g}^{-1}$. By far the dominant phases of As in Bowron Lake sediment cores are phases 2 and 3 where amorphous Fe and Mn (oxides and oxyhydroxides) and crystalline Fe are preferentially extracted. However, As in JCL is held mainly in phases 3 and 4 (largely sulphides), with 2 being the next most significant. These profiles follow closely those for Fe, with marked depletion at the sediment-water interface. These observations are consistent with the theory that As cycling in freshwater is mainly controlled by coprecipitation with hydrous oxides in the water column and further reduction in the deep sediments (24-26).

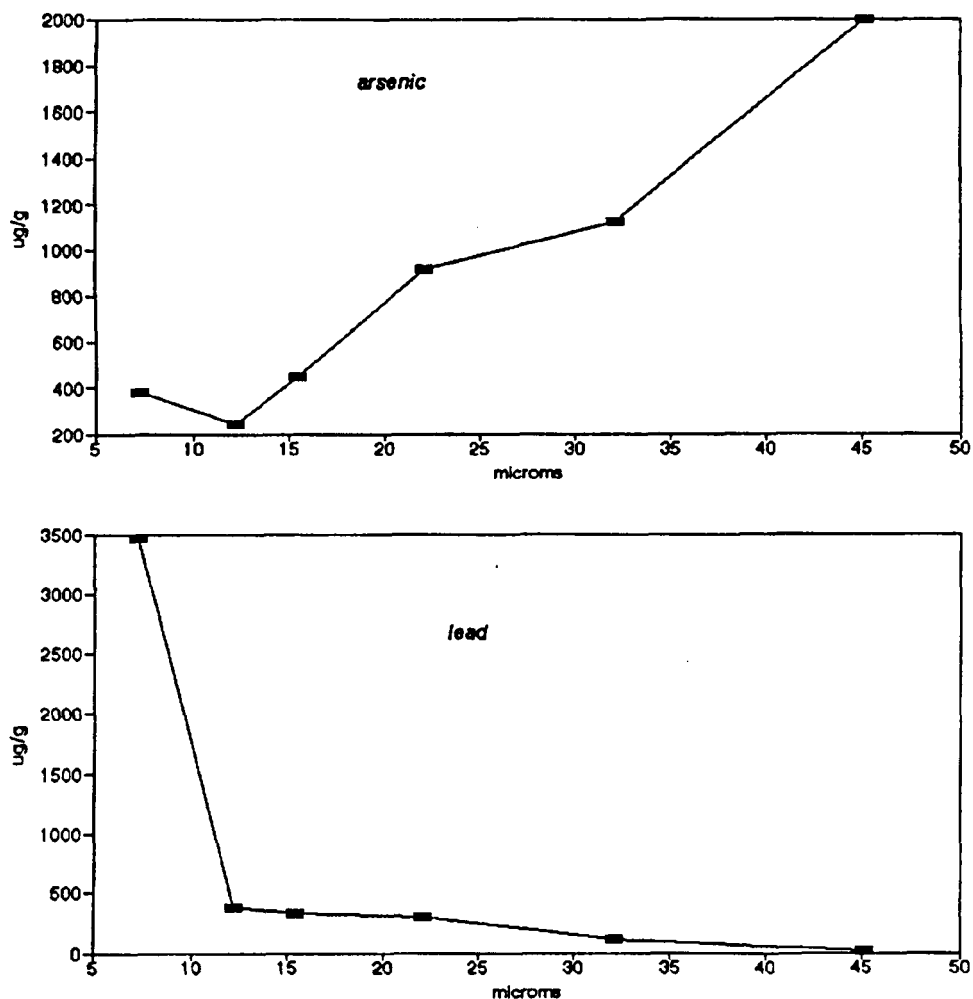


Figure 2. Concentrations of arsenic and lead in six particle size fractions of the tailings from Wells (B.C.) separated by a cyclosizer.

Our interpretation of these data must, of course, be regarded as tentative owing to the absence of information on subjects such as sediment stratigraphy, the hydrological history of JCL, and dates of core horizons. A peak in the concentrations of As at the 4 to 6cm depth in the sediment collected at station #10 in JCL, could have resulted from diagenetic remobilization of As or most likely reflects the inputs of this element from past gold mining activities at the Cariboo Gold mine around 1940. This assumes the annual sedimentation rate of 1 to 2mm in the lake. The greatest proportion of As in the sediment cores is associated with iron oxides and sulphides, implying mechanical dispersion from the tailings. Arsenic in true solution appears to be readily scavenged by amorphous iron hydroxides in the lake sediment or by coprecipitation with iron hydroxide on surface media (rocks, tailings themselves) which is prevalent in the area surrounding JCL.

Therefore, the high concentration of Fe in the tailings originating from pyrite (associated with Au) is actually beneficial and very effective at limiting the migration of undesirable elements. However, under anoxic conditions, large quantities of As associated with Fe oxyhydroxides may be released into the hypolimnion.

Figure 3 shows the historical changes of the percentages of As bound to different chemical fractions of sediments from JCL (station #10) and Bowron Lake. The significant changes in the As associated with Fe hydroxides and sulphides at the water-sediment interface, reflect the sensitivity of As to changes in the redox conditions. The forms of As and their distribution sequence in JCL are generally consistent with observations in other polluted sediments (4,6). Although the benthic community was only partially affected, there was evidence that the tailings inhibited a variety of microbial activities in the lake sediments (12).

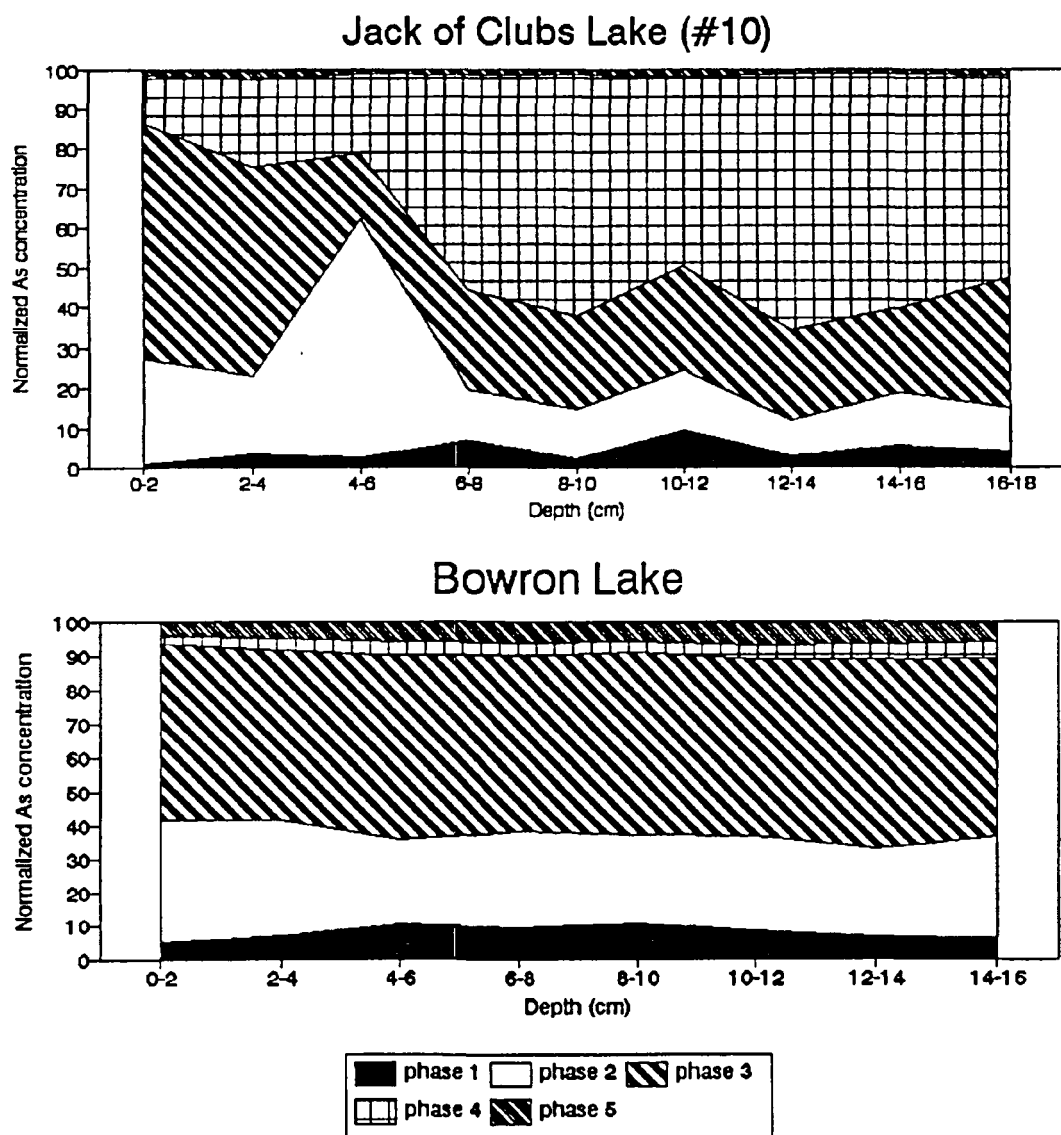


Figure 3. Profiles of arsenic percentages in sediments from Jack of Clubs and Bowron Lakes. (phases: 1= exchangeable; 2= amorphous oxyhydrates of Fe and Mn, 3= crystalline Fe oxides; 4= sulphide and organic matter; 5= residual).

CONCLUSIONS

Based on the previous results several conclusions can be made, bearing in mind, that these results were collected during the summer period. Consequently, for a more precise interpretation seasonal data would be required. The concentrations of As in several water samples indicate the present mobilization of As at low pH, for example, $556 \mu\text{g.L}^{-1}$ of As at pH 2.7 in the seep near the old mine. This indicates that the northeast part of JCL has been impacted by the tailings deposited on the shore to much greater

extent than the southwestern part of the lake. The concentration profiles of As in the sediments in JCL suggest that two simultaneous processes are controlling the rich surficial As concentrations, first mechanical and hydromorphic dispersion of As from its source, such as arsenopyrite, in the tailings, followed by a diagenetic cycling of As near the water-sediment interface.

The concentrations of As in sediment pore water in JCL was about two orders of magnitude greater than that in the lake water. However, there is no migration of As from the sediments

into the overlying water, as evidenced by equal concentrations of As in the surface and bottom water in the lake. This indicates that under oxic conditions the bottom sediments act as a sink rather than a source of As. On the other hand, relatively high concentrations of As in the pore water may affect the health of the sediment biota (12).

REFERENCES

1. Cranstone D.A., The history of gold discoveries in Canada - an unfinished story. *CIM Bulletin*, **78**, 59-65 (1985).
2. Boyle R.W. and Jonasson I.R., The geochemistry of arsenic and its use as an indicator element in geochemical prospecting. *J. Geochem. Explorat.*, **2**, 251-296 (1973).
3. Nriagu J.O. and Azcue J.M., Food contamination with arsenic in the environment. In: *Food Contamination from Environmental Sources*, Nriagu J.O. and Simmons M.S. (eds), John Wiley & Sons, Inc. New York, pp. 121-143 (1990).
4. Azcue J.M. and Nriagu J.O., Arsenic forms in mine-polluted sediments of Moira Lake, Ontario. *Environ. Int.*, **19**, 405-415 (1993).
5. Mudroch A. and Clair T.A., Transport of arsenic and mercury from gold mining activities through an aquatic system. *Sci. Total Environ.*, **57**, 206-216 (1986).
6. Moore J.N., Ficklin W.H. and Johns C., Partitioning of arsenic and metals in reducing sulfidic sediments. *Environ. Sci. Technol.*, **22**, 432-437 (1988).
7. Manful G.A. and Verloo M., Environmental effects of arsenic contamination around a gold smelter in Ghana. In: *Proc. Int. Confer. Heavy Metals in the Environ.*, Toronto, CEP Cosult. Ltd., pp. 329-331 (1989).
8. Malm O., Reuther R. and Pfeiffer W.C., Arsenic concentrations in river sediments from different gold mining areas in Brazil. In: *Proc. Int. Conf. Heavy Metals in the Environ.*, Toronto, CEP Cosult. Ltd., pp. 130-133 (1989).
9. Förstner U. and Wittmann G.T.W., Metal accumulations in acidic waters from gold mines in South Africa. *Geoforum*, **7**, 41-49 (1976).
10. Harris L., *Barkerville. The Town that Gold Built*. Hancock House Publishers, Ltd. (1984).
11. Taylor G.W., *Mining. The History of Mining in British Columbia*. Hancock House Publishers, Ltd. (1978).
12. Mudroch A., Hall G.E.M., Azcue J.M., Jackson T.A., Reynoldson T. and Rosa F., Report on the effects of abandoned mine tailings at Wells, B.C., on the aquatic ecosystem of Jack of Clubs Lake. 1993. National Water Research Institute, Contribution 93-23 (1993).
13. Struik L.C., *Structural Geology of the Cariboo Gold Mining District, East-Central British Columbia*; Geological Survey of Canada, Memoir 421, 100 pp. (1988).
14. Andrews K.I., A Preliminary Investigation of Public Health and Environmental Impacts of Abandoned Mine Tailings at Wells, B.C. Willimas Lake, Ministry of Environment, British Columbia (1989).
15. Rosa F., Bloesch J. and Rathke D.E., Sampling the settling and suspended particulate matter. In: *Handbook of Techniques for Aquatic Sediment Sampling*, Mudroch A. and MacKnight S. (eds), CRC Incorporated, publishers, pp. 97-130 (1991).
16. Finch C., Hall G. and McConnel G., Current Research, New Fowland Department of Mines and Energy. **92**, 297-307 (1992).
17. Kalil E. K. and Goldhaber M., A sediment squeezer for removal of pore water without air contact. *J. Sedim. Petrol.*, **43**, 553-557 (1973).
18. Duncan G.A. and LaHaie G.G., Size analysis procedures used in the sedimentology laboratory, National Water Research Institute, Hydraulics Division, Environment Canada, September (1979).
19. Lynch J., *Geostand. Newsl.*, **14**, 153-167 (1990).
20. Mudroch A. and Duncan G.A., Distribution of metals in different size fractions of sediment from Niagara River. *J. Great Lakes Res.*, **12**, 117-126 (1986).
21. Azcue J.M., Mudroch A., Rosa F., Hall G.E.M., Jackson T.A. and Reynoldson T., Heavy metals concentrations in water, sediments, pore water and biota from an abandoned gold mine in Wells (B.C.), Canada. In: *Proc. Int. Conf. Heavy Metals in the Environ.*, Toronto, CEP Consul. Ltd., pp. 247-250 (1993).

22. Takamatsu T., Kawashima M. and Koyama, M., The role of Mn^{2+} -rich hydrous manganese oxide in the accumulation of arsenic in lake sediments. *Water Res.*, **19**, 1029-1032 (1985).
23. Förstner U., Accumulation phases for heavy metals in limnic sediments. *Hydrobiologia*, **91**, 269-284 (1982).
24. Aggett J. and O'Brien G.A., Detailed model for the mobility of As in lacustrine sediments based on measurements in Lake Ohakuri. *Environ. Sci. Technol.*, **19**, 231-238 (1985).
25. Belzile N. and Tessier A., Interactions between arsenic and iron oxyhydroxides in lacustrine sediments. *Geochim. Cosmoch. Acta*, **54**, 103-109 (1990).
26. Peterson M.L. and Carpenter R., Arsenic distributions in pore waters and sediments of Puget Sound, Lake Washington, the Washington coast and Saanich Inlet, B.C. *Geochim. Cosmochim. Acta*, **50**, 353-369 (1986).