



EVALUATION OF THE HYDRAULIC CHARACTERISTICS AND FLOW PATTERN IN A CONSTRUCTED WETLAND BY MEANS OF TRACER STUDIES

Part 1

T. Machate¹⁾, H. Behrens²⁾, D. Klotz²⁾, H. Noll³⁾, K.-W. Schramm³⁾, A. Kettrup³⁾

¹⁾ Umweltschutz Süd GmbH, Angererstr. 38, D-80796 München, Germany

²⁾ GSF-Forschungszentrum für Umwelt und Gesundheit, Institut für Hydrologie, Ingolstädter
Landstraße 1, D-85758 Oberschleißheim, Germany

³⁾ GSF-Forschungszentrum für Umwelt und Gesundheit, Institut für Ökologische Chemie,
Ingolstädter Landstraße 1, D-85758 Oberschleißheim, Germany

SUMMARY

Hydraulic parameters were studied in a free water-surface vertical flow constructed wetland plant. The coefficients of hydraulic permeability of a typha-planted and a scirpus-planted unit were determined at different loading rates. Fluorescent dyes (uranine, pyranine and eosin) were examined for their capability to determine the mean residence time in comparison to bromide. Bromide, eosin and pyranine yielded a slight retention of approx. 10% and 15 % compared to the theoretical residence time, whereas uranine was accelerated, as our results suggest.

Key words: constructed wetlands, hydraulic conductivity, fluorescent dyes, residence time

INTRODUCTION

The effectiveness of macrophyte based biological treatment systems depends on the contact between the pollutants and the microbial population attached onto the surface of the soil particles [1]. A sufficient time of residence is required to achieve a high purification. In this study transport phenomena of pollutants passing a constructed wetland plant were examined. The objectives of our research focus on the size-characterization of the applied filling material and the behaviour of several fluorescence dyes injected into the wetland plant in comparison with bromide as a conservative tracer.

The free water-surface wetland plant located in Munich, Germany, consisted of five cascade-like arranged steel tanks planted with *Typha* ssp. (tank 1 - 3) and *Scirpus lacustris* (tank 4 and 5). The

* Dedicated to Prof. Dr. W. Fresenius on the occasion of his 85th birthday

wetland plant (AQUAPLANT™) was supplied by the Umweltschutz Nord company in Germany. Water was fed into the first most elevated tank and passed the cascade by gravity. The total area of the cascade was approx. 27 m².

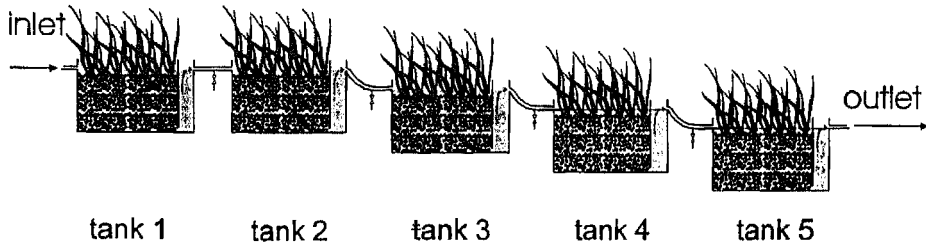


Fig. 1: Schematic view of the constructed wetland plant

RESULTS AND DISCUSSION

Hydraulic permeability

Filling material applied as substratum in the wetland plant was a coarsely graded porous lava with a nominal diameter of 2-8 mm. The particle size distribution curve (Fig. 2) exhibited a small size variability. The characteristic diameters obtained from the curve were: $d_{[10]} = 3.4$ mm, $d_{[50]} = 5.1$ mm and $d_{[60]} = 5.5$ mm. The mean diameter of the lava was approx. 5 mm. The uniformity coefficient as obtained from $U = d_{[60]}/d_{[10]}$ was 1.6.

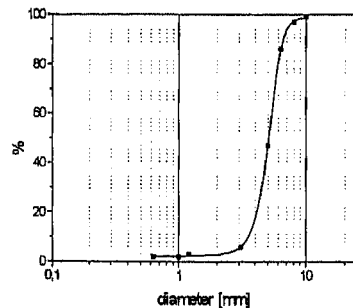


Fig. 2: Particle size distribution curve of the applied lava material

Due to a study of Beyer the coefficient of permeability can be derived from the Hazen-formula [2] as $k_f = 1.34 \times 10^{-1} \text{ m s}^{-1}$. This value coincided well with that of coarse gravel as reported by Hölting [2]. Data derived from the size distribution curve indicated a high permeability of the coarse lava material. In practice however, the hydraulic conductivity can be affected by spreading of the plant roots and soil clogging. Experiments were performed in two separated series at

different hydraulic loading rates in a *typha*- and a *scirpus*-planted unit of the pilot plant to estimate the k_f -value. The experimental coefficient of permeability [m s^{-1}] using the Darcy Equation [2] is given by:

$$k_f = Q \cdot l \cdot A^{-1} \cdot \Delta h^{-1}$$

- Q: flow rate [$\text{m}^3 \text{sec}^{-1}$]
 l: length [m]
 A: cross-sectional area [m^2]
 Δh : difference in elevation of the water level [m]

Depending on the hydraulic loading rate and the permeability of the filling material an elevation of the water level in the planted unit against the outlet device was observed. Experimental data are given in Tab. 1.

Tab. 1: Experimental coefficients of permeability at different loading rates

| tank 1 (<i>typha</i>) | | tank 5 (<i>scirpus</i>) | |
|---------------------------|-----------------------------|---------------------------|-----------------------------|
| Q [L min^{-1}] | k_f [m s^{-1}] | Q [L min^{-1}] | k_f [m s^{-1}] |
| 27 | 0.032 | 60 | 0.019 |
| 83 | 0.028 | 160 | 0.015 |
| mean | 0.030 | mean | 0.017 |

The different values within each unit (Tab. 1) at different loading rates were probably caused by misreadings of the water levels since the drop of the water level at the outlet of the tanks was fluctuating by several mm. The experimental k_f -values of approx. 3×10^{-2} resp. $1.7 \times 10^{-2} \text{ m s}^{-1}$ were much lower than the theoretical value obtained from the particle size distribution, indicating additional solid accumulation. As shown in Tab. 1, the permeability observed in the *scirpus*-planted unit (tank 5) was approx. 57% of that of the *typha*-planted unit (tank 1). These data confirmed our observation that in the *scirpus*-planted unit a compact root mesh was developed, creating a zone of higher hydraulic resistance. Similar effects were reported from Waters *et al.* [3] and Fisher [4].

Comparison of fluorescent dyes and bromide as tracers

In general, tracer compounds used for hydraulic experiments require a stability towards the environmental conditions in a wetland plant. Analytical methods yielding high sensitivity favor the application of dye stuffs as tracers. Fluorescence dyes are reported to be accessible to photo-

degradation, microbial attack [5] and both reversible and irreversible sorption phenomena [6]. Hence studies were carried out with bromide as a conservative tracer and three commonly used fluorescent dyes: uranine, pyranine and eosin.

The dyes were purchased from Simon und Werner, Bad Schwallbach. Fluorescent tracers were determined by spectrofluorometry using a Perkin-Elmer LS 5B fluorimeter. The analytical methods were described elsewhere [7,8]. Bromide was determined by means of ion chromatography. The tracer experiment was started in April and lasted for about 18 days. The average water temperature was approx. 11 °C. The following amounts of the tracer substances were used: Sodium bromide (10g), eosin (1g), uranin (0.5g) and pyranine (1g). Tracers (1 L aqueous solution) were applied simultaneously as pulse injection during 20 min at the inlet (tank 1) of the wetland plant. Samples were taken after defined time intervals at the outlet of tank 1 and tank 5 of the cascade by means of two autosamplers. Transit curves from tank 1 represent the time of residence in a single unit; the curves from tank 5 give the transit times of the whole cascade.

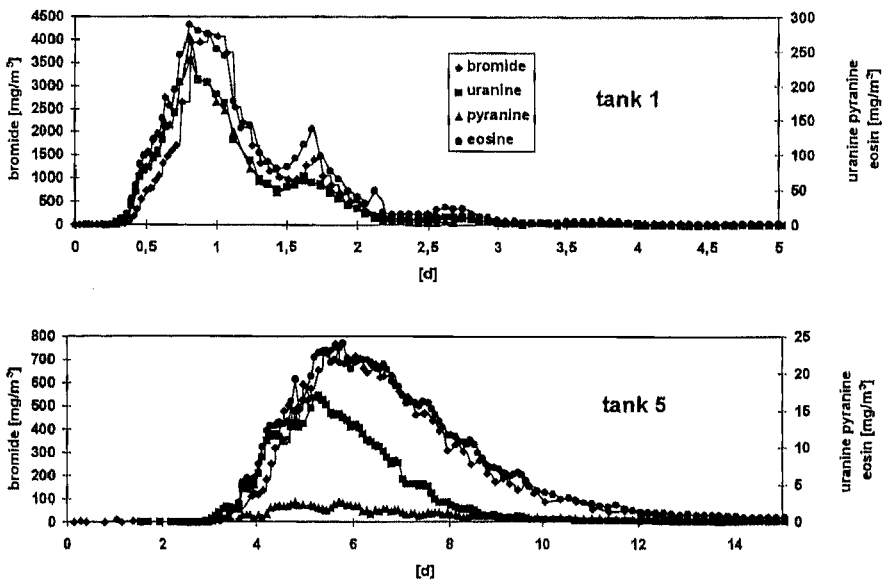


Fig. 3: Tracer response curves from tank 1 and tank 5

The tracer response curves from tank 1 exhibited no significant differences in the transit time of the injected compounds (Fig. 3). Secondary peaks as observed after approx. 1.7 days could be

attributed to a slight retardation due to circulations in the flooded layer of the unit. Three days after injection the transit of all applied substances in the first tank was complete. The half-width of the curves was approx. one day, indicating a moderate dispersion.

Considering the tracer response curve at tank 5 (indicating the transit of the whole cascade) the breakthrough curves of all substances started nearly at the same time (after 3 days); but unlike bromide and eosin the maximum concentration of uranine was reached approx. one day earlier. The broadening of the tracer pulses resulted in a half-width of several days and the peak heights of the curves were considerably lower than those of the first tank.

The theoretical residence time can be calculated by dividing the net system volume by the flow rate. The porosity according to $\%P = V_p/V_t \cdot 100$ was obtained by weighing the mass difference of a defined volume of dry and water filled lava and was found to be 55%. (V_p pore volume, V_t total volume). The mean residence times were obtained from the centres of gravity of the tracer response curves. The amounts of the tracers, recovered after the passage were calculated by multiplying the area of the response curves by the flow rate.

Tab. 2: Recovery rates of the applied tracers and mean residence times in tank 1 and 5

| | time of residence [d] | | | | | recovery rate [%] | | | |
|---------|-----------------------|---------|-------|----------|-------------|-------------------|---------|-------|----------|
| | bromide | uranine | cosin | pyranine | theoretical | bromide | uranine | eosin | pyranine |
| tank 1 | 1.19 | 1.15 | 1.3 | 1.13 | 1.2 | 87 | 49.6 | 75.3 | 51.34 |
| cascade | 6.82 | 5.85 | 7.27 | 6.84 | 6.2 | 78.7 | 13.4 | 29.1 | 2.81 |

With regard to a certain misreading of the experimental data no significant differences of the theoretical and experimental times of residence were observed in the first tank. In contrast, bromide and pyranine yielded a retention of approx. 10% after passage of the cascade (tank 5), for eosin the delay was at least approx. 15% of the theoretical value, whereas uranine seemed to be accelerated. The sorptive property of eosin was also reported by Netter [9], whereas no reference for an acceleration of dyes during the transit of a wetland plant was found in the literature. A marked retardation of uranine compared with bromide in a fine grading filter material was reported by Netter and Bischofsberger [10], whereas the difference was not as definite in a coarse grading material.

The low recovery rates of uranine and pyranine were assumingly due to microbial degradation [11]. A consecutive loss of approx. 50% in each of the five units would result in final recovery of approx. 3% in the outlet of the cascade. This assumption fits our finding in pyranine but not in uranine. For eosin the loss of 25% during the transit of the first tank should result in a total loss of

approx. 24% and confirmed our experimental result. Recovery rates of only 87 resp. 79 % for bromide were also found during former experiments in horizontal flow wetland plants [9]. Since our hydraulic experiments were started early in the year (April) when plants were not developed an uptake of the tracer substances by the plants had not to be taken into account.

CONCLUSIONS

Our determinations of the hydraulic permeability in two different planted units confirmed some authors' statements, that a compact root mesh forming in the subsoil might decrease the hydraulic conductivity of a coarse grading soil material. A comparison of several fluorescent dyes and bromide as a conservative tracer shows that the latter exhibited the highest recovery rate of approx. 80%. In contrast, the loss of the dyes was found between approx. 70 - 97 % after passage of the wetland plant and hence the dyes were not as suitable as bromide. On the other hand, bromide showed a slight retardation during the passage of the cascade (approx. 10%) and did not exactly reflect the time of residence of water.

ACKNOWLEDGEMENT: The authors thank Prof. Dr. Schramel and Dr. Michalke (both members of the GSF-Institut für Ökologische Chemie in Germany) for IC-analysis of the bromide samples.

REFERENCES

- [1] Portier, R. J. and Palmer, S. J.: Wetlands microbiology: form, function, processes. In: *Constructed Wetlands for Wastewater Treatment: Municipal, Industrial and Agricultural*. (Edited by D. A. Hammer), 89-105, Lewis Publishers, (1989), Chelsea, M.I.
- [2] Hölting B.: *Hydrologie*, 134-135, Stuttgart (1984)
- [3] Waters, M. T., Pilgrim, D. H., Schulz, T. J. Pilgrim, I. D.: Variability of Hydraulic Response of Constructed Wetlands. In: *Hydraulic Engineering Vol. 1*, 406 - 411 *Proceedings of the 1993 Conference*, San Francisco, 1993 H.W. Shen, S.T. Su, F. Weng (editors)
- [4] Fisher P. J.: Hydraulic Characteristics of Constructed Wetlands at Richmond, NSW, Australia. In: *Constructed Wetlands in Water Pollution Control*, 21-31, Cambridge 1990 P. F. Cooper, B. C. Findlater S. (editors)
- [5] Käss, W.: Modern methods of labelling techniques. *Wasserkalender*, 25 - 49, (1991)
- [6] Hofman, A., Rott, J., Sauer, G.: Investigations to the analytics of tracers for the indication of pore ground water and the biological degradability of fluorescent dyes. Report of the Technical University Berlin, 1993

- [7] Behrens, H.: Eine verbesserte Nachweismethode für Fluoreszenzindikatoren und ihre Anwendung zur Feststellung von Fließwegen im Grundwasser. An improved determination method of fluorescent indicators and their application for the identification of flow paths in groundwater. *Zeitschr. Deutsch. Geol. Ges.* 124, 399 - 416 (1973)
- [8] Behrens, H.: Water Tracer Chemistry: A Factor Determining Performance and Analytics of Tracers: Proc. 5th Int. Sympos. on Underground Water Tracing, Institute of Geology and Mineral Exploration, Athens, 121 - 133 (1986)
- [9] Netter R.: Flow Characteristics of Planted Soil Filters. *Wat. Sci. Tech.* **29**(4), 37-44, (1994)
- [10] Netter R. and Bischofsberger H.: Hydraulic investigations on planted soil filters In: *Constructed Wetlands in Water Pollution Control*, Cambridge 1990. P. F. Cooper, B. C. Findlater S. (editors)
- [11] Netter, R., Behrens, H.: Application of different water tracers for investigation of constructed wetlands hydraulics In: *Tracer Hydrology*, 125 - 129 *Proceedings of the 6th International Symposium on Water Tracing*, Karlsruhe 1992, H. Hötzl, A. Werner (editors)

Received for publication: August 04, 1998

Accepted for publication: August 31, 1998